

# NTC Type B Series

## Glass Coated Bead Thermistors



### Features

#### Type B05/07/10/14

Small glass coated bead thermistors on fine diameter platinum alloy lead-wires.

- Extremely small sizes
- Very fast thermal response times
- Low heat capacity and high power sensitivity
- Special thin glass coatings provide hermetic seal
- Suitable for self-heated applications such as: gas chromatography, thermal conductivity analysis or gas flow measurement
- Normal operating/storage temperatures range from
- -112°F (-80°C) to: 221°F (105°C) for Material system E0, 392°F (200°C) for Material systems A1 through A4, 572°F (300°C) for Material systems A5 through D17
- Unaffected by severe environmental exposures, including nuclear radiation
- Intermittent operation to 1112°F (600°C) is permissible, however, stability will be degraded

#### Type B35/43

Large glass coated bead thermistors on fine diameter platinum alloy lead-wires.

- Suitable for most low cost temperature measurement, control or compensation applications.
- Special thin glass coatings provide hermetic seal
- Suitable for self-heated applications such as liquid level sensing or gas flow measurement
- Normal operating/storage temperatures range from
- -112°F (-80°C) to: 221°F (105°C) for Material system E0, 392°F (200°C) for Material systems A1 through A4, 572°F (300°C) for Material systems A5 through D17
- Unaffected by severe environmental exposures, including nuclear radiation
- Intermittent operation to 1112°F (600°C) is permissible, however, stability will be degraded



# Type B Series Specifications

## Type B05/07/10/14

### Thermal and Electrical Properties

The following lists the thermal and electrical properties for all small glass coated thermistors. All definitions and test methods per MIL-PRF-23648.

### Body Dimensions

#### B05

- Nominal diameter: 0.005 in (0.13 mm)
- Maximum diameter: 0.0065 in (0.17 mm)
- Maximum length: 0.012 in (0.30 mm)

#### B07

- Nominal diameter: 0.007 in (0.18 mm)
- Maximum diameter: 0.0085 in (0.22 mm)
- Maximum length: 0.014 in (0.36 mm)

#### B10

- Nominal diameter: 0.010 in (0.25 mm)
- Maximum diameter: 0.0115 in (0.29 mm)
- Maximum length: 0.020 in (0.510 mm)

#### B14

- Nominal diameter: 0.014 in (0.36 mm)
- Maximum diameter: 0.016 in (0.417 mm)
- Maximum length: 0.030 in (0.76 mm)

### Lead-Wires

#### B05

- Nominal diameter: 0.0007 in (0.02 mm)
- Maximum lead length: 0.312 in (7.9 mm)
- Lead material: platinum alloy
- Available cuts: "J" adjacent (stubs), "K" adjacent or "P" opposite

#### B07


- Nominal diameter: 0.0007 in (0.02 mm)
- Maximum lead length: 0.312 in (7.9 mm)
- Lead material: platinum alloy
- Available cuts: "J" adjacent (stubs), "K" adjacent or "P" opposite

#### B10

- Nominal diameter: 0.0011 in (0.03 mm)
- Maximum lead length: 0.312 in (7.9 mm)
- Lead material: platinum alloy
- Available cuts: "J" adjacent (stubs), "K" adjacent or "P" opposite

#### B14

- Nominal diameter: 0.0011 in (0.03 mm)
- Maximum lead length: 0.312 in (7.9 mm)
- Lead material: platinum alloy
- Available cuts: "J" adjacent (stubs), "K" adjacent or "P" opposite

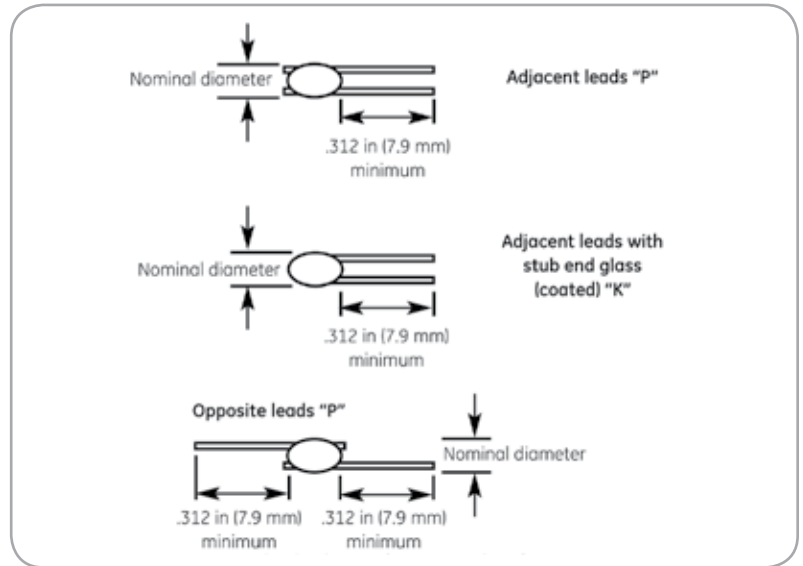

Type B05/07/10/14 and Type B35/43 dimensions

## Material System (Table A)

Code Letter	R vs T Curve	25/125 Ratio	Nominal Resistance Range at 77°F (25°C)			
			B05	B07	B10	B14
E	0	5.0	-	-	-	-
A	1	11.8	1 to 1.5 kΩ	1 to 1.5 kΩ	300 to 680 Ω	300 to 680 Ω
A	2	12.5	1.5 to 3.6 kΩ	1.5 to 3.6 kΩ	680 to 1.6 kΩ	680 to 1.6 kΩ
A	3	14	3.6 to 7.5 kΩ	3.6 to 7.5 kΩ	1.6 to 3.6 kΩ	1.6 to 3.6 kΩ
A	4	16.9	7.5 to 15 kΩ	7.5 to 15 kΩ	3.6 to 6.8 kΩ	3.6 to 6.8 kΩ
A	5	19.8	15 to 3.6 kΩ	15 to 51 kΩ	6.8 to 27 kΩ	6.8 to 27 kΩ
A	6	22.1	-	-	-	-
A	7	22.7	51 to 150 kΩ	51 to 150 kΩ	27 to 75 kΩ	27 to 75 kΩ
B	8	29.4	150 to 270 kΩ	150 to 270 kΩ	75 to 130 kΩ	75 to 130 kΩ
B	9	30.8	270 to 470 kΩ	270 to 470 kΩ	130 to 240 kΩ	130 to 240 kΩ
B	10	32.3	470 to 750 kΩ	470 to 750 kΩ	240 to 360 kΩ	240 to 360 kΩ
B	11	35.7	750 to 1.6 MΩ	750 to 1.6 MΩ	360 to 820 kΩ	360 to 820 kΩ
B	12	38.1	1.6 to 2.7 MΩ	1.6 to 2.7 MΩ	820 to 1.3 MΩ	820 to 1.3 MΩ
B	13	45	2.7 to 6.8 MΩ	2.7 to 6.8 MΩ	1.3 to 3.36 MΩ	1.3 to 3.36 MΩ
B	14	48.1	6.8 to 10 MΩ	6.8 to 10 MΩ	3.3 to 6.86 MΩ	3.3 to 6.86 MΩ
B	15	56.5	-	-	6.8 to 10 MΩ	6.8 to 10 MΩ
D	16	75.6	-	-	-	-
D	17	81	-	-	-	-

# Type B Series Specifications

## Thermal Time Constant

### B05

- Still air at 77°F (25°C): 0.12 second
- Plunge into water: 5.0 msec

### B07

- Still air at 77°F (25°C): 0.23 second
- Plunge into water: 7.0 msec

### B10

- Still air at 77°F (25°C): 0.5 second
- Plunge into water: 10 msec

### B14

- Still air at 77°F (25°C): 1 second
- Plunge into water: 15 msec

## Dissipation Constant

### B05

- Still air at 77°F (25°C): 0.045 mW/°C
- Still water at 77°F (25°C): 0.23 mW/°C

### B07

- Still air at 77°F (25°C): 0.06 mW/°C
- Still water at 77°F (25°C): 0.3 mW/°C

### B10

- Still air at 77°F (25°C): 0.09 mW/°C
- Plunge into water: 0.45 mW/°C

### B14

- Still air at 77°F (25°C): 0.10 mW/°C
- Plunge into water: 0.50 mW/°C

## Power Rating (In Air)

### B05

- Maximum Power Rating: 0.006 W
- 100% Maximum Power To: 77°F (25°C)
- Derated to 0% at: 392°F (200°C)

### B07

- Maximum Power Rating: 0.008 W
- 100% Maximum Power To: 77°F (25°C)
- Derated to 0% at: 392°F (200°C)

### B10

- Maximum Power Rating: 0.010 W
- 100% Maximum Power To: 77°F (25°C)
- Derated to 0% at: 392°F (200°C)

### B14

- Maximum Power Rating: 0.014 W
- 100% Maximum Power To: 77°F (25°C)
- Derated to 0% at: 392°F (200°C)

## Options

- Non-standard resistance tolerances
- Non-standard resistance values
- Reference temperature(s) other than 77°F (25°C)-specify
- Mounting in special housings or enclosures
- Longer continuous leads
- Welded or soldered extension leads-specify lead material, diameter, length, and insulation, if any
- Solderable or weldable/solderable leads
- Calibration-specify temperature(s)
- Interchangeable pairs or sets, R-vs-T curve matching-specify temperature range(s) and tolerance(s)
- Special aging and conditioning for high reliability applications

## Type B35/43

### Thermal and Electrical Properties

The following lists the thermal and electrical properties for all large glass coated thermistors. All definitions and test methods per MIL-PRF-23648.

### Body Dimensions

#### B35

- Nominal diameter: 0.035 in (0.893 mm)
- Maximum diameter: 0.043 in (1.1 mm)
- Maximum length: 0.075 in (1.9 mm)

#### B43

- Nominal diameter: 0.043 in (1.1 mm)
- Maximum diameter: 0.050 in (1.32 mm)
- Maximum length: 0.100 in (2.5 mm)

### Lead-Wires

#### B35

- Nominal diameter: 0.004 in (0.10 mm)
- Maximum lead length: 0.312 in (7.9 mm)
- Lead material: platinum alloy
- Available cuts: "J" adjacent (stubs), "K" adjacent or "P" opposite

#### B43

- Nominal diameter: 0.004 in (0.102 mm)
- Maximum lead length: 0.312 in (7.9 mm)
- Lead material: platinum alloy
- Available cuts: "J" adjacent (stubs), "K" adjacent or "P" opposite

## Material System (Table B)

Code Letter	R vs T Curve	25/125 Ratio	Nominal Resistance Range at 77°F (25°C)	
			B35	B43
E	0	5.0	30 to 51 Ω	30 to 51 Ω
A	1	11.8	51 to 150 Ω	51 to 150 Ω
A	2	12.5	150 to 360 Ω	150 to 360 Ω
A	3	14	360 to 750 Ω	360 to 750 Ω
A	4	16.9	750 to 1.5 kΩ	750 to 1.5 kΩ
A	5	19.8	1.5 to 3.6 kΩ	1.5 to 3.6 kΩ
A	6	22.1	3.6 to 6.2 kΩ	3.6 to 6.2 kΩ
A	7	22.7	6.2 to 9.1 kΩ	6.2 to 9.1 kΩ
B	8	29.4	9.1 to 27 kΩ	9.1 to 27 kΩ
B	9	30.8	27 to 43 kΩ	27 to 43 kΩ
B	10	32.3	43 to 75 kΩ	43 to 75 kΩ
B	11	35.7	75 to 160 kΩ	75 to 160 kΩ
B	12	38.1	160 to 360 kΩ	160 to 360 kΩ
B	13	45	360 to 750 kΩ	360 to 750 kΩ
B	14	48.1	750 to 1.5 MΩ	750 to 1.5 MΩ
B	15	56.5	1.5 to 3.0 MΩ	1.5 to 3.0 MΩ
D	16	75.6	3.0 to 8.2 MΩ	3.0 to 8.2 MΩ
D	17	81	8.2 to 20 MΩ	8.2 to 20 MΩ

### Thermal Time Constant

#### B35

- Still air at 77°F (25°C): 4.5 second
- Plunge into water: 100 msec

#### B43

- Still air at 77°F (25°C): 5.5 second
- Plunge into water: 140 msec

### Dissipation Constant

#### B35

- Still air at 77°F (25°C): 0.30 mW/°C
- Still water at 77°F (25°C): 1.50 mW/°C

#### B43

- Still air at 77°F (25°C): 0.35 mW/°C
- Still water at 77°F (25°C): 2.00 mW/°C

### Power Rating (In Air)

#### B35

- Maximum Power Rating: 0.035 W
- 100% Maximum Power To: 302°F (150°C)

#### B43

- Maximum Power Rating: 0.035 W
- 100% Maximum Power To: 302°F (150°C)
- Derated to 0% at: 572°F (300°C)

## Options

- Non-standard resistance tolerances
- Non-standard resistance values
- Reference temperature(s) other than 77°F (25°C) - specify
- Mounting in special housings or enclosures
- Longer continuous leads
- Welded or soldered extension leads - specify lead material, diameter, length, and insulation, if any
- Solderable or weldable/solderable leads
- Calibration - specify temperature(s)
- Interchangeable pairs or sets, R-vs-T curve matching; specify temperature range(s) and tolerance(s)
- Special aging and conditioning for high reliability applications

## Ordering Information

The code number to be ordered may be specified as follows:

Code	Type																								
B	Glass coated bead structure																								
	<table border="1"> <thead> <tr> <th>Code</th> <th>Diameter</th> </tr> </thead> <tbody> <tr><td>05</td><td>05 mils</td></tr> <tr><td>07</td><td>07 mils</td></tr> <tr><td>10</td><td>10 mils</td></tr> <tr><td>14</td><td>14 mils</td></tr> <tr><td>35</td><td>35 mils</td></tr> <tr><td>43</td><td>43 mils</td></tr> </tbody> </table>	Code	Diameter	05	05 mils	07	07 mils	10	10 mils	14	14 mils	35	35 mils	43	43 mils										
Code	Diameter																								
05	05 mils																								
07	07 mils																								
10	10 mils																								
14	14 mils																								
35	35 mils																								
43	43 mils																								
	<table border="1"> <thead> <tr> <th>Code</th> <th>Lead Configuration</th> </tr> </thead> <tbody> <tr><td>J</td><td>Adjacent leads</td></tr> <tr><td>K</td><td>Adjacent leads with stub ends glass coated</td></tr> <tr><td>P</td><td>Opposite leads</td></tr> </tbody> </table>	Code	Lead Configuration	J	Adjacent leads	K	Adjacent leads with stub ends glass coated	P	Opposite leads																
Code	Lead Configuration																								
J	Adjacent leads																								
K	Adjacent leads with stub ends glass coated																								
P	Opposite leads																								
	<table border="1"> <thead> <tr> <th>Code</th> <th>Material System Code</th> </tr> </thead> <tbody> <tr><td>X</td><td>See table A or table B for code number</td></tr> </tbody> </table>	Code	Material System Code	X	See table A or table B for code number																				
Code	Material System Code																								
X	See table A or table B for code number																								
	<table border="1"> <thead> <tr> <th>Code</th> <th>Power</th> </tr> </thead> <tbody> <tr><td>X</td><td>Zero-power resistance as 77°F (25°C) (see note 2 for code number)</td></tr> </tbody> </table>	Code	Power	X	Zero-power resistance as 77°F (25°C) (see note 2 for code number)																				
Code	Power																								
X	Zero-power resistance as 77°F (25°C) (see note 2 for code number)																								
	<table border="1"> <thead> <tr> <th>Code</th> <th>Tolerance*</th> </tr> </thead> <tbody> <tr><td>F</td><td>1</td></tr> <tr><td>G</td><td>2</td></tr> <tr><td>J</td><td>5</td></tr> <tr><td>K</td><td>10</td></tr> <tr><td>L</td><td>15</td></tr> <tr><td>M</td><td>20</td></tr> <tr><td>N</td><td>25</td></tr> <tr><td>P</td><td>30</td></tr> <tr><td>Q</td><td>40</td></tr> <tr><td>R</td><td>50</td></tr> <tr><td>S</td><td>Non-standard (consult factory)</td></tr> </tbody> </table>	Code	Tolerance*	F	1	G	2	J	5	K	10	L	15	M	20	N	25	P	30	Q	40	R	50	S	Non-standard (consult factory)
Code	Tolerance*																								
F	1																								
G	2																								
J	5																								
K	10																								
L	15																								
M	20																								
N	25																								
P	30																								
Q	40																								
R	50																								
S	Non-standard (consult factory)																								
B -	Typical model number																								

Special tolerances are available upon request. Consult factory for special resistance tolerances, non-standard resistances and/or non-standard temperatures.

\*The zero-power resistance at 77°F (25°C), expressed in Ω, is identified by a three digit code number. The first two digits represent significant figures, and the last digit specifies the number of zeros to follow. Example: 10k Ω = "103". The standard resistance values are from the 24-Value series decade as specified in Military Standard MS90178.  
1.0 / 1.1 / 1.2 / 1.3 / 1.5 / 1.6 / 1.8 / 2.0 / 2.2 / 2.4 / 2.7 / 3.0  
3.3 / 3.6 / 3.9 / 4.3 / 4.7 / 5.1 / 5.6 / 6.2 / 6.8 / 7.5 / 8.2 / 9.1

# Amphenol

## Advanced Sensors

[www.amphenol-sensors.com](http://www.amphenol-sensors.com)

© 2014 Amphenol Corporation. All Rights Reserved. Specifications are subject to change without notice. Other company names and product names used in this document are the registered trademarks or trademarks of their respective owners.