



Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

- NOTES:**
- MATERIAL**
1. Insulator Material: PBT +30%GF(UL94V-0), Grey
 2. Contact Material : Brass
 3. Contact Plating : Gold flash/Tin Over Ni
 - ④ AWHW xxA-0102-T: 30u" Au/Tin Over Ni
 - AWHW xxA-0202-T: Gold flash/Tin Over Ni

- ELECTRICAL**
1. Current Rating : 3AMP
 2. Withstand Voltage : 500V AC/Minute
 3. Contact Resistance : 20mΩ max
 4. Insulation Resistance: 1000MΩ min
- ENVIRONMENTAL**
1. Operation Temperature: -40°C to +105°C
 2. Packing : Tray packing

Order information:
xx : 06,08,10,12,14,16,18,20,24
26,30,34,40,50,60,64

| Dimension antitheses list | |
|---------------------------|------|
| NO. Pin | L |
| 6P-8P | 4,00 |
| 10P-64P | 4,40 |

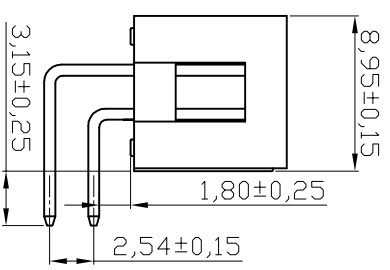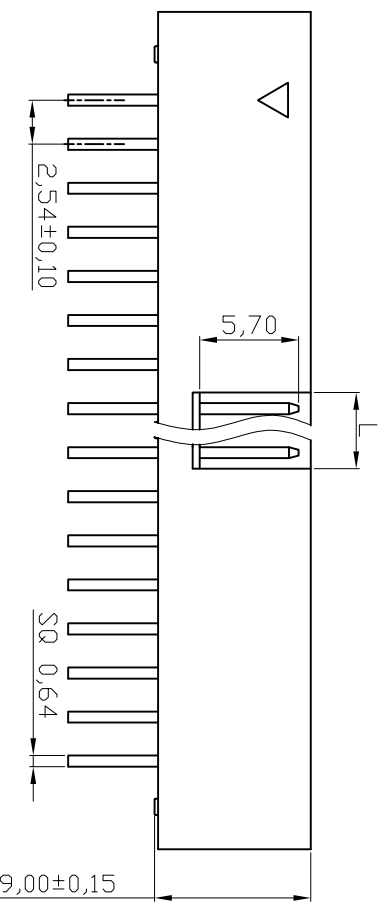

RoHS compliant
Unit: mm



| Scale | Free | Date | | Name | |
|-----------|-------|----------|------------|--------|--|
| TOLERANCE | | Drawn | 25.01.2006 | Alex | |
| X.X | ±0.40 | Approved | 12.12.2013 | Winnie | |
| X.XX | ±0.25 | | | | |
| X.XXX | ±0.15 | | | | |
| DIM | TOL | Update | 29.06.2009 | Dean | |
| Angle | ±3° | Drawn | 25.01.2006 | Alex | |
| | | Id. | | | |



Customer-No. ASSMANN WSW-No.
AWHW xxA-0202-T
④ AWHW xxA-0102-T

Drawing-No. ASS 2315 CO rev04
Replace Sheet

| | | | | | | | |
|---|---|---|---|---|---|---|--------|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | SV/xxx |
|---|---|---|---|---|---|---|--------|