HSF

NOTES:
Rated Current: 2.0AMP.
Contact Resistance: 20mΩ Max.
Withstand Voltage: 500V AC/DC
Insulation Resistance: 1000MΩ Min.
Operation Temperature: −40℃ to +125℃(GOLD)
−40℃ to +105℃(TIN) A2

Contact Material: Brass
Contact Plating: Au or Sn Over Ni
Insulator Material: PA9T+33%G.F UL94V-0 BK

Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE±0.05)

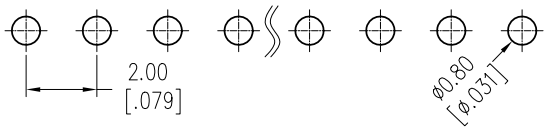

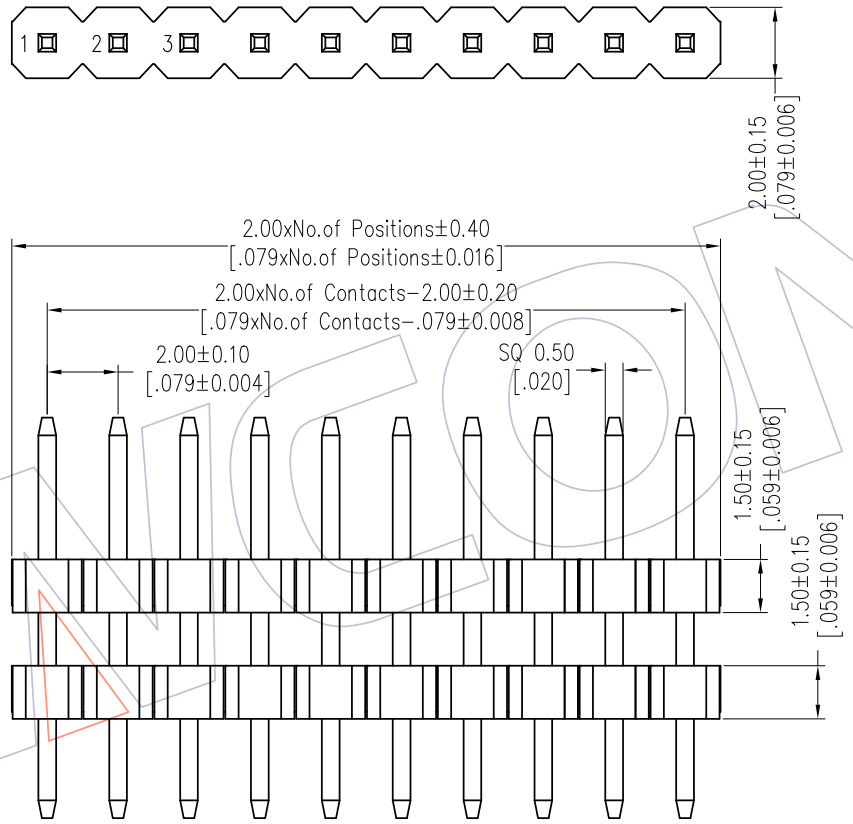

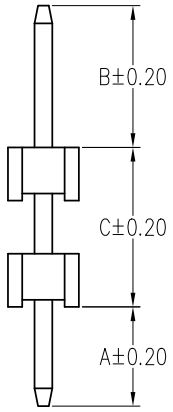

TYPE 1



TYPE 2

Ordering Information

1215-21 XX XX S XXX C 0 XX A1

A3

No.of Pins	Contact Plating	Pin Length	Insulator Material	Packing	Series No.
02~40	G0=Gold Flash G3=10u"Gold G4=15u"Gold G5=30u"Gold S0=Gold Flash/Tin S3=10u"Gold/Tin S4=15u"Gold/Tin S5=30u"Gold/Tin SN=Tin SM=Matte Tin	L=A+B+C Standard:	C=PA9T	0=PE Bag T=Tube	01~99

Item	Pin Length	A	B	C	Mating
Standard	---	2.80	2.00	---	2220T 2221 2227T 2228
	---	2.80	3.00	---	2235
	---	2.80	4.00	---	2240 2243 2263 2272
	13.00	3.00	3.00	7.00	
	17.00	3.80	3.40	9.80	

A2

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A3	2020/06/12	Modify Pin 02~40P A3	Dalfing
A2	2019/03/04	Modify A2	Ding
A1	2018/01/18	Modify P/N A1	------
A0	2012/04/18	NEW	------

OPERATION	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
Angle	± 3°
DIM	TOL

DRAW	Dalfing	DATE 2020/06/12
CHECK		DATE
APPROVE		DATE

SCALE	Fit
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

PART NO. 1215-21XXXXSXXXC0XX A1

TITLE: PH2.00 SINGLE ROW DOUBLE PLASTIC 180° H=1.5

Customer NO.

WCON
Http: www.wcon.com

WCON-Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com

WCON-Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: salesks@wcon.com