

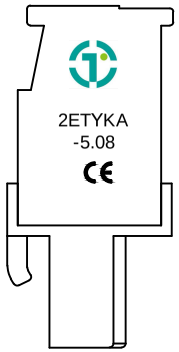

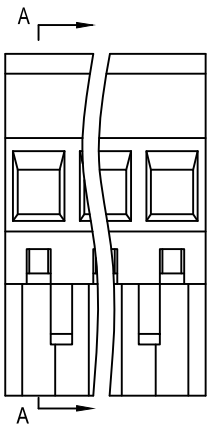

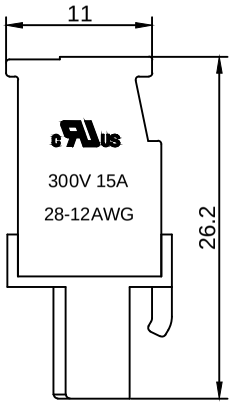

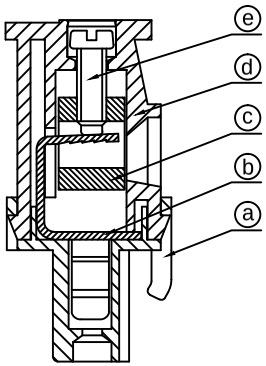



Material :

- ⓐ Cover : PA66(UL94V-0)
- ⓑ Contact : Phosphor Bronze
- ⓒ Cage : Brass , Ni Plated
- ⓓ Housing : PA66(UL94V-0)
- ⓔ Screws : Steel , Cr^{3+}Zn Plated

Electrical :

	UL	IEC
1.Rated Voltage :	300V	320V
2.Rated Current :	15A	10A
3.Torque Value :	M2.5 , 3.54Lb.in	M2.5 , 0.4N.m
4.Wire Range:	28-12AWG	$2.5mm^2$

5.Stripping Length : 7-8mm
6.Withstanding Voltage : AC1600V/1Min.
7.Operating Temperature : -40°C~+105°C
8.RoHS Compliance
9.Safety Approval : cULus
10.Undimensioned Tolerances:

Pitch Range In mm			Nominal Dimension Range In mm					— ⌒ ⌭
≤6	6 ~ 10	10 ~ 24	≤30	30 ~ 60	60 ~ 100	100 ~ 150	>150	0.05/10 ∠
±0.10	±0.15	±0.25	±0.20	±0.30	±0.50	±0.70	±1.00	±0.1°

2ETYKA - 5.08 - XXP - X X - 100 AH
① ② ③ ④ ⑤ ⑥ ⑦

① Series No.

② Pitch

③ Poles
- 02 02Contacts
- 03 03Contacts
- ...
- 24 24Contacts

④ 1 Single Pitch
2 Double Pitch

⑤ Color:
1 Grey
2 Blue
3 Black
4 Green(Standard For AH)
5 Orange
6 Red
7 Transparent
8 Yellow
9 White

⑥ Customer Request: 00--Standard M2.5

⑦ AH--Standard(PA66)

TOPONELEC 拓宜(上海)工控电器设备有限公司
Topone(Shanghai) Industrial Control Electrical Equipment Co., LTD.

APPD: 9/16/16 '	PART NO. 2ETYKA-5.08-XXP-XX-100 AH		
CHKD: 9/15/16 '			
DRFT: 9/14/16 '	DRAWING NO.	REV	1
		SHEET	1/1
THIRD ANGLE PROJECTION	MM (INCH) DO NOT SCALE DRAWING	SCALE	1/1

DETACHED LISTS