



Wall Industries, Inc.

DCQEB75 SERIES

2:1 Input Voltage Ranges
Industry Standard Quarter-Brick Package
Up to 75 Watts, Single Outputs
DC/DC Power Converters



FEATURES

- Up to 75 Watts Output Power
- Single Outputs
- Output Current up to 25A
- Industry Standard Quarter-Brick Package: 2.28" x 1.45" x 0.50"
- Under Voltage Lockout
- Fixed Switching Frequency
- Input to Output Isolation: 1600VDC
- 2:1 Wide Input Voltage Range
- High Efficiency up to 90%
- No Minimum Load Required
- Adjustable Output Voltage
- Threaded Inserts and Thru-Hole Inserts Available
- Short Circuit, Over Voltage, Over Current, and Over Temp. Protection
- Compliant to RoHS EU Directive 2002/95/EC
- CE Mark Meets 2006/95/CE, 93/68/EEC, and 2004/108/EC
- UL60950-1, EN60950-1, and IEC60950-1 Safety Approvals (See Note 12)

APPLICATIONS

- Telecom/Datacom
- Wireless Networks
- Industry Control Systems
- Semiconductor Equipment
- Distributed Power Architectures

OPTIONS

- Heatsinks
- Pin Lengths
- Thru-Hole Inserts
- Negative Logic Remote ON/OFF

DESCRIPTION

The DCQEB75 series of DC/DC power converters provides up to 75 Watts of output power in an industry standard 2.28" x 1.45" x 0.50" quarter-brick package and footprint. This series consists of single output models with 2:1 input voltage ranges of 18-36VDC or 36-75VDC. Some features include high efficiency up to 90%, adjustable output voltage, remote sense, and positive or negative remote ON/OFF control. This series is RoHS compliant and has UL60950-1, EN60950-1, and IEC60950-1 safety approvals (see note 12). Several different options are available for this series including negative remote ON/OFF control, heatsinks, pin lengths, and thru-hole inserts. Please call factory for more details.

SPECIFICATIONS: DCQEB75 SERIES

All specifications are based on 25°C, Nominal Input Voltage, and Maximum Output Current unless otherwise noted.
We reserve the right to change specifications based on technological advances.

SPECIFICATION			TEST CONDITIONS		Min	Nom	Max	Unit
INPUT SPECIFICATIONS								
Input Voltage Range			24VDC nominal input models		18	24	36	VDC
			48VDC nominal input models		36	48	75	
Start-up Voltage			24VDC nominal input models				18	VDC
			48VDC nominal input models				36	
Shutdown Voltage			24VDC nominal input models		15			VDC
			48VDC nominal input models		32			
Input Surge Voltage			24VDC nominal input models		100ms		50	VDC
			48VDC nominal input models				100	
Input Current						See Table		
Input Filter						L-C Type		
OUTPUT SPECIFICATIONS								
Output Voltage					See Table			
Line Regulation			Low line to high line at full load		-0.2		+0.2	%
Load Regulation			No load to full load		-0.3		+0.3	%
Voltage Accuracy					-1.5		+1.5	%
Voltage Adjustability (See Note 5)					-20		+10	%
Output Power					See Table			
Output Current					See Table			
Minimum Load					0			%
Ripple & Noise			Measured at nominal input and full load with 20MHz BW and 1µF M/C and 10µF T/C capacitors in parallel.			100		mVp-p
Transient Response Recovery Time			25% load step change			200		µs
Start-Up Time	Power Up	Nominal input and constant resistive load					25	ms
	Remote ON/OFF					25	ms	
Remote Sense (See Note 5)						10		% Vo
Temperature Coefficient					-0.02		+0.02	%/°C
PROTECTION								
Over Voltage Protection Threshold			Non-latching Hiccup				120	% Vo
Over Current Protection Threshold					110		140	% Io
Short Circuit Protection					Hiccup, automatic recovery			
Over Temperature Protection							+110	°C
GENERAL SPECIFICATIONS								
Efficiency			Nominal input and full load		See Table			
Switching Frequency					243	270	297	KHz
Isolation Voltage	Input to Output	For 1 minute			1600			VDC
	Input to Base-plate	For 1 minute			1000			VDC
	Output to Base-plate	For 1 minute			1000			VDC
Isolation Resistance					10			MΩ
Isolation Capacitance							2500	pF
REMOTE ON/OFF (See Note 6)								
Positive Logic (standard)	DC/DC ON				Open or 3V < Vr < 15V			
	DC/DC OFF				Short or 0V < Vr < 1.2V			
Negative Logic (optional)	DC/DC ON				Short or 0V < Vr < 1.2V			
	DC/DC OFF				Open or 3V < Vr < 15V			
Input Current of Remote Control Pin			Nominal input		-0.5		1	mA
Remote Off Input Current			Nominal input			2.5		mA
ENVIRONMENTAL SPECIFICATIONS								
Operating Base-Plate Temperature (See Note 7)					-40		+100	°C
Storage Temperature					-55		+125	°C
Relative Humidity			Non-condensing		5		95	% RH
Thermal Shock					MIL-STD-810F			
Vibration					MIL-STD-810F			
MTBF (See Note 1)	BELLCORE TR-NWT-000332				2,500,000			Hours
	MIL-HDBK-217F				442,200			Hours
PHYSICAL SPECIFICATIONS								
Weight					1.46oz (42g)			
Dimensions (L x W x H)					2.28 x 1.45 x 0.50 inches (57.9 x 36.8 x 12.7 mm)			
Case Material					Aluminum base-plate			
SAFETY & EMC CHARACTERISTICS								
Safety Approvals					UL60950-1, IEC60950-1, EN60950-1 (DCQEB75-48S1.8, 48S2.5, 48S3.3, and 48S05 have approvals; approvals pending for all other models)			
EMI (See Note 8)			EN55022		Class A			
Radiated Immunity			EN61000-4-3		10 V/m		Perf. Criteria A	
Fast Transient (See Note 9)			EN61000-4-4		±2KV		Perf. Criteria B	
Surge (See Note 9)			EN61000-4-5		±1KV		Perf. Criteria B	
Conducted Immunity			EN61000-4-6		10 Vrms		Perf. Criteria A	

MODEL SELECTION TABLE									
Model Number ⁽¹²⁾	Input Voltage Range	Output Voltage	Output Current		Ripple & Noise ⁽⁴⁾	Input Current		Output Power	Efficiency ⁽⁴⁾
			Min. load	Full load		No Load ⁽³⁾	Full Load ⁽²⁾		
DCQEB75-24S3.3	24VDC (18 - 36 VDC)	3.3 VDC	0mA	20A	100mVp-p	65mA	3198mA	66W	89%
DCQEB75-24S05		5 VDC	0mA	15A	100mVp-p	110mA	3634mA	75W	90%
DCQEB75-24S12		12 VDC	0mA	6.25A	100mVp-p	40mA	3662mA	75W	90%
DCQEB75-24S15		15 VDC	0mA	5A	100mVp-p	50mA	3634mA	75W	90%
DCQEB75-48S1.8	48 VDC (36 - 75 VDC)	1.8 VDC	0mA	25A	100mVp-p	60mA	1157mA	45W	85%
DCQEB75-48S2.5		2.5 VDC	0mA	25A	100mVp-p	50mA	1569mA	62.5W	87%
DCQEB75-48S3.3		3.3 VDC	0mA	20A	100mVp-p	70mA	1599mA	66W	90%
DCQEB75-48S05		5 VDC	0mA	15A	100mVp-p	80mA	1817mA	75W	90%
DCQEB75-48S12		12 VDC	0mA	6.25A	100mVp-p	50mA	1831mA	75W	90%
DCQEB75-48S15		15 VDC	0mA	5A	100mVp-p	50mA	1817mA	75W	90%


NOTES

- BELLCORE TR-NWT-000332. Case 1: 80% Stress, Temperature at 40°C. MIL-HDBK-217F Notice2 @Ta=25°C, Full load (Ground, Benign, controlled environment).
- Maximum value at nominal input voltage and full load.
- Typical value at nominal input voltage and no load.
- Typical value at nominal input voltage and full load.
- Maximum output deviation is +10% inclusive of trim. If remote sense is not being used the +SENSE should be connected to its corresponding +OUTPUT and likewise the -SENSE should be connected to its corresponding -OUTPUT.
- The remote ON/OFF control pin voltage is referenced to -INPUT. To order negative logic Remote ON/OFF control add the suffix "R" to the model number (Ex: DCQEB75-48S05R).
- Heatsink is optional and P/N: 7G-0029A-F, 7G-0030A-F, 7G-0031A-F, and 7G-0032A-F.
- The DCQEB75 series meets EN55022 Class A and Class B only with external components added before the input pins to the converter.
- An external input filter capacitor is required if the module has to meet EN61000-4-4 and EN61000-4-5. We recommend Nippon chemi-con KY series, 220μF/100V, ESR 48mΩ.
- BASE-PLATE GROUNDING: EMI can be reduced when you connect the four screw bolts to the shield plane.
- The converter is provided with basic insulation.
- Safety Approvals: DCQEB75-48S1.8, 48S2.5, 48S3.3, and 48S05 have safety approvals; approvals pending for all other models.
- This series comes with several different options: Negative remote ON/OFF control, pin lengths, thru-hole inserts, and heatsinks.


CAUTION: The power module is not internally fused. An input line fuse must always be used.

DERATING

DCQEB75-48S05 Derating Curve

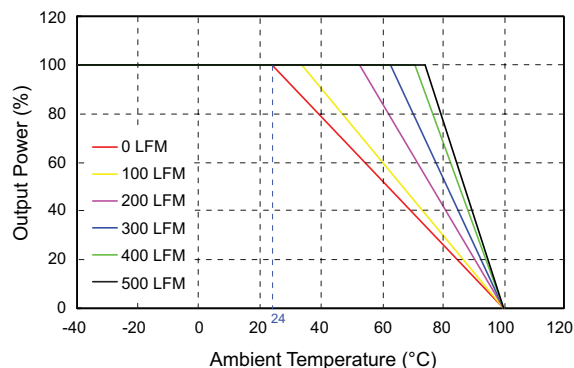


DCQEB75-48S05 Derating Curve
With Heatsink 7G-0029A-F

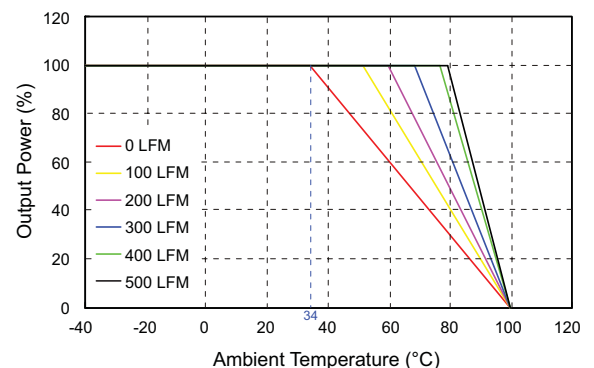


CHARACTERISTICS


DCQEB75-48S05 Efficiency vs Input Voltage

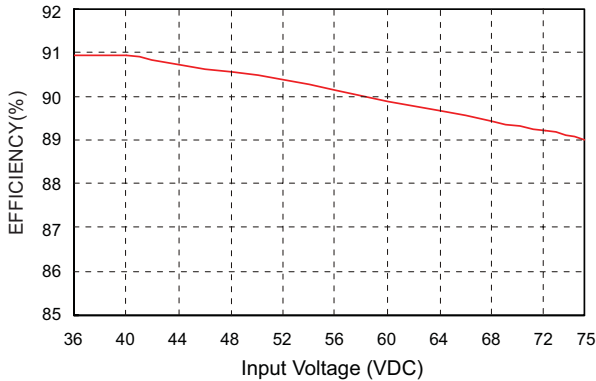

DCQEB75-48S05 Efficiency vs Output Load

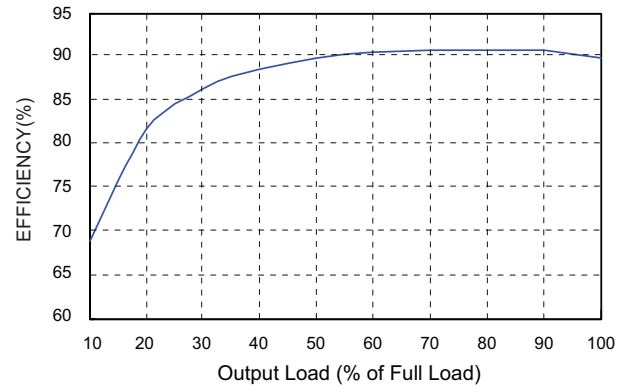


Recommended Filter for EN55022 Class B Compliance

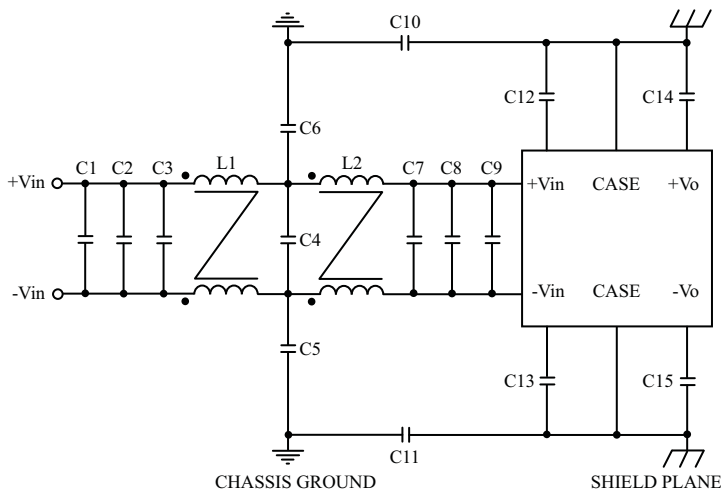

DCQEB75-24Sxx	C1	C2	C3	C4	C5
	6.8µF/50V	6.8µF/50V	6.8µF/50V	6.8µF/50V	1.5nF/3KV
	C6	C7	C8	C9	C10
	1.5nF/3KV	6.8µF/50V	6.8µF/50V	6.8µF/50V	0.1µF/50V
	C11	C12	C13	C14	C15


DCQEB75-48Sxx	C1	C2	C3	C4	C5
	100µF/100V	1.5µF/100V	1.5µF/100V	1.5µF/100V	1.5nF/3KV
	C6	C7	C8	C9	C10
	1.5nF/3KV	47µF/100V	1.5µF/100V	1.5µF/100V	0.1µF/50V
	C11	C12	C13	C14	C15

Recommended EN55022 Class B Filter Circuit Layout

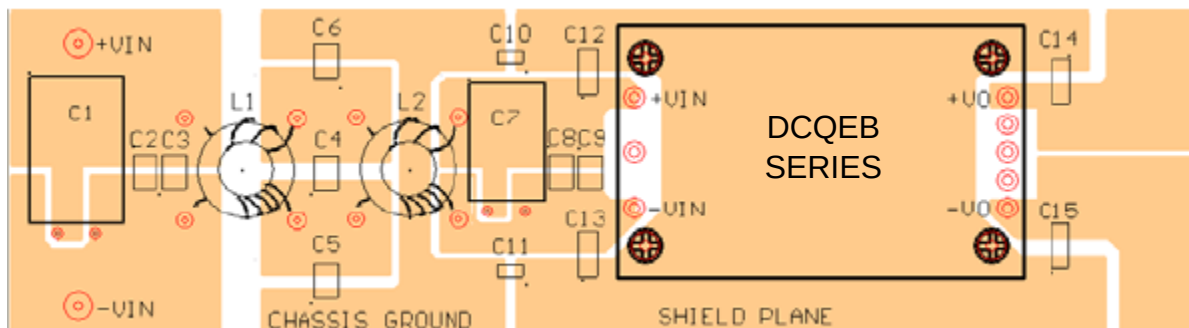

MECHANICAL DRAWING

Unit: inches (mm)

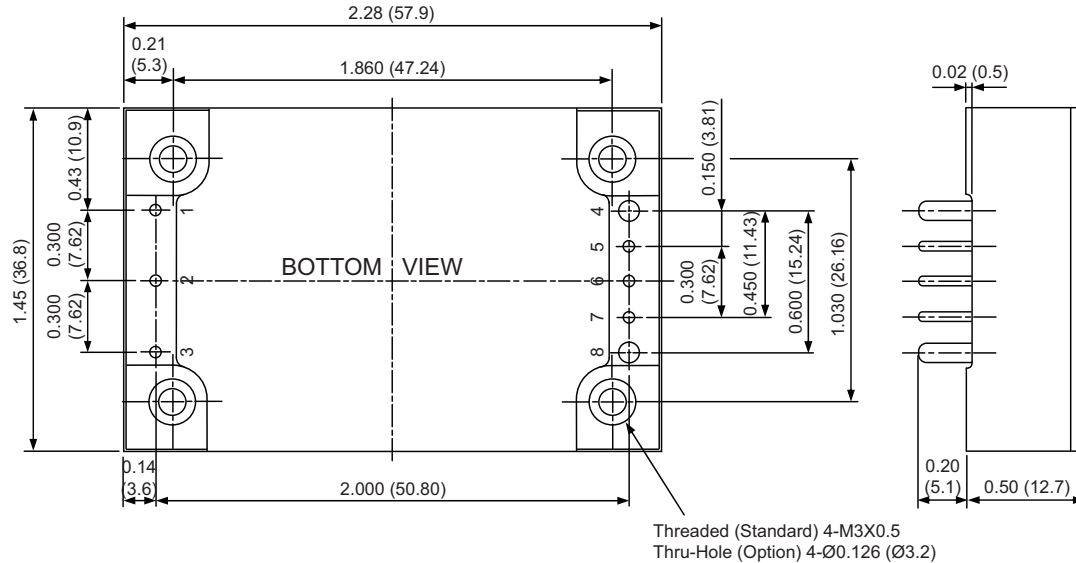

PIN CONNECTIONS		
PIN	FUNCTION	PIN Ø
1	-INPUT	Ø.040 (1.02)
2	CTRL	Ø.040 (1.02)
3	+INPUT	Ø.040 (1.02)
4	-OUTPUT	Ø.060 (1.52)
5	-SENSE	Ø.040 (1.02)
6	TRIM	Ø.060 (1.52)
7	+SENSE	Ø.040 (1.02)
8	+OUTPUT	Ø.060 (1.52)

1. Tolerance: X.XX±0.02 (X.X±0.5)
X.XXX±0.01 (X.XX±0.25)
2. Pin Pitch Tolerance: ±0.01 (±0.25)
3. Pin Dimension Tolerance: ±0.004 (±0.1)

PRODUCT OPTIONS		SUFFIX	PRODUCT OPTIONS		SUFFIX
Positive remote ON/OFF logic	0.200" pin length	none	Heatsinks	7G-0029A-F	H
	0.145" pin length	S		7G-0030A-F	H1
Negative remote ON/OFF logic	0.200" pin length	R		7G-0031A-F	H2
	0.145" pin length	RL		7G-0032A-F	H3
Thru-Hole Inserts ⁽¹⁾	Ø0.126 (Ø3.2) thru-hole (no thread) inserts	TH			
NOTES					
1. Models with thru-hole inserts cannot be equipped with a heatsink.					

EXTERNAL OUTPUT TRIMMING	
Output can be externally trimmed by using the method shown below.	
TRIM UP 7	TRIM DOWN 6

COMPANY INFORMATION

Wall Industries, Inc. has created custom and modified units for over 50 years. Our in-house research and development engineers will provide a solution that exceeds your performance requirements on-time and on budget. Our ISO9001-2008 certification is just one example of our commitment to producing a high quality, well-documented product for our customers.

Our past projects demonstrate our commitment to you, our customer. Wall Industries, Inc. has a reputation for working closely with its customers to ensure each solution meets or exceeds form, fit and function requirements. We will continue to provide ongoing support for your project above and beyond the design and production phases. Give us a call today to discuss your future projects.

Contact **Wall Industries** for further information:

Phone: ☎(603)778-2300
Toll Free: ☎(888)587-9255
Fax: ☎(603)778-9797
E-mail: sales@wallindustries.com
Web: www.wallindustries.com
Address: 5 Watson Brook Rd.
 Exeter, NH 03833