


703-3300 IC Socket, stamped contacts

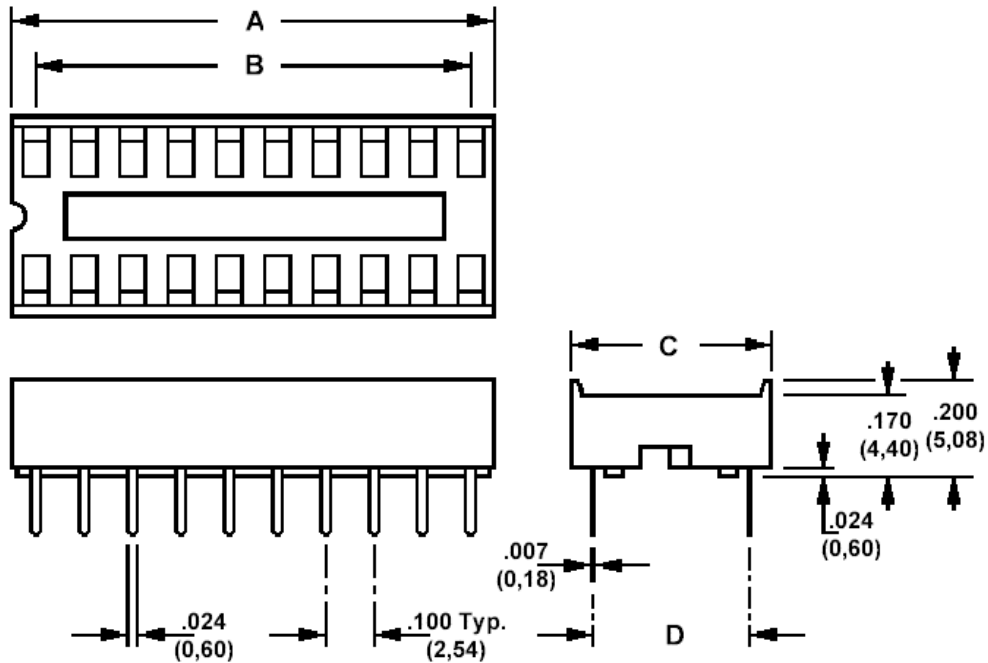

How to order code

703-33XX-YY-04-10

Basic Part No XX = No. of Contacts, YY = Pitch Identifier, ZZ = Plating Finish

DIMENSIONS					
Full Part Number	Contacts (XX)	Dimensions			
		A	B	C	D (YY)
703-3306-01-04-10	6	.300 (7,62)	.200 (5,08)	.400 (10,16)	.300 (7,62)
703-3308-01-04-10	8	.400 (10,16)	.300 (7,62)	.400 (10,16)	.300 (7,62)
703-3314-01-04-10	14	.700 (17,78)	.600 (15,24)	.400 (10,16)	.300 (7,62)
703-3316-01-04-10	16	.800 (20,32)	.700 (17,78)	.400 (10,16)	.300 (7,62)
703-3318-01-04-10	18	.900 (22,86)	.800 (20,32)	.400 (10,16)	.300 (7,62)
703-3320-01-04-10	20	1.000 (25,40)	.900 (22,86)	.400 (10,16)	.300 (7,62)
703-3324-01-04-10	24	1.200 (30,48)	1.100 (27,94)	.400 (10,16)	.300 (7,62)
703-3324-03-04-10	24	1.200 (30,48)	1.100 (27,94)	.700 (17,78)	.600 (15,24)
703-3328-03-04-10	28	1.400 (35,48)	1.300 (33,02)	.700 (17,78)	.600 (15,24)
703-3332-03-04-10	32	1.600 (40,64)	1.500 (38,10)	.700 (17,78)	.600 (15,24)
703-3340-03-04-10	40	2.000 (50,80)	1.900 (48,26)	.700 (17,78)	.600 (15,24)
703-3342-03-04-10	42	2.100 (53,34)	2.000 (50,80)	.700 (17,78)	.600 (15,24)

SPECIFICATIONS		
Component	Material	Finish
		-04
Contact	Phosphor Bronze	Electro Tin
Moulding	Glass filled Polyester UL94V-0	Black
Contact Resistance	16 m Ohms max at 1 Amp DC	
Insulation Resistance	10 G Ohms min.	
Operating Temperature	-55°C to +105°C	

FEATURES
Commercial standard product - for low cost
Glass reinforced polyester moulded body to UL94V-0 - for flame retardancy
Wide target contact area - for ease of insertion
Ladder frame body construction - for improved air flow and low weight
Buttable end to end, and side to side on 0.100" (2,54mm) mounting grid - for maximum board density