GR1505 THRU GR1510


1.5A Leaded Type General Purpose Rectifiers

■ Features

- Axial lead type devices for through hole design.
- High current capability.
- High surge capability.
- Glass passivated chip junction inside.
- Suffix "G" indicates Halogen-free part, ex.GR1505G.
- Lead-free parts meet environmental standards of MIL-STD-19500 /228

■ Outline

DO-15(DO-204AC)

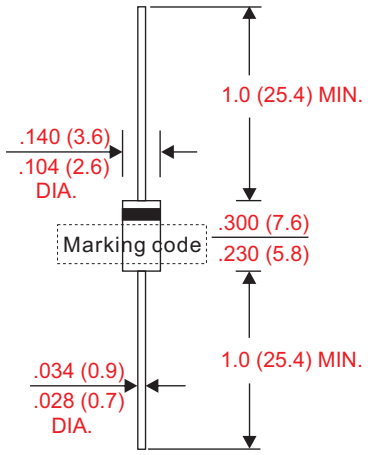

Dimensions in inches and (millimeters)

■ Mechanical data

- Epoxy:UL94-V0 rated flame retardant
- Case : Molded plastic, DO-204AC / DO-15
- Lead : Axial leads, solderable per MIL-STD-202, Method 208 guranteed
- Polarity : Color band denotes cathode end
- Weight : Approximated 0.39 gram

■ Maximum ratings and electrical characteristics

Rating at 25°C ambient temperature unless otherwise specified. Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%.

Parameter	Conditions	Symbol	MIN.	TYP.	MAX.	UNIT
Forward rectified current		I_O			1.5	A
Forward surge current	8.3ms single half sine-wave superimposed on rate load (JEDEC method)	I_{FSM}			50	A
Reverse current	$V_R = V_{RRM}$ $T_A = 25°C$	I_R			1.0	uA
	$V_R = V_{RRM}$ $T_A = 125°C$				300	
Thermal resistance	Junction to ambient	$R_{\theta JA}$		50		°C/W
Diode junction capacitance	f=1MHz and applied 4V DC reverse voltage	C_J		20		pF
Storage temperature		T_{STG}	-50		+150	°C

Symbol	Marking code	Max. repetitive peak reverse voltage V_{RRM} (V)	Max. RMS voltage V_{RMS} (V)	Max. DC blocking voltage V_R (V)	Max. forward voltage @1.5A, $T_A = 25°C$ V_F (V)	Max. reverse recovery time(1) T_{rr} (us)	Operating temperature T_J (°C)
GR1505	GR1505	50	35	50	1.10	2.5	-50 ~ +150
GR151	GR151	100	70	100			
GR152	GR152	200	140	200			
GR154	GR154	400	280	400			
GR156	GR156	600	420	600			
GR158	GR158	800	560	800			
GR1510	GR1510	1000	700	1000			

Note : 1. $I_F = 0.5A$, $I_R = 1.0A$, $I_{RR} = 0.25A$

Document ID : DS-11G09
Issued Date : 2010/05/05
Revised Date : 2012/05/31
Revision : C

■ Rating and characteristic curves

Fig.1 - Forward Current Derating Curve

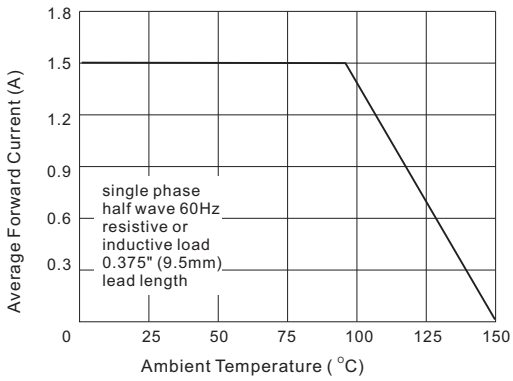


Fig. 2 - Maximum Non-Repetitive Peak Forward Surge Current

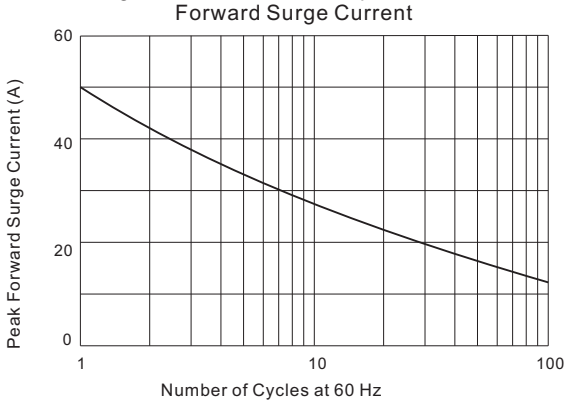


Fig. 3 - Typical Instantaneour Forward Characteristics

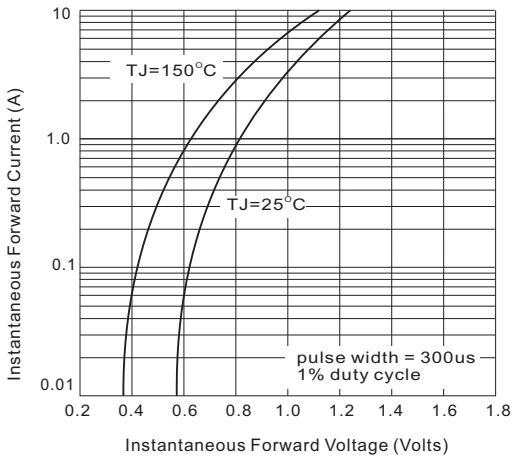


Fig. 4 - Typical Reverse Characteristics


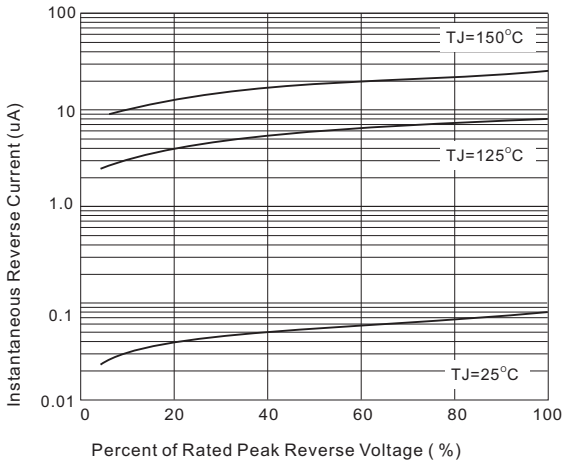


Fig. 5 - Typical Junction Capacitance

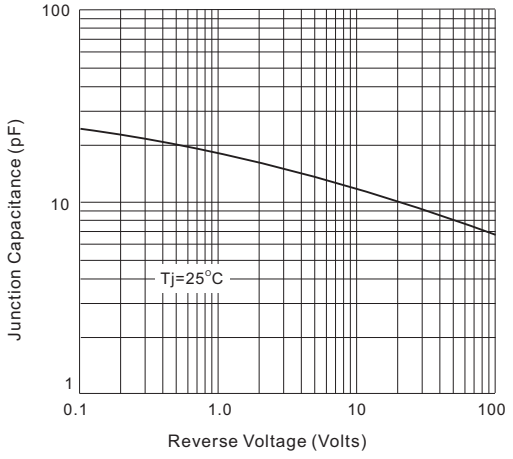

Document ID : DS-11G09
Issued Date : 2010/05/05
Revised Date : 2012/05/31
Revision : C

- CITC reserves the right to make changes to this document and its products and specifications at any time without notice.
- Customers should obtain and confirm the latest product information and specifications before final design, purchase or use.
- CITC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does CITC assume any liability for application assistance or customer product design.
- CITC does not warrant or accept any liability with products which are purchased or used for any unintended or unauthorized application.
- No license is granted by implication or otherwise under any intellectual property rights of CITC.
- CITC products are not authorized for use as critical components in life support devices or systems without express written approval of CITC.

http://www.citcorp.com.tw/ Tel:886-3-5600628 Fax:886-3-5600636

Add:Rm. 3, 2F., No.32, Taiyuan St., Zhubei City, Hsinchu County 302, Taiwan (R.O.C.)

Document ID : DS-11G09
Issued Date : 2010/05/05
Revised Date : 2012/05/31
Revision : C