

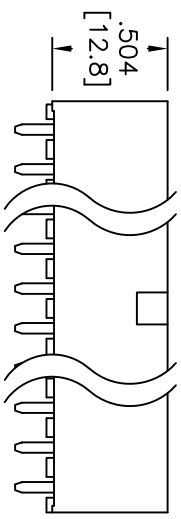
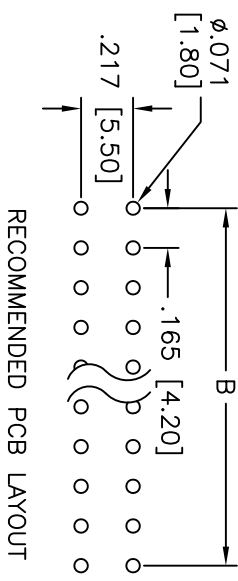


Rev	AWO #	Description	Date	Appr
-	7747	RELEASED	5/8/07	

APPROVED: _____
 DATE: _____ TITLE: _____

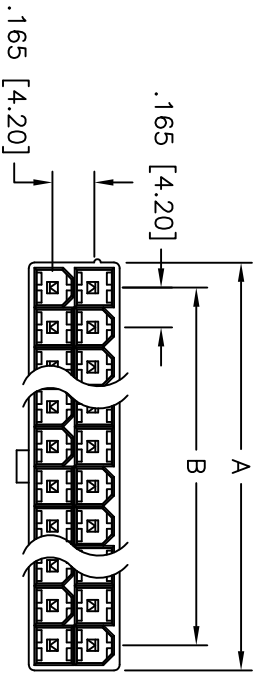

A = .165 [4.20] x No. of Spaces + .213 [5.40]
 B = .165 [4.20] x No. of Spaces

SPECIFICATIONS:

Material: Insulator: Nylon 6T, rated UL 94V-2
 Insulator color: Natural
 Contacts: Brass
 Plating: Matt Tin over Nickel underplate overall

Electrical: Operating voltage: 250 VAC max
 Current rating: 5 Amps max
 Insulation resistance: 1000 Mohms min @ 500 VDC
 Dielectric withstanding voltage: 1500 VAC for 1 minute
 Temperature Rating: Operating temperature: -40°C to +125°C

Environmental: Lead free, RoHS compliant.
 Recommended soldering temp: 260°C. for 5 sec.



ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: STRAIGHT HOUSING, MALE TERMINAL
 PCB MOUNT

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]		TOLERANCES: EXCEPT AS NOTED	
.X	± .10	ØX	± .10
.XX	± .020	ØXXX	± .015
.XXX	± .015	ØXXXX	± .010
APPROVALS	DATE		
DRAWN	BW	5/8/07	
CHECKED			
APPROVED			
SIZE	PART NO.	DMF-XX-S-MT-HT	REV.
X			-
REF:	SCALE:	NTS	SHEET 1 OF 2