

Description

GM6353 series is a group of positive voltage output, three-pin regulators, that provide a high current even when the input/output voltage differential is small. Low power consumption and high accuracy is achieved through CMOS and programmable fuse technologies, with the output voltage range from 1.5V to 6.0V

GM6353 consists of a high precision voltage reference, an error correction circuit, and a current limited output driver. Transient response to load variations has been improved in comparison to the existing series. The GM6353 incorporates both over temperature and over current protection.

Features

- ◆ Maximum output current up 450mA
- ◆ Output voltage from 1.5V to 6.0V in 0.1V increments
- ◆ Output voltage accuracy : $\pm 2\%$
- ◆ CMOS low power consumption, typically 15 μ A
- ◆ Input stability: typically 0.2%/V
- ◆ Ultra low dropout voltage, 0.1V @ $I_{OUT} = 100mA$

Application

Palmtops


Portable Cameras

Video Recorders

Battery Powered Equipment


Reference Voltage Sources

Typical Application Circuits

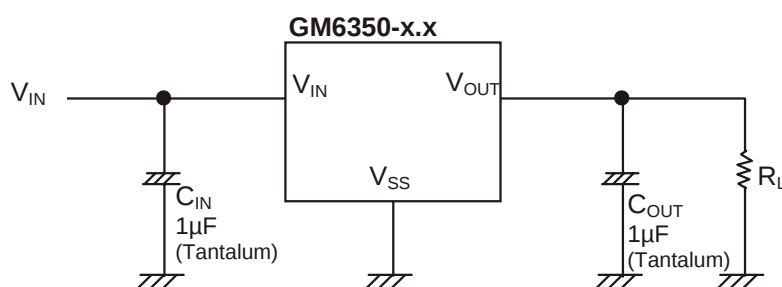

Marking Information and Pin Configurations (Top View)

SOT223



G: Green Product
 VV: Voltage suffix (18 = 1.8V, 50 = 5.0V...)
 A: Assembly / Test Site Code
 Y: Year
 WW: Week


Ordering Information

Ordering Number	Output Voltage	Package	Shipping
GM6353-1.5ST3RG	1.5V	SOT-223	2,500 Units/Tape and Reel
GM6353-1.8ST3RG	1.8V	SOT-223	2,500 Units/Tape and Reel
GM6353-2.5ST3RG	2.5V	SOT-223	2,500 Units/Tape and Reel
GM6353-3.3ST3RG	3.3V	SOT-223	3,000 Units/Tape and Reel
GM6353-5.0ST3RG	5.0V	SOT-223	3,000 Units/Tape and Reel

Absolute Maximum Ratings

PARAMETER		SYMBOL	RATINGS	UNITS
Input Voltage		V_{IN}	6.5	V
Output Current		I_{OUT}	450	mA
Output Voltage		V_{OUT}	$V_{SS} - 0.3$ to $V_{IN} + 0.3$	V
Thermal Resistance, Junction to Case	SOT-223	θ_{JA}	15	°C/W
Maximum Operating Junction Temperature		T_J	150	°C
Operating Ambient Temperature		T_A	- 40 to 125	°C
Storage Temperature		T_{stg}	- 65 to 150	°C
Lead Temperature (Soldering, 10 sec)			+ 260	°C

Block Diagram

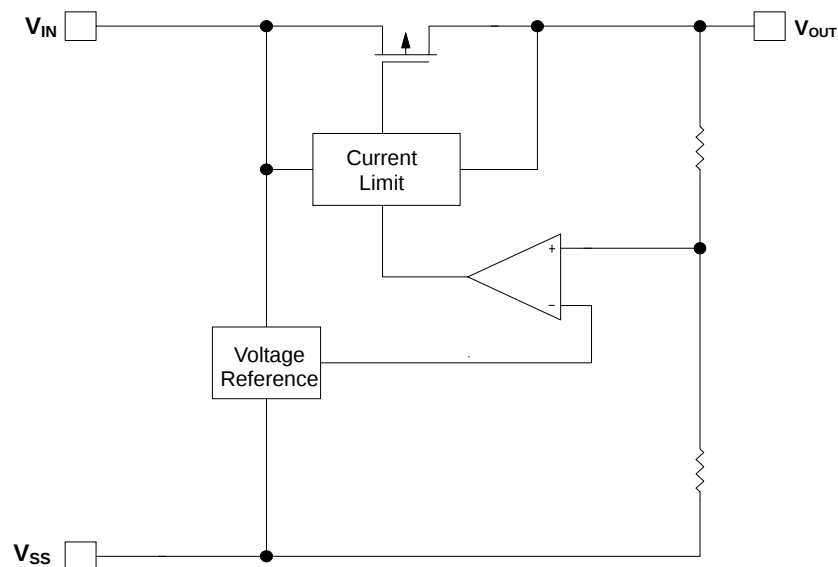

Electrical Characteristics ($T_A = 25^\circ\text{C}$, $V_{IN} = V_{OUT} + 0.5\text{V}$ unless otherwise noted)

Parameter		Symbol	Condition	Min	Typ	Max	Unit	
Output Voltage Accuracy		V _{OUT}	I _{OUT} = 1mA	-1.4		+1.4	%	
			I _{OUT} = 0.1mA to 300mA	-3.0		+2.0		
Line Regulation		ΔV _{OI}	I _{OUT} = 1mA, V _{OUT} + 0.1V < V _{IN} < 6.5V Fig. 1		0.1	0.3	%/V	
Load Regulation		ΔV _{OL}	V _{IN} = 6V, 0.1mA < I _{OUT} < 300mA C _{OUT} = 1μF, Fig. 2		0.005	0.04	%/mA	
Maximum Output Current			V _{IN} = 5V, V _{OUT} > 0.96 X V _{RATING}	300	500		mA	
Output Current Limit		I _{CL}		400			mA	
Ground Pin Current		I _{GND}	Fig. 3		15	30	μA	
Dropout Voltage	V _{OUT} > 2.5V	ΔV	I _{OUT} = 100mA		100	180	mV	
			I _{OUT} = 300mA		300	550		
	2.0V < V _{OUT} ≤ 2.5V		I _{OUT} = 100mA		150	300		
			I _{OUT} = 300mA		450	800		
	V _{OUT} ≤ 2.0V		I _{OUT} = 100mA		200	400		
			I _{OUT} = 300mA		600	1100		
Power Supply Rejection Ration		PSRR	10kHz		60		dB	

Note: Load Regulation is measured using pulse techniques with duty cycle < 5%

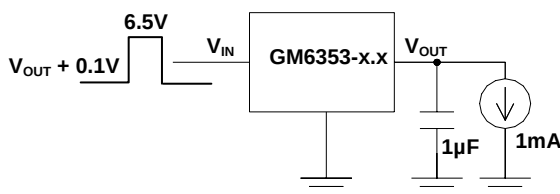


Figure 1. Line Regulation Test Circuit

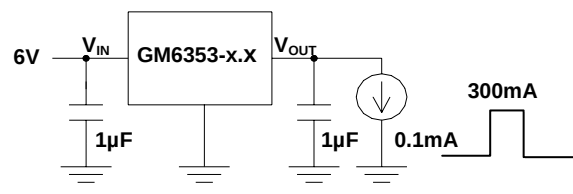


Figure 2. Load Regulation Test Circuit


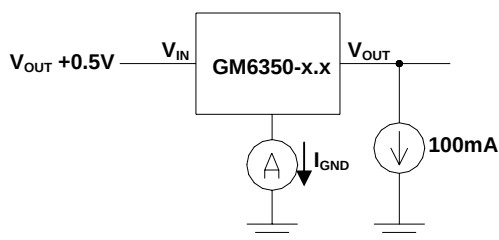


Figure 3. Ground Current Test Circuit

Package Outline Dimensions – SOT 223

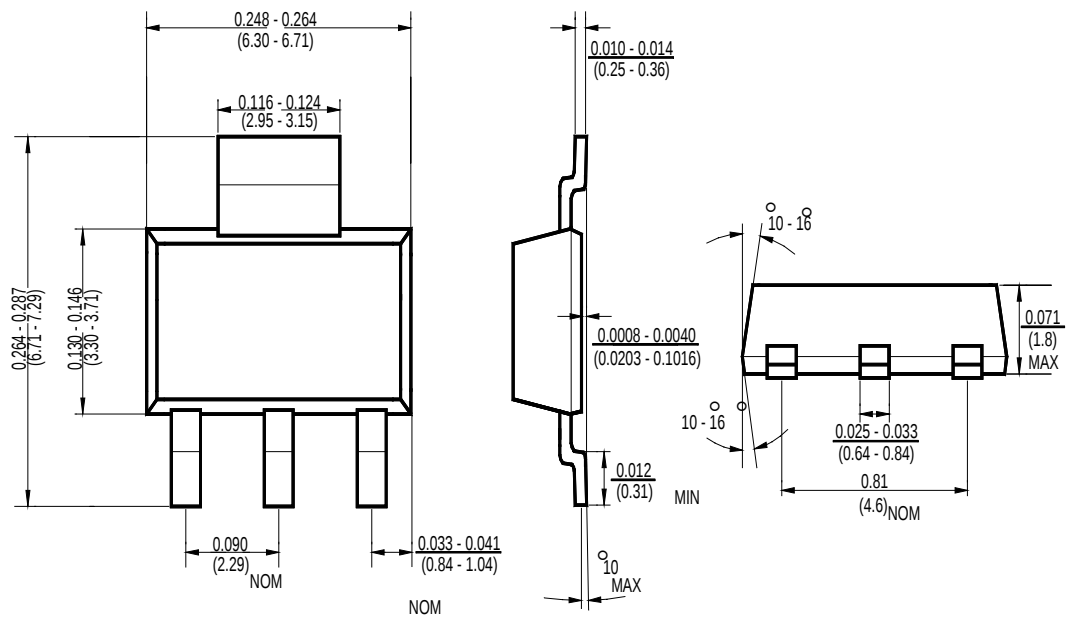

Ordering Number

GM 6353 - 1.5 ST3 R G

APM Gamma Micro	Circuit Type	Output Voltage	Package Type	Shipping Type	
		1.5 = 1.5V 2.5 = 2.5V 3.3 = 3.3V 5.0 = 5.0V	ST3: SOT223	R: Tape & Reel	Blank: Pb-free G:Green

Note:

Pb-free products:

- ◆ RoHS compliant and compatible with the current requirements of IPC/JEDEC J-STD-020.
- ◆ Suitable for use in SnPb or Pb-free soldering processes with 100% matte tin (Sn) plating.

Green products:

- ◆ Lead-free (RoHS compliant)
- ◆ Halogen free (Br or Cl does not exceed 900ppm by weight in homogeneous material and total of Br and Cl does not exceed 1500ppm by weight)