
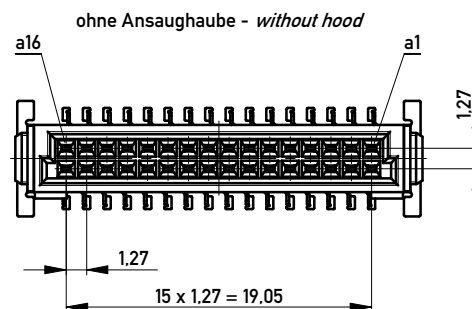
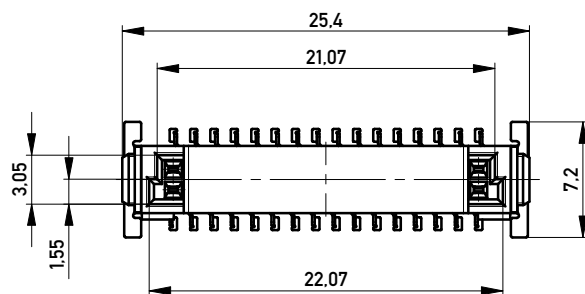

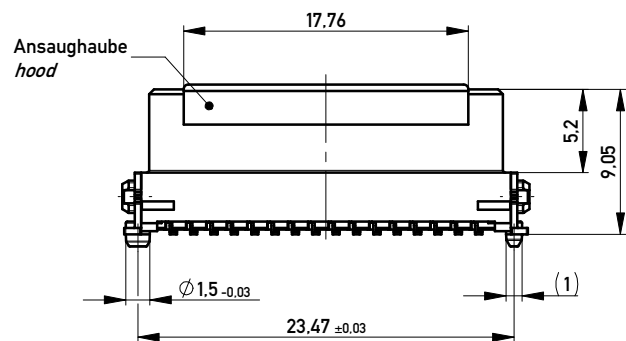


Leiterplatten-Layout Vorschlag für SMT
PCB-Layout Proposal for SMT

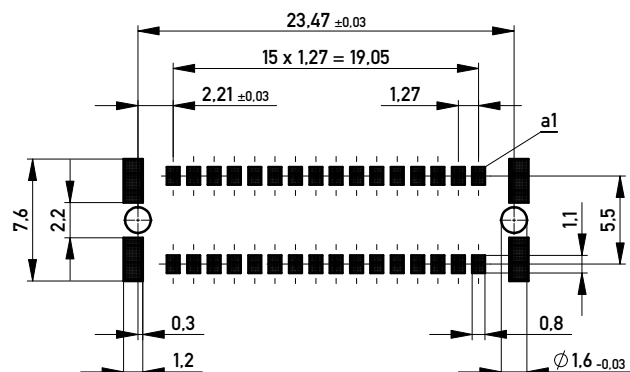


Anforderungsstufe 1
Performance Level 1

Kontaktbereich vergoldet
Mating Area gold plating


Anschlussbereich verzinkt 4-6 µm
Terminal Area 4-6 µm tin plating

Koplanarität der Anschlüsse ≤ 0,1 mm
Coplanarity Area of Termination ≤ 0,1 mm

Verpackt im Gurt nach DIN IEC 60286-3
Tape on Reel Packaging according to DIN IEC 60286-3
Verpackungseinheit: 280 Stück
Packaging unit: 280 pcs



Abspulrichtung - Reel off Direction

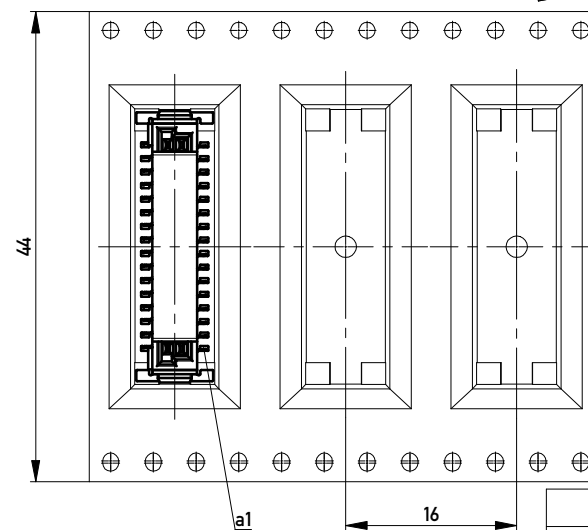

BA 7-03 - Standard Bauhöhe

type 7-03 - standard assembly height

Copyright by ERNI GmbH
Proprietary notice pursuant to ISO 16101 to be observed.

Information:				Tolerances		 All Dimensions in mm		Scale		3:1	
All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.				Subject to modification without prior notice. Drawing will not be updated.				Designation Federl. SMC-B 32-SMD-BA7-03 <i>Female SMC-B 32-SMD-type7-03</i>			
b		07.01.2014				www.ERNI.com		354064		I	
Index		Date								A3	
								Class		SMCB	

Copyright by ERNI GmbH
Proprietary notice pursuant to ISO 16758 to be observed.