

## VS-PP-R-3XRJ45/5-LSA


Order No.: 1653045



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1653045>

Patch panel, RJ45, DIN rail mounting, IP20, three slots, LSA connection, CAT5e, shielding over jumper can be selected

### Commercial data

GTIN (EAN)	 4 017918 970000
sales group	D552
Pack	1 pcs.
Customs tariff	85366990
Catalog page information	Page 198 (PC-2009)

<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

### Technical data

#### Mechanical characteristics

Number of positions	8
Number of slots	3
Insertion/withdrawal cycles	≥ 200
Type of connection	LSA-PLUS
Conductor cross-section	0.14 mm <sup>2</sup> ... 0.34 mm <sup>2</sup> (solid)
Connection cross-section AWG	26 ... 22 (solid)
External cable diameter	5 mm ... 8.5 mm
Color	green
Ambient temperature (operation)	0 °C ... 70 °C

**Material data**

Inflammability class acc. to UL 94	V0
Housing material	PC
Contact carrier material	PBT
Contact material	Copper alloy
Contact surface material	Gold over nickel
Degree of protection	IP20

**Electrical characteristics**

Number of positions	8
Transmission characteristics (category)	CAT5 (IEC 11801:2002), CAT5e (TIA 568B:2001)
Rated current	1 A

**Accessories**


Item	Designation	Description
<b>General</b>		
2765505	CT-WZ/A	Split-core tool for connecting cables to LSA-Plus strips

**Tools**

1657407	VS-CABLE-STRIP-VARIO	Stripping tool, for the multi-level stripping of shielded cables
---------	----------------------	--

**Diagrams/Drawings**

Dimensioned drawing

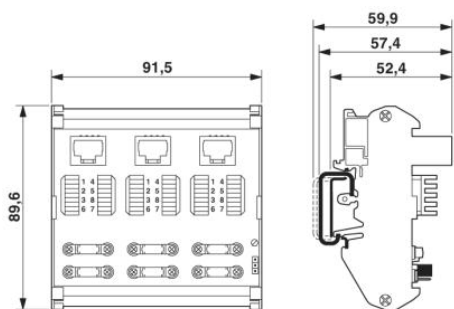

Patch panel with three RJ45 connections

**Address**

PHOENIX CONTACT Deutschland GmbH  
Flachmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 12000  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.de>



© 2011 Phoenix Contact  
Technical modifications reserved;