




LOC	DIST	REVISIONS					
GP	00	P	LTR	DESCRIPTION	DATE	OWN	APVD
			H3	REVISED PER ECO-11-005033	23MAR11	RK	HMR

D

C

B

A

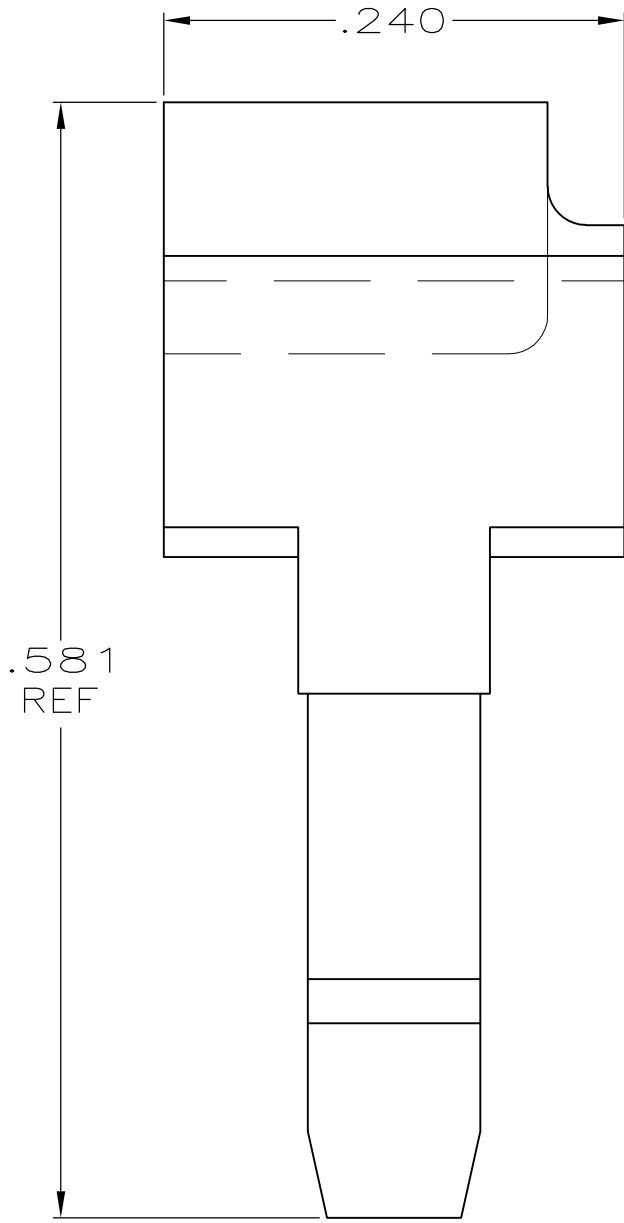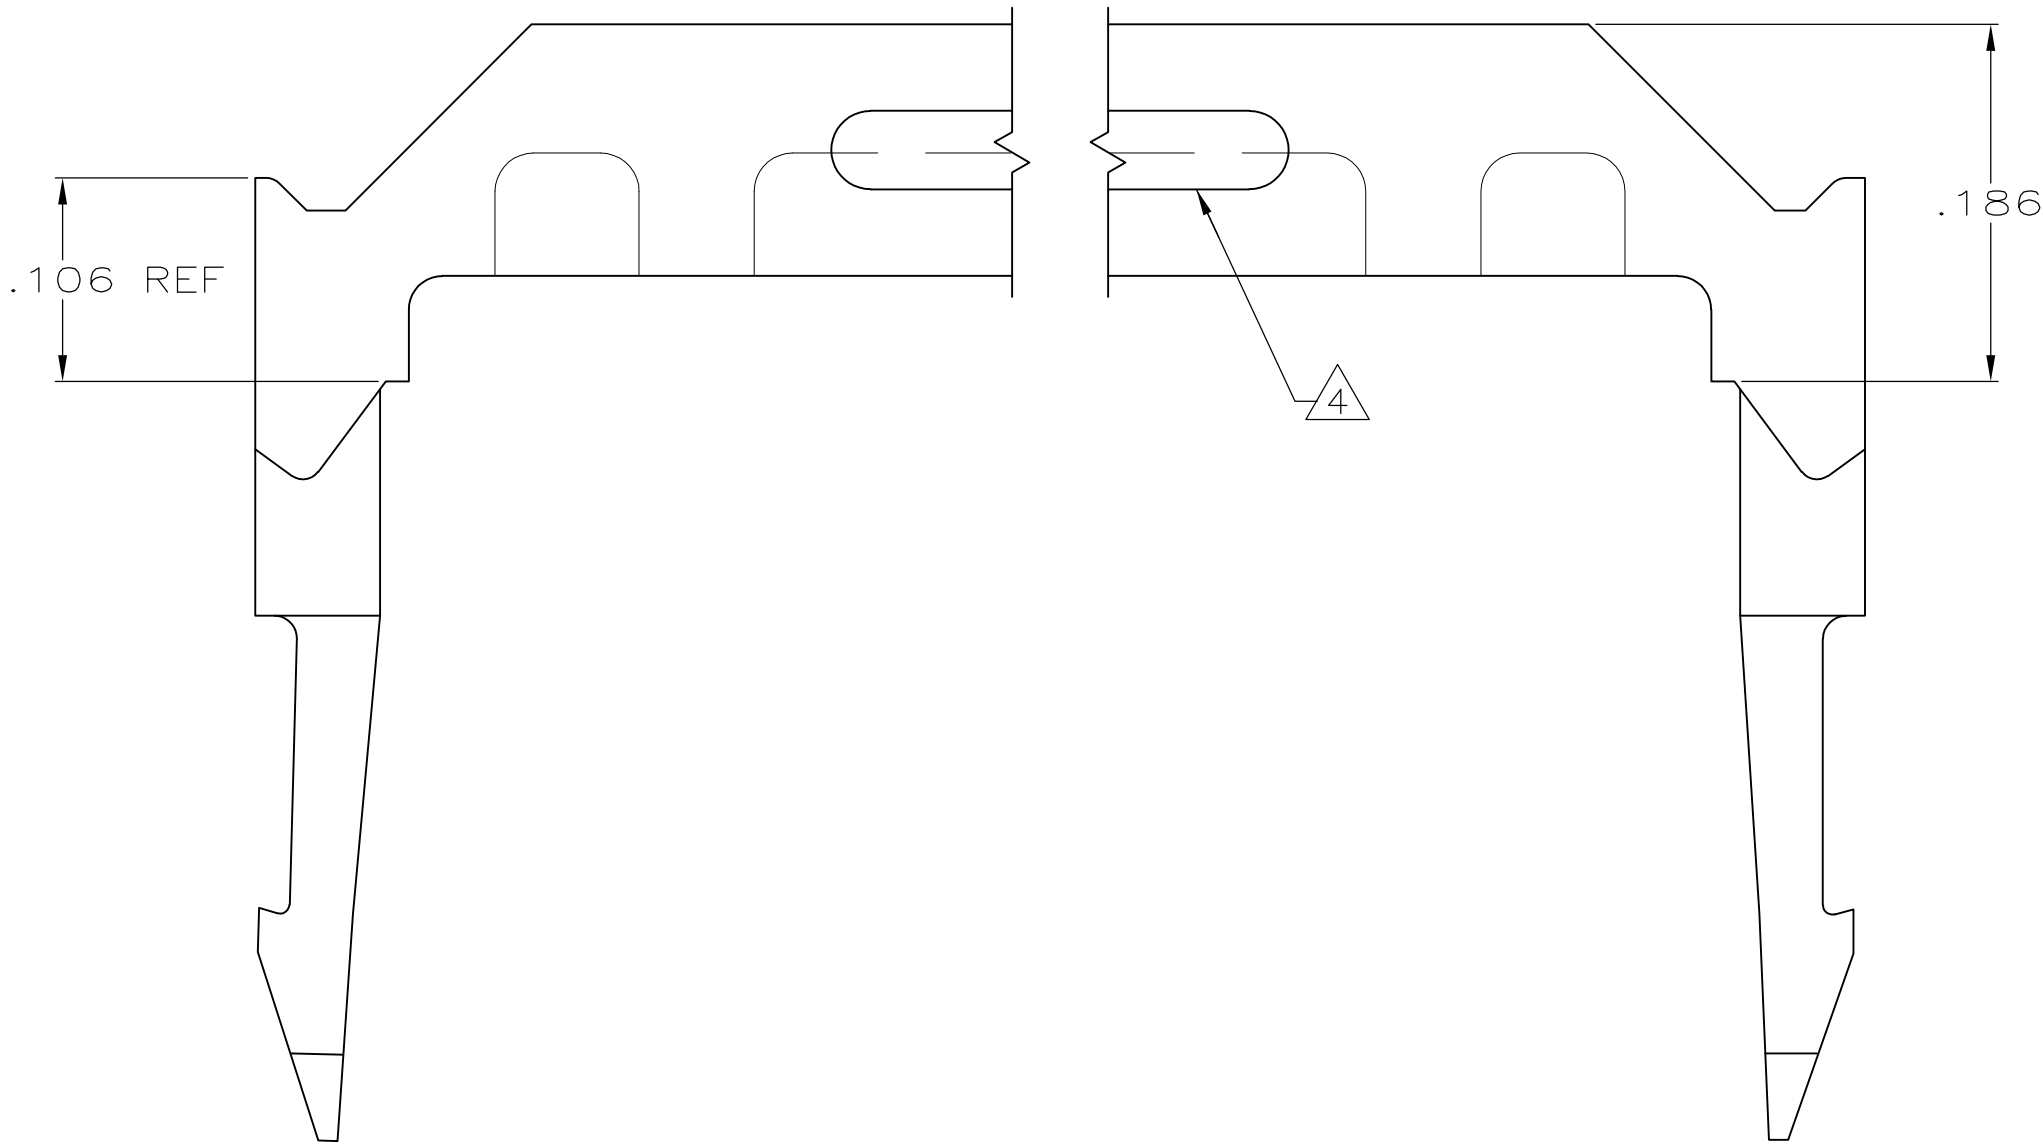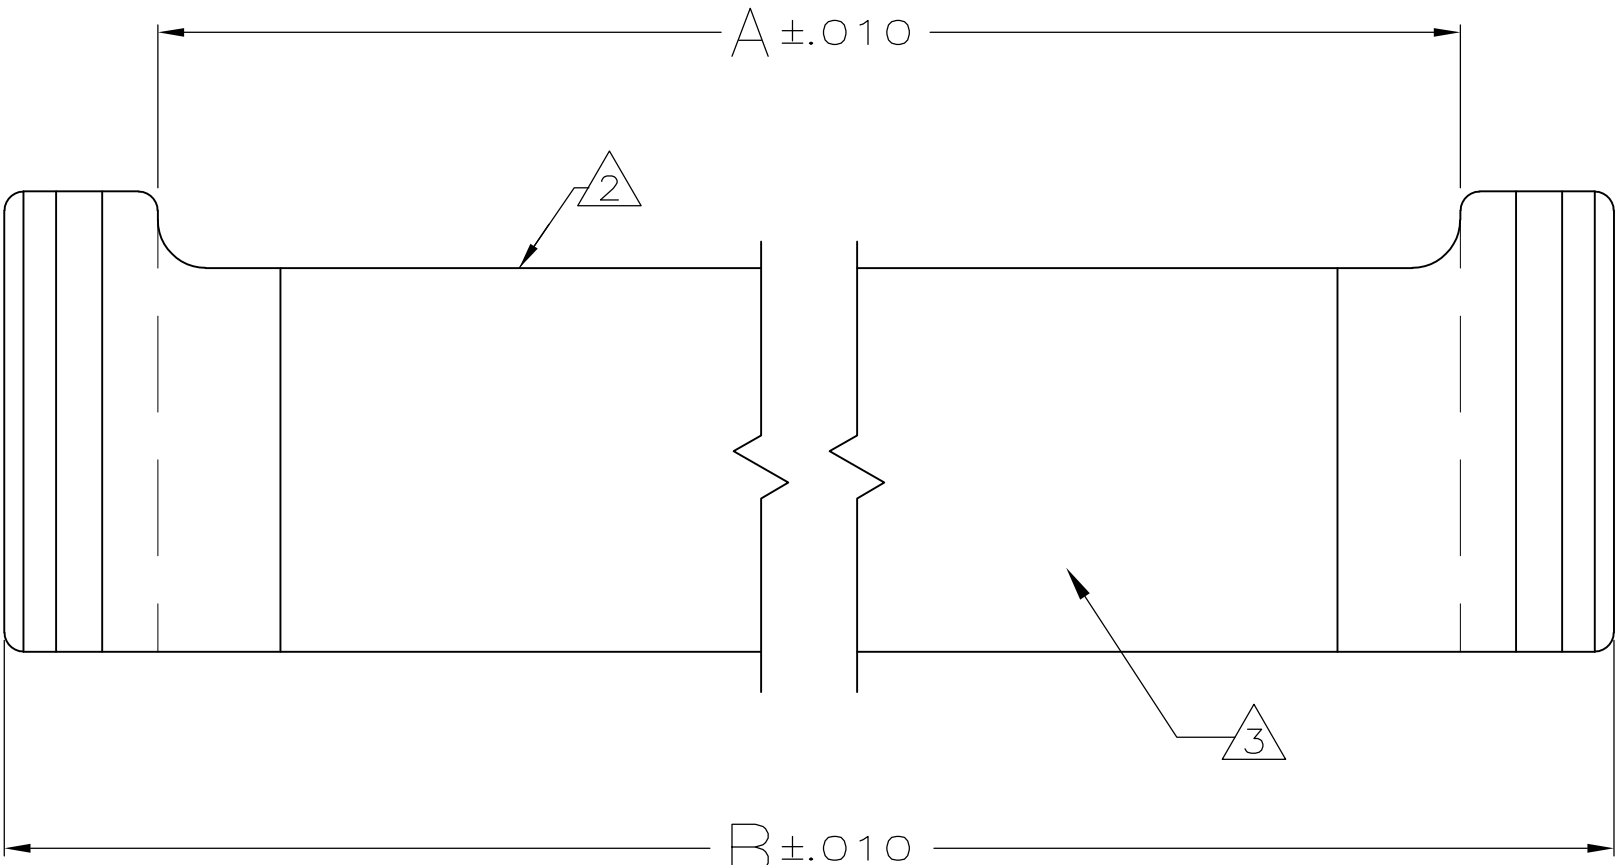

- 1 MATERIAL: FLAME RETARDANT THERMOPLASTIC, COLOR: BLACK.
- 2 AMP TRADEMARK, MOLD CAVITY LETTER, AND MANUFACTURING ORIGIN (OPTIONAL) TO BE MOLDED ON THIS SURFACE.
- 3 ALTERNATE LOCATION FOR AMP TRADEMARK AND CAVITY ID.
- 4 CORING SLOTS IN BOTH SIDES AS INDICATED, OR IN UNDERSIDE OF PART.

1.990	1.834	36	1-499252-5
1.290	1.134	22	1-499252-4
3.390	3.234	64	1-499252-3
1.690	1.534	30	1-499252-2
2.390	2.234	44	1-499252-1
1.390	1.234	24	1-499252-0
.890	.734	14	499252-9
.990	.834	16	499252-8
3.190	3.034	60	499252-7
1.890	1.734	34	499252-6
.690	.534	10	499252-5
2.690	2.534	50	499252-4
1.490	1.334	26	499252-3
1.190	1.034	20	499252-2
2.190	2.034	40	499252-1
B	A	NO OF POSN	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J GALLUCCI BG CHK H.MOLL		2-23-90 3-5-90		 TE Connectivity						
DIMENSIONS: INCHES		TOLERANCES, UNLESS OTHERWISE SPECIFIED:		APVD —		NAME						
		0 PLC ± —		PRODUCT SPEC		STRAIN RELIEF, RECEPTACLE CONNECTOR, FLAT CABLE, AMP—LATCH —						
		1 PLC ± —		—								
		2 PLC ± —		APPLICATION SPEC								
		3 PLC ± .005		—								
4 PLC ± —		ANGLES ± —		WEIGHT —		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO			
MATERIAL 		FINISH		A2		00779		C=499252		—		
CUSTOMER DRAWING						SCALE	15:1		SHEET	1 of 1	REV	H3