

Surface Mount Quadrature Hybrid

20 - 40 MHz

JHS-114

V2.00

Features

- Fully Hermetic Package
- Octave Bandwidth
- 3° Maximum Phase Deviation from 90°
- Low Loss - 0.5 dB Maximum

Guaranteed Specifications*

(From -55°C to +85°C)

Frequency Range	20-40 MHz
Insertion Loss (Less coupling)	0.5 dB Max **
Isolation	20 dB Min
Amplitude Balance	0.75 dB Max
VSWR	1.2:1 Max
Deviation from Quadrature	3° Max

Operating Characteristics

Impedance	50 Ohms Nominal
Input Power	5 Watts Max @ 25°C Derated to 1 Watt @ 100°C

Typical Phase Linearity 3° from Straight Line

Environmental
MIL-STD-883 screening available.

Pin Configuration
JHS-114 A; P1, B; P2, C; P4, D; P3
All other pins are ground

*All specifications apply with 50 ohm source and load impedance.

**Average of coupled outputs less 3dB.

This product contains elements protected by United States Patent Number 3.484.724

Phasing Diagram

IN \ OUT	A	B	C	D
A	ISO	0°	-90°	
B	ISO	-90°	0°	
C	0°	-90°	ISO	
D	-90°	0°	ISO	

Ordering information


Model No.	Package
JHS-114 PIN	Surface Mount

Specifications Subject to Change Without Notice.

M/A-COM, Inc.

North America: Tel. (800) 366-2266 Fax (800) 618-8883 ■ Asia/Pacific: Tel. +81 (03) 3226-1671 Fax +81 (03) 3226-1451 ■ Europe: Tel. +44 (1344) 869 595 Fax +44 (1344) 300 020

SF-1



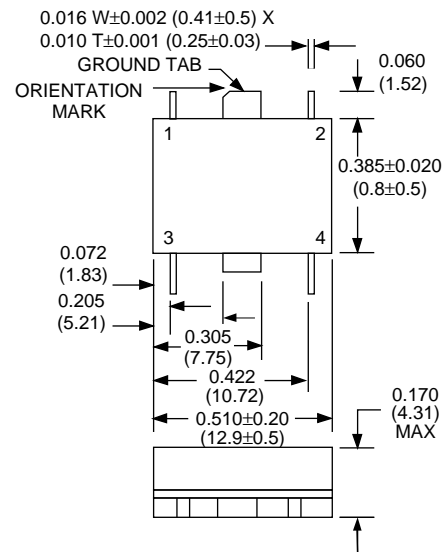


WEIGHT (APPROX.): 0.07 OUNCES 2 GRAMS


Dimensions in () are in mm.

Unless Otherwise Noted: .xxx = ± 0.010 (.xx = ± 0.25)
.xx = ± 0.02 (.x = ± 0.5)

Typical Performance

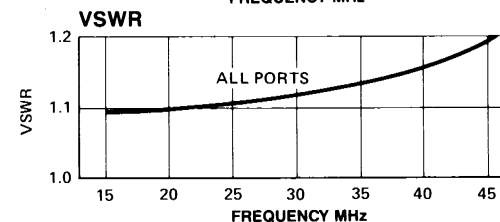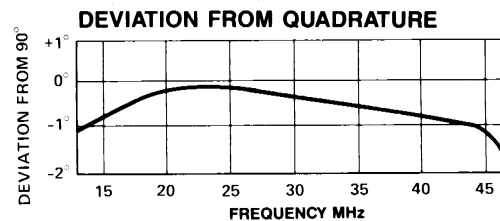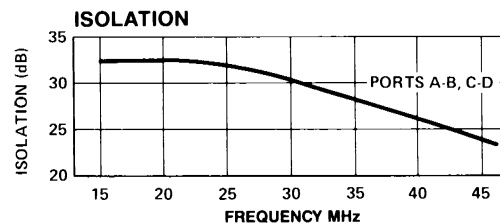

Typical Performance (cont'd)

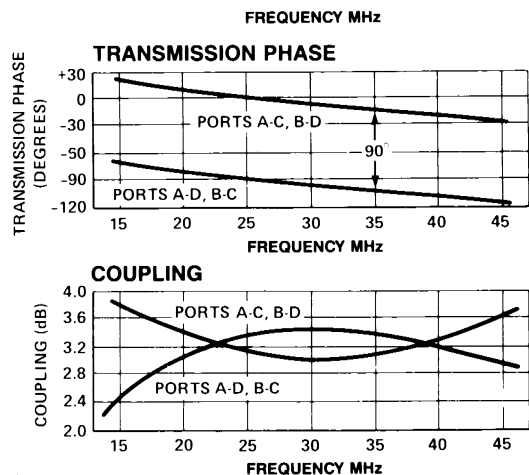

Specifications Subject to Change Without Notice.