


Kinghelm®

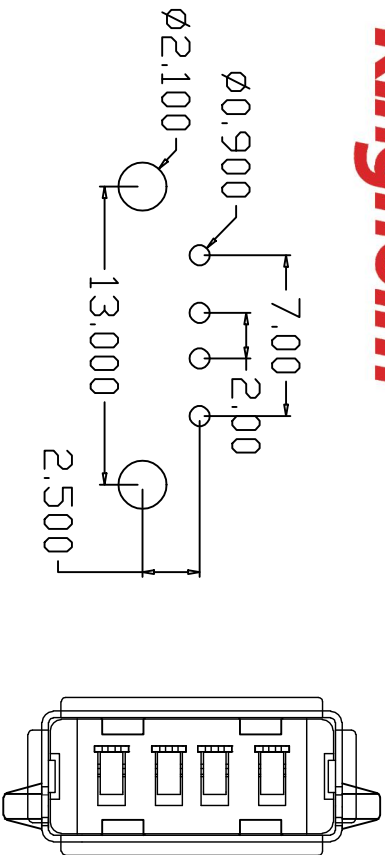

规格说明: Specifications:

- 1. 额定电流: Current Rating
1.5A/contact terminal
- 2. 额定电压: Voltage Rating
30V DC
- 3. 接触电阻: Contact Resistance
30 milliohms MAX
- 4. 耐电压: Dielectric Withstanding Voltage:
500 V AC AT Sea Level
- 5. 绝缘电阻: Insulation Resistance:
1000MEGA ohms MIN

物理性能: Mechanical:


- 1. 插拔力: Connector Mate and Unmate Force
Mate force: 3.57kgf(MAX)
Unmate force: 1.02kgf(MIN)
- 2. 端子保持力: Terminal Retention
1.0kgf(MIN)

- 1. 塑胶: Housing:
Hing Temperature Thermoplastics,
- 2. 端子: Contact: Copper Alloy C2680
- 3. 外壳: Shell: Copper Alloy C2680/SPCC

1. 端子: Contact: Plated Gold in Mating Area;
Tin On Solder Talls
端子四周镀50U”(MIN) 锡, 镀金区域镀100—200U”镀金1U”

铜壳四周镀80U”(MIN) 锡

Nickel Plating

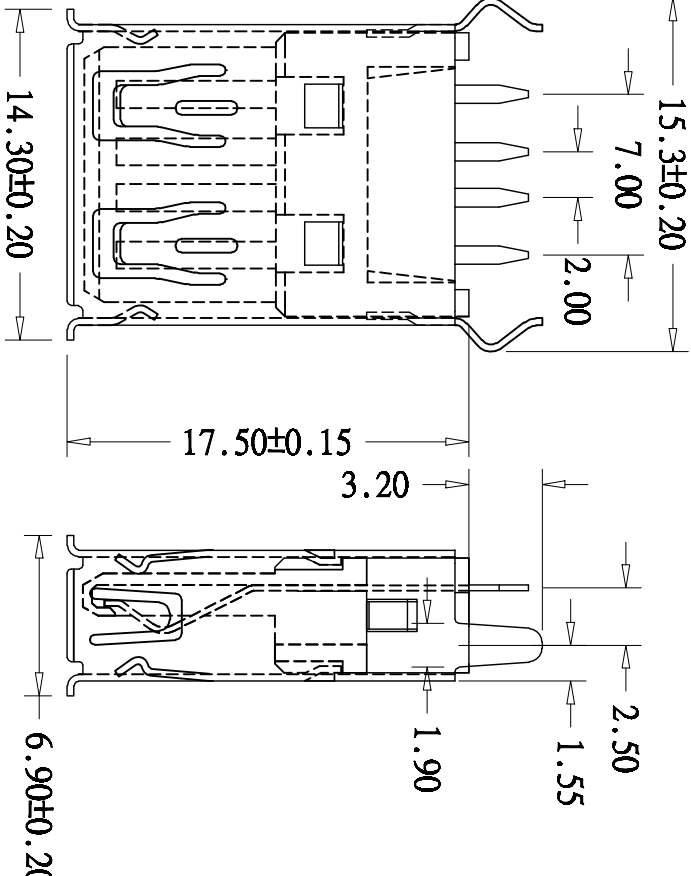

成品图 MANUFACTURE DWG		深圳市金航标电子有限公司		MMW.BDS666.COM	
公差一覽表 TOLERANCE UNLESS OTHERWISE		KH-AF180WJ-17.5-JB		0755-83044319	
.X±0.15	X±5°	日期 DATE	單位 UNIT	圖號 DRAWING	DWG NO.
XX±0.05	.X±2°	審核 CHECKED	比例 SCALE	設計 DESIGN	品名 NAME
XXX±0.02	.XX±1°	核准 APPROVE	角法 VIEW		版本 VER
				圖框 SHEET	頁數 SHEET