


DRAWING NOT TO SCALE  
FOR REFERENCE ONLY

THE INFORMATION CONTAINED HEREIN IS THE EXCLUSIVE PROPERTY OF VIRGINIA PANEL CORPORATION AND IS SUBMITTED FOR USE BY THE CUSTOMER ONLY. THE DATA SHALL NOT BE DUPLICATED, USED OR DISCLOSED IN WHOLE OR IN PART FOR ANY PURPOSE OTHER THAN TO MAINTAIN THE EQUIPMENT PROVIDED. CONSULT WITH VIRGINIA PANEL CORPORATION ENGINEERING IF MORE DETAIL IS REQUIRED.



5. Maximum Operating Current = 1.3 Amps

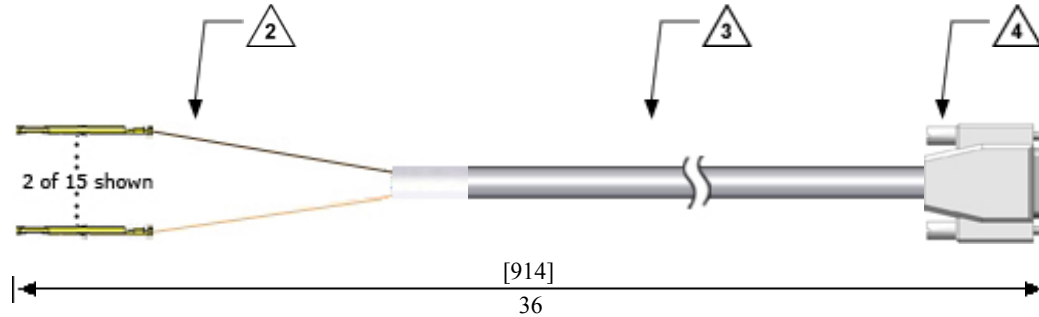

D-SUB - 15-PIN FEMALE



15 CONDUCTOR SHIELDED - 4" WIRE BREAKOUT



610138216 - SIGNAL, RECEIVER, QUADRAPADDLE, 5 AMP, 22-28 AWG

1. FOR APPLICATION USE AND CARE INFORMATION CONSULT VPC USERS MANUAL @ WWW.VPC.COM

NOTES:

DIMENSIONS ARE SHOWN AS  
[MILLIMETERS]  
INCHES

CUSTOMER DRAWING		
VIRGINIA PANEL CORPORATION WWW.VPC.COM		
Signal Patchcord, Receiver, QuadraPaddle, 36", 15 Conductor Shielded, to 15-Pin Female D-Sub, (1.3 Amps)		
SIZE	CAGE CODE	PART# 7-124875642-036
A	18117	
SCALE: NONE	DATE: 01/01/2018	SHEET 1 OF 1