


Fast recovery high voltage diodes

Reverse Voltage – 20KV-30KV

Forward Current –100mA

FEATURES

- ◆ Supersmall size
- ◆ High reliability
- ◆ High speed switching

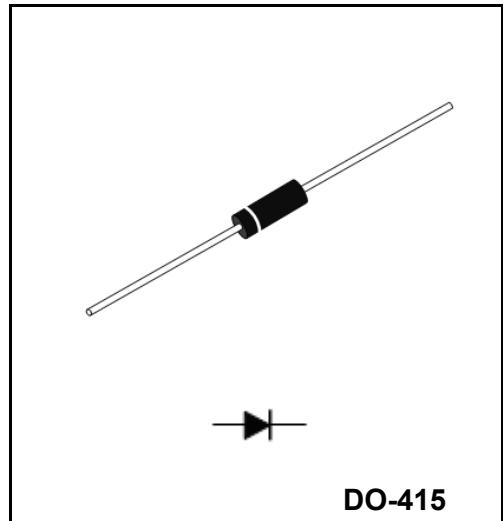

DO-415


MECHANICAL DATA

- ◆ Case: Molded Plastic Body
- ◆ Epoxy meets UL 94V-0 flammability rating
- ◆ Terminals: Pure tin plated leads, solderable per J-STD-002 and JESD22-B102, E3 suffix for consumer grade, meet JESD201 class 1A whisker test.
- ◆ Polarity: Color band denotes cathode end

Maximum rating (Ta=25°C unless otherwise noted)

Parameter	Symbol	2CL2FM	2CL2FP	Unit
Repetitive peak reverse voltage	V _{RRM}	20	30	kV
Average forward current	I _{F(AV)}	100		mA
Surge(Non-repetitive)forward current	I _{FSM}	10		A
Peak forward voltage I _{FM} =100mA	V _{FM}	35	46	V
Peak reverse current V _{RM} =V _{RRM}	I _{RRM}	2 50		μA
Reverse recovery time I _F =10mA, I _{RM} =20mA	T _{rr}	0.1		μs
Operating ambient temperature	T _a	-40 ~ +125		°C
Storage Temperature Range	T _{stg}	-40 ~ +125		°C
Virtual junction temperature	T _(vj)	125		°C

Package outline dimensions

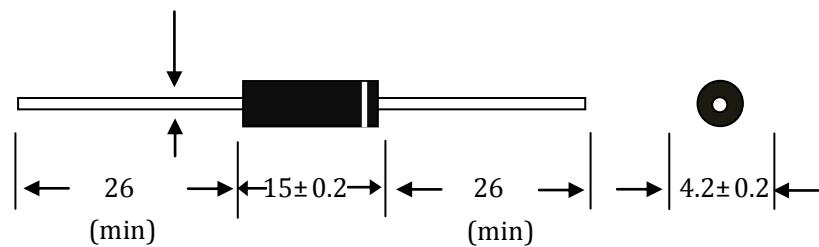Lead Diameter 0.8 ± 0.03 

Summary of Packing Options

Package	Packing Description	Packing Quantity	Industry Standard
DO-415	BOX	5000	EIA-481-1