

RUGGED GALAXY™ SERIES PURE-SINEWAVE DC-AC INVERTERS

Input: 105-150 VDC

Output: 120V or 220V 1Ø
50, 60, or 400 Hz

Power: 120 VA - 35+ KVA



APPLICATIONS

Utilizing field proven technology, this family of rugged pure sinewave DC-AC Inverters is suitable for harsh environments and can be customized for unique applications including:

- ☐ Shelters
- ☐ Tactical Systems
- ☐ Ground support
- ☐ MIL-STD-810
- ☐ Utility Applications
- ☐ Mobile Systems
- ☐ MIL-STD-167
- ☐ MIL-STD-461



NOVA ELECTRIC

www.novaelectric.com

novasales@theallpower.com

AS 9100

BUREAU VERITAS
Certification
Certificate No: U5006267-1



A Leader in DC-AC Inverter Technology since 1966 - 120VA to 35+KVA

MADE IN USA

CAN MEET MIL-STD-810, MIL-STD-1399, MIL-S-901, MIL-STD-704, & MIL-STD-461 OPTIONALLY

APPLICATIONS	SPECIFICATIONS
--------------	----------------

The transformer isolated Galaxy Series Inverters are extremely rugged by design, and feature an optional advanced Internal Suppression Filter Network (ISFN) to suppress the significant transients usually associated with electric utility and military applications. The units are also extremely reliable, designed to provide many years of service in harsh shock, vibration, humidity, and EMI environments.

HIGH-RELIABILITY

MTBF: 100,000 Hours

MTBR: 30 Minutes (assuming qualified tech)

STANDARD INDICATORS

- Output Volt & Amp Meters
- Input Power On Lamp

ELECTRICAL

Input: 105 - 150VDC

Output: specify 120 or 220VAC 1Ø

(Three-Phase Output Optional)

Frequency: Specify 50, 60, or 400Hz

Voltage Regulation: $\pm 2\%$ NL to FL

Frequency Regulation: $\pm 0.5\%$ NL to FL

Harmonic Distortion: 5% THD

Power Factor: 0.7 lead to 0.7 lag

Efficiency at full load: 75-88% typical

Overload: 125% for 5 minutes

PROTECTIVE FEATURES

Current Limit, Short Circuit Protection,

Thermal Protection, Semiconductor

Protection, and (Optional) ISFN

ENVIRONMENTAL

Operating Temp.: -20° to +50°C (extended range optional)

Storage Temp. Range: -40° to +71°C

Humidity: to 95% non-condensing

Elevation: 15,000 Ft. (4,572m) operating;
40,000 ft. (12,192m) non-operating

Shock: 20g for 11mS half sinewave

Audible Noise: Less than 55 dbA at 5 ft.


OPTIONS

- Ruggedization against shock, vibration and humidity
- Additional Meters
- Input Transient Filter (ISFN)
- Static Transfer Switch

PARTIAL MODEL SELECTION

60 HZ MODELS	OUTPUT VAC	OUTPUT FREQ(HZ)	CONTINUOUS OUPUT POWER	APPROX. WEIGHT(LB)	SIZE (HxWxL) INCHES
GH 50 60-120	120	60	500VA	95	24"x20.75"x7.15"
GH1K60-120	120	60	1KVA	95	24"x20.75"x7.15"
GH2K60-120	120	60	2KVA	120	30"x24"x8"
GH3K60-120	120	60	3KVA	130	30"x24"x12"
GH5K 60-120	120	60	5KVA	140	30"x24"x12"
GH6K 60-120	120	60	6KVA	150	30"x24"x12"
GH7.5K60-120	120	60	7.5KVA	175	36"x24"x16"
GH10K60-120	120	60	10 KVA	260	36"x24"x16"
GH15K60-120	120	60	15 KVA	350	42"x30"x21.20"
GH20K60-120	120	60	20 KVA	C/F	42"x30"x21.20"
GH25K60-120	120	60	25KVA	C/F	54"x36"x16"
GH30K60-120	120	60	30KVA	C/F	54"x36"x16"
GH35K60-120	120	60	35KVA	C/F	54"x36"x16"

Typical 3-6KVA chassis

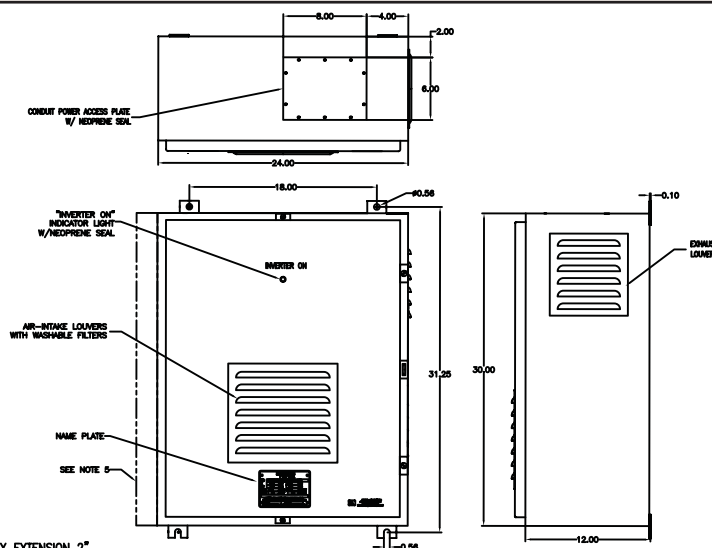

NOTES:

1. INVERTER CABINET HAS (4) MTG EARS.
2. FINISH: ANSI #61 GRAY, SEMI-GLOSS.
3. ENCLOSURE TYPE: NEMA 12, P/N SCE-302410LP
4. CERTAIN APPLICATIONS REQUIRE EXTERNAL HEATSINK ON LEFT SIDE - MAX EXTENSION 2"