

C76 I/O INTERFACE SYSTEM

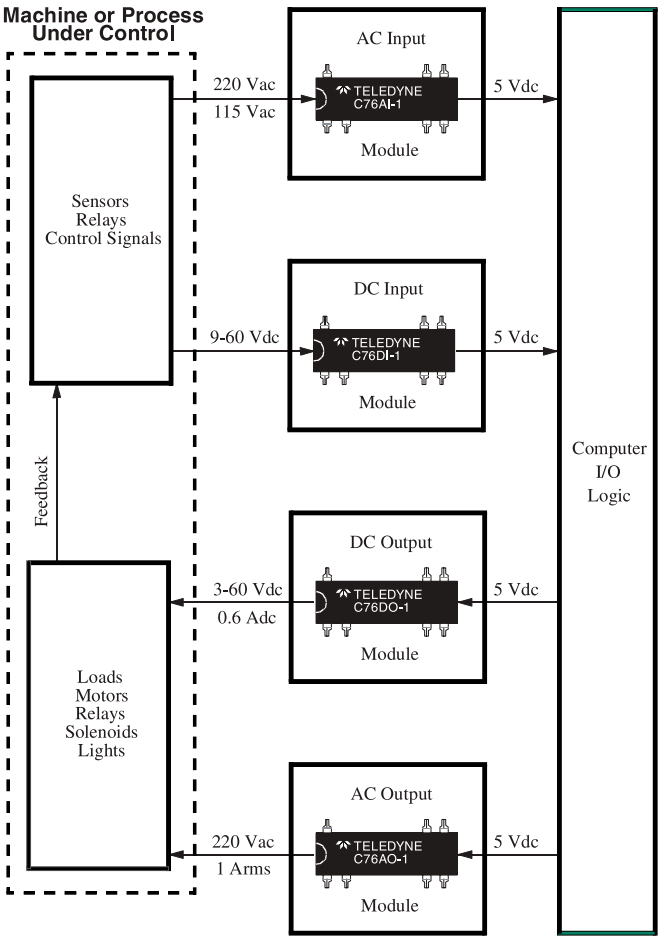



Part Number	Type	Characteristics
C76AO-1	AC Output	3.8 to 16 Vdc Input 5 to 250 Vrms, 1 A Output
C76AI-1	AC Input	90 to 250 Vrms Input 0 to 60 Vdc, 100 mA Output
C76DO-1	DC Output	3.8 to 16 Vdc Input 3 to 60 Vdc, 0.6 A Output
C76DI-1	DC Input	9 to 60 Vdc Input 0 to 60 Vdc, 100 mA Output

APPLICATIONS
- Robotics
- Programmable Controllers
- Process Control
- Machine Tool Control
- Energy Management
- Automatic Test Equipment

FEATURES/BENEFITS
- Input Enable Function: For computer timing function control.
- Floating Outputs: Eliminates ground loops and signal noise. Protects computer I/O and logic circuits
- Low Off-State Leakage: High off-state impedance
- Switches/Controls High Voltages: To 250 Vrms Switches/Controls High Currents: To 1.0 Arms
- High Noise Immunity: Control signals isolated from switching noise
- High Dielectric Strength: Safety and protection of control and signal level circuits


DESCRIPTION
The Series C76 solid-state computer input/output modules are designed expressly for application in computerized control systems where reliable noise-free interface of switching is required to isolate computer logic elements from high conducted noise encountered in industrial environments. Sensitive logic circuitry is kept noise-free by means of optical isolation between logic and power lines.

Output modules allow either TTL or CMOS level signals to control the switching of power to high voltage and high current loads. Hysteresis at the input significantly increases the noise margin when used in the CMOS input mode, preventing false triggering in noisy environments

Input modules convert the presence or absence of load level voltages from pressure, flow, temperature and other transducers, limit switches, solenoids or relays to “clean” low level logic signals for computer input. An ENABLE function maintains the module’s output in an “open” state until the ENABLE terminal is brought up to the bias supply level.


SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE © 2002 TELEDYNE RELAYS


PIN CONFIGURATIONS




C76AO-1

MECHANICAL SPECIFICATION

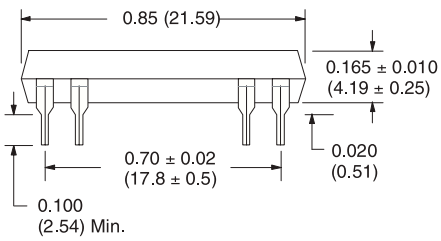





DIMENSIONS ARE SHOWN IN INCHES (MILLIMETERS)
Tolerances (unless otherwise specified) ± 0.015 (0.38)



C76DO-1




Operating Temperature Range: -40˚C to 85˚C
Storage Temperature Range: -40˚C to 100˚C
Weight: 2.0 gm. maximum
Case: Special 16 pin dual In line, filled epoxy.



C76AI-1

TRUTH TABLE FOR ENABLE FUNCTION

V_{IN} [1]	ENABLE [2]	OUTPUT [3]
0	0	0
1	0	0
0	1	0
1	1	1



C76DI-1

(TOP VIEW)

1. For C76AI-1:
   When using 115 Vrms input, V_{IN} is a “1” when the voltage is ≥ 90 Vrms
   When using 220 Vrms input, V_{IN} is a “1” when the voltage is ≥ 180 Vrms

2. For C76AI-1 and C76DI-1:
   The Enable input is a “1” when the Enable voltage V_E is ≥ 2.0 Vdc.
   The Enable input is a “0” when the Enable voltage V_E is ≤ 0.4 Vdc.

3. A “0” represents an open output switch.
   A “1” represents a closed output switch.

NOTE:

When used in the CMOS input configuration, the C76AO-1 and the C76DO-1 provide inversion. When the input voltage is 0.5 Vdc or less the output will be guaranteed “On”. When the input voltage is 2.8 Vdc or more the output will be guaranteed “Off”.

© 2002 TELEDYNE RELAYS

ELECTRICAL SPECIFICATIONS
(25˚C UNLESS OTHERWISE SPECIFIED)

TTL INPUT (BIAS) SPECIFICATIONS (See Figure 4)


Parameter	Min	Max	Units
Bias Voltage Range (See Fig. 1)	3.8	16.0	Vdc
Bias Current @ 5 Vdc		16.0	mA
Must Turn-On Voltage	3.8		Vdc
Must Turn-Off Voltage		1.5	Vdc
Reverse Voltage Protection		-32.0	Vdc

CMOS INPUT (CONTROL) SPECIFICATIONS (See Figure 4)


Parameter	Min	Max	Units
Control Voltage Range		16.0	Vdc
Control Current at 5 Vdc		250	Adc
Must Turn-On Voltage	0.5		Vdc
Must Turn-Off Voltage		2.8	Vdc
Bias Voltage Range	3.8	16	Vdc

OUTPUT (LOAD) SPECIFICATIONS


Parameter	Min	Max	Units
Load Voltage Range	5.0	250	Vrms
Output Current Rating (See Fig. 2)	0.01	1.0	Arms
Frequency Range	40	80	Hz
Over Voltage Rating (25°C)		±500	Vpeak
On-State Voltage Drop @ 1 Arms		1.5	Vrms
Zero Voltage Turn-On		±17.0	Vpeak
Surge Current Rating (See Fig. 3)16 msec, 25°C		8.0	Apeak
Turn-On Time		1/2	Cycle
Turn-Off Time		1	Cycle
Leakage Current (Off-State) @ 230 Vrms		1.0	mA
Off-State dV/dt w/o Snubber	200		V/µs
Isolation (Input to Output)	10^9		Ohms
Dielectric Strength (Input to Output)	3750		Vac
Capacitance (Input to Output)		5.0	pF
Junction Temperature (T_J)		150	˚C

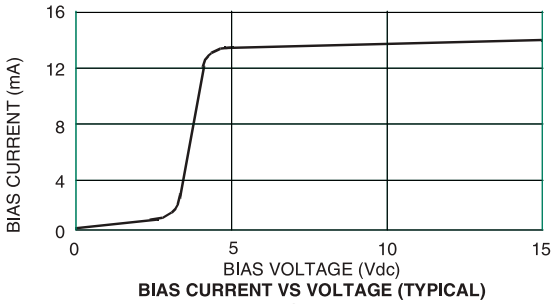

BIAS CURRENT VS VOLTAGE (TYPICAL)
FIGURE 1

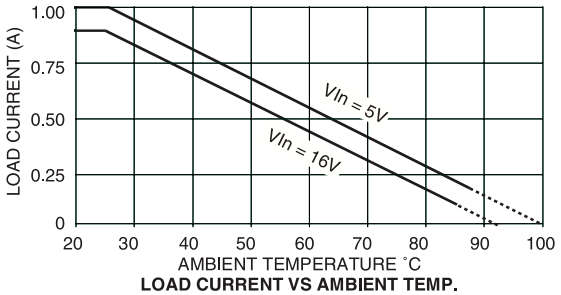


LOAD CURRENT VS AMBIENT TEMP.
FIGURE 2

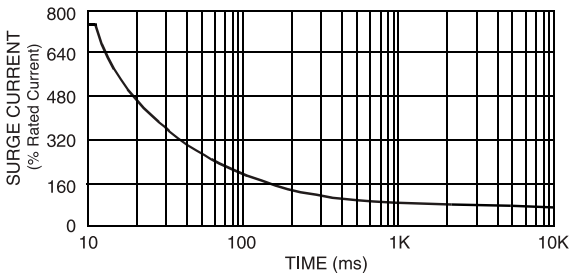

PEAK SURGE CURRENT VS DURATION
FIGURE 3

TYPICAL INTERFACE TO TTL AND CMOS LOGIC

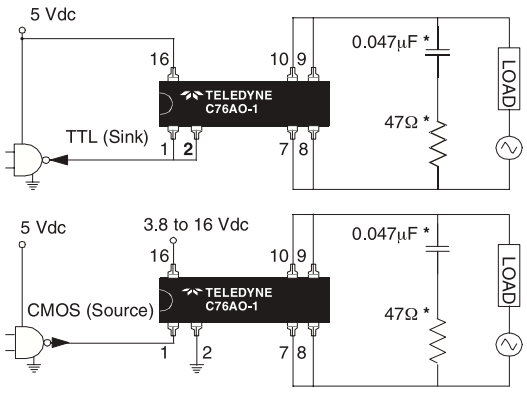

* RC snubber network is optional for protecting switching system from high voltage transients

FIGURE 4

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE © 2002 TELEDYNE RELAYS

INPUT (CONTROL) SPECIFICATIONS


Parameter		Min	Max	Units
Control Voltage Range	V_{IN} = 115 Vrms	90	135	Vrms
	V_{IN} = 220 Vrms	180	250	Vrms
Input Current	V_{IN} = 115 Vrms		3.5	mA
	V_{IN} = 220 Vrms		3.0	mA
Must Turn-Off Voltage	115 Vrms; V_{IN}	20		Vrms
	230 Vrms; V_{IN}	50		Vrms
Input Transient (≤ 1ms)			±600	Vpeak

INPUT (ENABLE) SPECIFICATIONS

Parameter	Min	Max	Units
Enable Voltage	2.0	15.0	Vdc
Enable Current		10.0	µA


OUTPUT SPECIFICATIONS

Parameter	Min	Max	Units
Logic Supply Voltage (V_{CC})	4.0	16.0	Vdc
Breakdown Output Voltage Rating (Vo)		60	Vdc
Output Current Rating (See Figure 3)		100	mA
On Resistance		6.0	Ohms
Output Leakage Current @ 15 Vdc		10	µA
Turn-On Time		40	ms
Turn-Off Time		40	ms
Insulation Resistance (Input to Output)	10^9		Ohms
Dielectric Strength (Input to Output)	3750		Vac
Capacitance (Input to Output)		5.0	pF
Junction Temperature (T_J)		125	˚C
Output Voltage Drop		0.5	Vdc

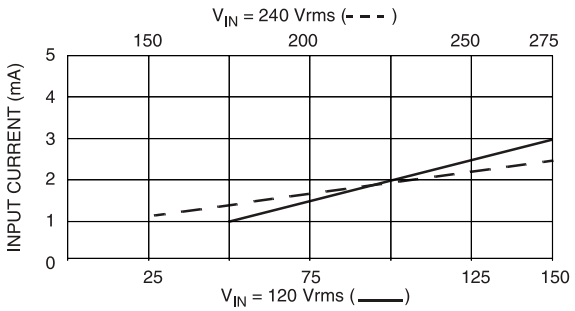


INPUT CURRENT VS INPUT VOLTAGE (TYPICAL)

FIGURE 1

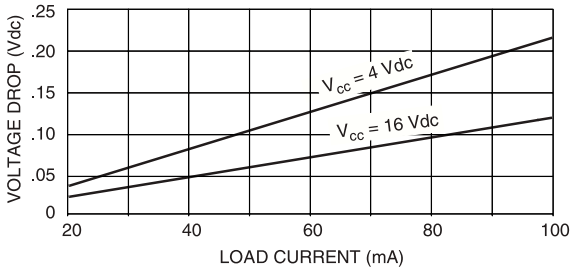

LOAD CURRENT VS OUTPUT VOLTAGE DROP (TYPICAL)


FIGURE 2

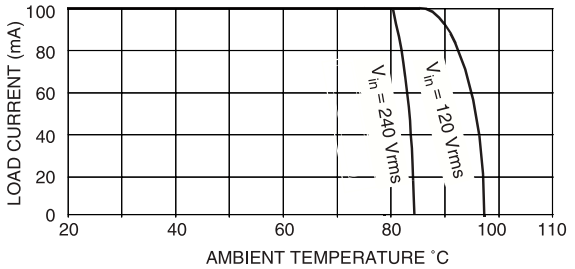

LOAD CURRENT VS AMBIENT TEMPERATURE

FIGURE 3

TYPICAL INTERFACE TO I/O PORT

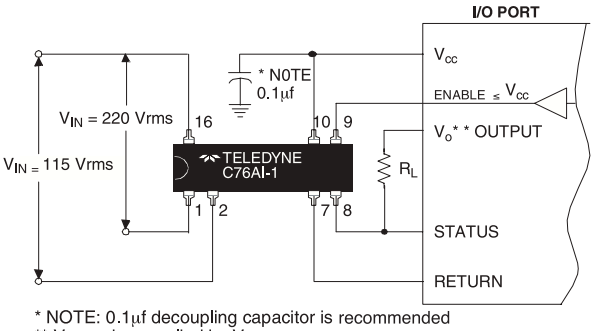

* NOTE: 0.1µf decoupling capacitor is recommended
** V_o maybe supplied by V_{cc}

ELECTRICAL SPECIFICATIONS
(25˚C UNLESS OTHERWISE SPECIFIED)

INPUT (CONTROL) SPECIFICATIONS


Parameter	Min	Max	Units
Control Voltage Range	9.0	60.0	Vdc
Control Current @ 55 Vdc		10.0	mA
Must Turn-On Voltage	9.0		Vdc
Must Turn-Off Voltage		1.5	Vdc
Input Transient (≤ 1ms)		100	Vdc

INPUT (ENABLE) SPECIFICATIONS


Parameter	Min	Max	Units
Enable Voltage	2.0	15.0	Vdc
Enable Current		10.0	μA

OUTPUT (LOAD) SPECIFICATIONS


Parameter	Min	Max	Units
Logic Supply Voltage (V_{cc})	4.0	16.0	Vdc
Output Breakdown Voltage Rating (Vo)		60	Vdc
Output Current Rating		100	mA
Output Voltage Drop		0.5	Vdc
Leakage Current (Off-State) @ 15 Vdc		10.0	μA
Turn-On Time		3.0	ms
Turn-Off Time		3.0	ms
Isolation (Input to Output)	10^9		Ohms
Dielectric Strength (Input to Output)	3750		Vac
Capacitance (Input to Output)		5.0	pF
Junction Temperature (T_J)		125	˚C

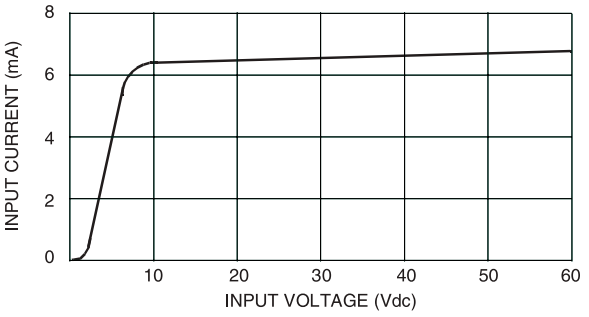

INPUT CURRENT VS INPUT VOLTAGE (TYPICAL)
FIGURE 1

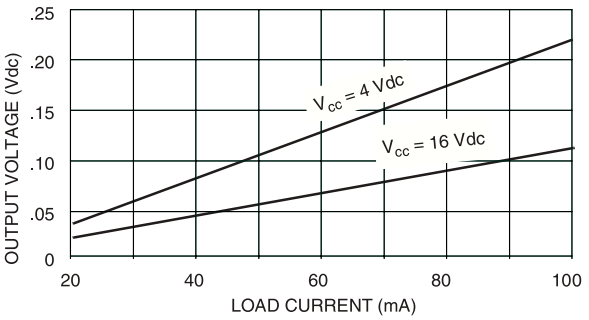


LOAD CURRENT VS VOLTAGE DROP (TYPICAL)
FIGURE 2

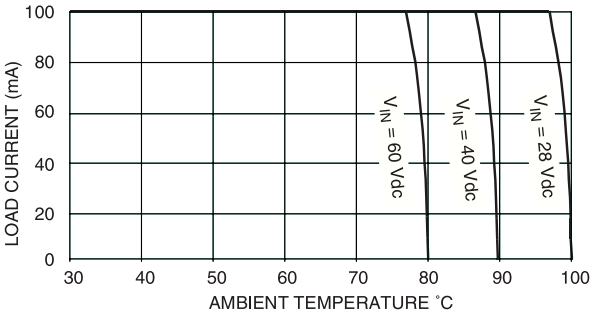

LOAD CURRENT VS AMBIENT TEMPERATURE
FIGURE 3

TYPICAL INTERFACE TO I/O PORT

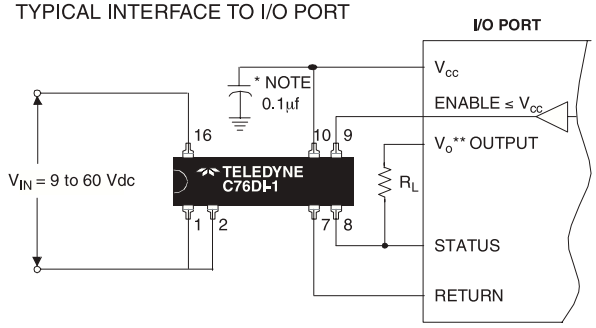

* NOTE: 0.1μf decoupling capacitor is required
** V_o maybe supplied by V_{cc}

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE © 2002 TELEDYNE RELAYS

ELECTRICAL SPECIFICATIONS

(25˚C UNLESS OTHERWISE SPECIFIED)

TTL INPUT (2 TERMINAL) SPECIFICATIONS (See Figure 4)


Parameter	Min	Max	Units
Control Voltage Range	3.8	16.0	Vdc
Control Current @ 5.0 Vdc		15.0	mA
Must Turn-On Voltage	3.8		Vdc
Must Turn-Off Voltage		1.5	Vdc
Reverse Voltage Protection		-32.0	Vdc

CMOS INPUT (3 TERMINAL) SPECIFICATIONS (See Figure 4)


Parameter	Min	Max	Units
Control Voltage		16.0	Vdc
Control Current @ 5 Vdc		250	µA
Must Turn-On Voltage	0.5		Vdc
Must Turn-Off Voltage		2.8	Vdc
Bias Supply Range	3.8	16	Vdc
Bias Current		15	mAdc

OUTPUT (LOAD) SPECIFICATIONS


Parameter	Min	Max	Units
Load Voltage Range	3.0	60	Vdc
Output Current Rating		600	mAdc
Output Voltage Drop @ 600 mA		1.5	Vdc
Turn-On Time		50	µs
Turn-Off Time		180	µs
Leakage Current (Off-State) @ 50 Vdc		20	µA
Isolation (Input to Output)	10^9		Ohms
Dielectric Strength (Input to Output)	3750		Vac
Capacitance (Input to Output)		5.0	pF
Junction Temperature (T_J)		150	˚C

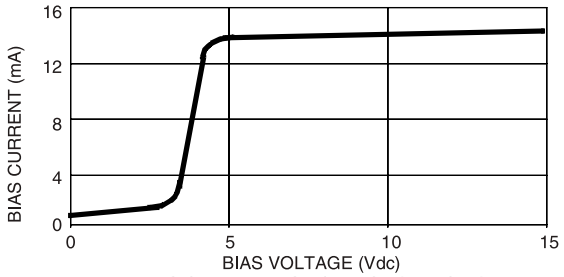

BIAS CURRENT VS VOLTAGE (TYPICAL)
FIGURE 1

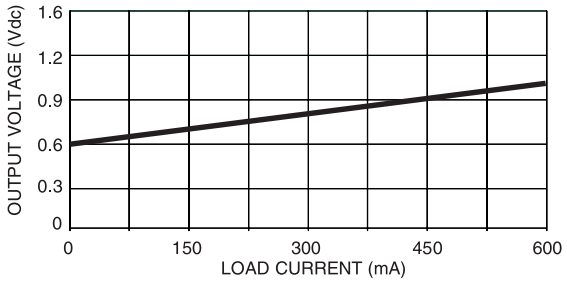

LOAD CURRENT VS OUTPUT VOLTAGE DROP
FIGURE 2

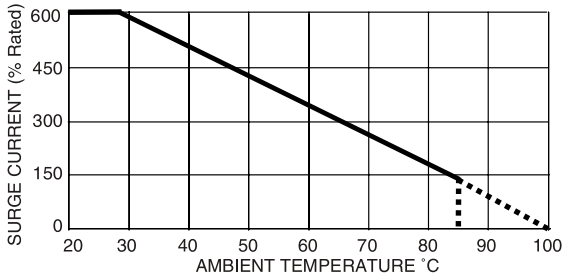

LOAD CURRENT VS AMBIENT TEMPERATURE ˚C
FIGURE 3

TYPICAL INTERFACE TO TTL AND CMOS LOGIC

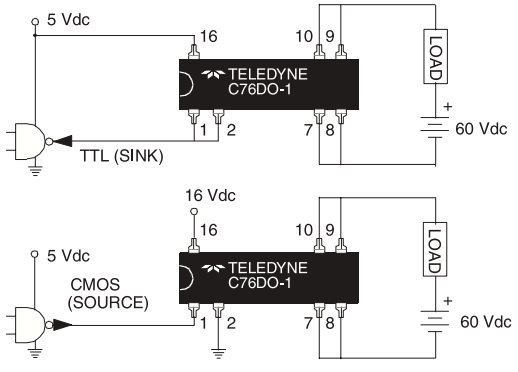


FIGURE 4