
This document was generated on 05/24/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: 0452802202
Status: Active
Overview: microfit_30
Description: 3.00mm (.118") Pitch Micro-Fit 3.0 BMI CPI™ Compliant Pin Header, Blind Mate Interface, Dual Row, Vertical, 22 Circuits, PA Polyamide Nylon 4/6, UL 94V-0, 0.38µm (15µ") Gold (Au) Selective Contact Plating, Tin/Lead (Sn/Pb) Tail Plating



Series image - Reference only

Documents:

- 3D Model
- Drawing (PDF)
- Product Specification PS-44300-001 (PDF)
- RoHS Certificate of Compliance (PDF)

Agency Certification

CSA	LR19980
TUV	R72081037
UL	E29179

General

Product Family	PCB Headers
Series	45280
Application	Board-to-Board, Wire-to-Board
Application Tooling Part Link	622008400
Overview	microfit_30
Product Literature Order No	USA-106
Product Name	Micro-Fit 3.0 BMI CPI™

Physical

Breakaway	No
Circuits (Loaded)	22
Circuits (maximum)	22
Color - Resin	Black
Durability (mating cycles max)	30
Flammability	94V-0
Glow-Wire Compliant	No
Guide to Mating Part	Yes
Lock to Mating Part	None
Material - Metal	High Performance Alloy (HPA)
Material - Plating Mating	Gold
Material - Plating Termination	90/10 Tin Lead
Material - Resin	High Temperature Thermoplastic
Number of Rows	2
Orientation	Vertical
PC Tail Length (in)	0.189 In
PC Tail Length (mm)	4.80 mm
PCB Locator	Yes
PCB Retention	Yes
Packaging Type	Tray
Pitch - Mating Interface (in)	0.118 In
Pitch - Mating Interface (mm)	3.00 mm
Plating min: Mating (µin)	15
Plating min: Mating (µm)	0.375
Plating min: Termination (µin)	100
Plating min: Termination (µm)	2.5
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Shrouded	Fully
Stackable	No

EU RoHS
RoHS Compliant by Exemption
China RoHS
50
Pb
REACH SVHC
Contains SVHC: No
Halogen-Free Status
Not Halogen-Free

Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, click here

Please visit the Contact Us section for any non-product compliance questions.

Search Parts in this Series
45280Series

Mates With
44133-2200 Panel Mount Receptacle,
44769-2202 Vertical Receptacle Header,
44764-2202 Right Angle Receptacle Header

Application Tooling | **FAQ**
Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.

Global

Description	Product #
Micro-Fit™ Compliant Pin Insertion Flat Rock Tool	0622008400

Surface Mount Compatible (SMC)	No
Temperature Range - Operating	-40°C to +105°C
Termination Interface: Style	Through Hole - Compliant Pin

Electrical

Current - Maximum per Contact	5A
Voltage - Maximum	250V

Solder Process Data

Replacement RoHS Compliant Part Number	0452802252


Material Info


Reference - Drawing Numbers


Packaging Specification	PK-45280-002
Product Specification	PS-44300-001, RPS-44300-001
Sales Drawing	SD-45280-001
Test Summary	TS-45280-001


This document was generated on 05/24/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

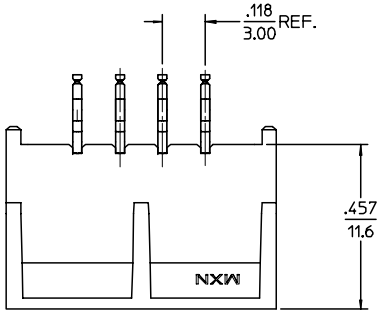




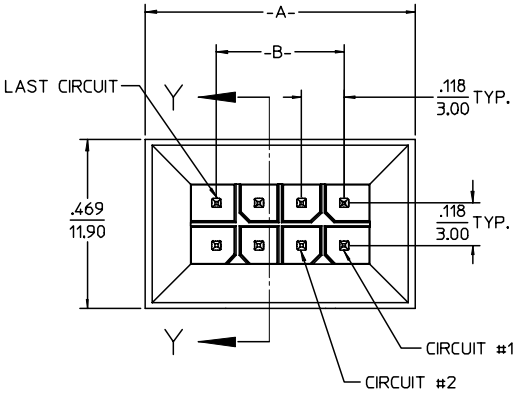




SECTION Y-Y

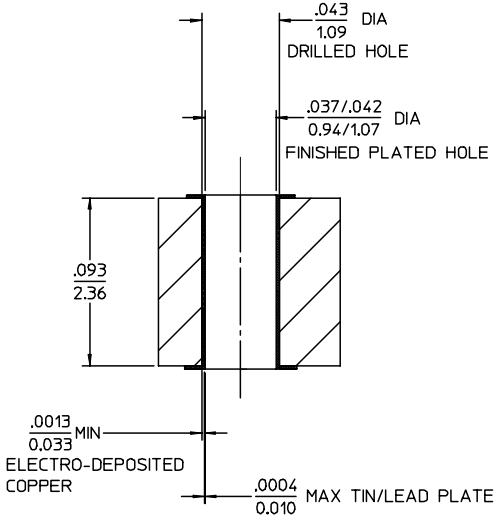

SECTION Z-Z

SCALE : 20/1

CIRCUIT SIZE	DIM. -A-	DIM. -B-	DIM. -C-
04	.512/13.00	.118/3.00	.472/12.00
06	.630/16.00	.236/6.00	.590/15.00
08	.748/19.00	.354/9.00	.709/18.00
10	.866/22.00	.472/12.00	.827/21.00
12	.984/25.00	.590/15.00	.945/24.00
14	1.102/28.00	.709/18.00	1.063/27.00
16	1.220/31.00	.827/21.00	1.181/30.00
18	1.338/34.00	.945/24.00	1.299/33.00
20	1.457/37.00	1.063/27.00	1.417/36.00
22	1.575/40.00	1.181/30.00	1.535/39.00
24	1.693/43.00	1.299/33.00	1.653/42.00

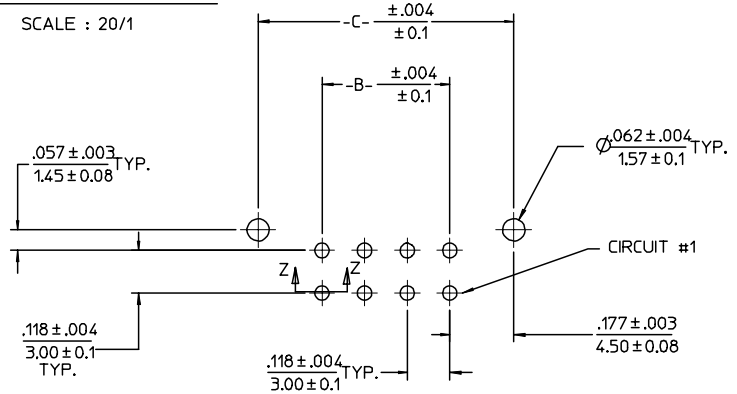

RECOMMENDED PCB LAYOUT
(COMPONENT SIDE)
RECOMMENDED PCB THICKNESS .093/2.36 MIN.

NOTES:

1. MATERIALS:
   HOUSING: GLASS FILLED NYLON, UL94V-0, COLOR: BLACK.
   TERMINALS: COPPER ALLOY.
2. FINISH:
   A= .000200/(0.00508) MIN. BRIGHT TIN OVER .000050/(0.00127) MIN. NICKEL.
   B= .000015/(0.00038) MIN. GOLD IN CONTACT AREA AND .000100/(0.00254) MIN. TIN/LEAD (90/10) ON PCB TAILS BOTH OVER .000050/(0.00127) MIN. NICKEL OVERALL.
   C= .000030/(0.00076) MIN. GOLD IN CONTACT AREA AND .000100/(0.00254) MIN. TIN/LEAD (95/05) ON PCB TAILS BOTH OVER .000050/(0.00127) MIN. NICKEL OVERALL.
   D= .000200/(0.00508) MIN. MATTE TIN IN CONTACT AREA AND .000100/(0.00254) MIN. MATTE TIN ON PCB TAILS BOTH OVER .000050/(0.00127) MIN. NICKEL. OVERALL.
3. PRODUCT SPECIFICATION: PS-44300-001
4. PACKAGING SPECIFICATION: PK-45280-002.
5. THIS ASSEMBLY MATES WITH MOLEX BMI PANEL MOUNT RECEPTACLE
   (SEE DRAWING SD-44133-001) WITH FEMALE CRIMP TERMINAL
   (SEE DRAWING SD-43030-****) AND BMI RECEPTACLE HEADERS
   (SEE DRAWING SD-44764-001 OR SD-44769-001).
6. THIS HEADER REQUIRES A MOLEX INSERTION TOOL (62200-8400) TO PROPERLY INSTALL IT TO THE PCB.

ADD "D" FINISH 2007/04/24
EC NO: UCP2007-2424 2007/04/24
DRWN:MKIPPER CHKD:SSOUSEK 2007/04/24
APPR:FSMITH 2007/04/26
DESCRIPTION
REV
J1

QUALITY SYMBOLS
▼=0
▽=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± .010
2 PLACES	± 0.25	± .015
1 PLACE	± 0.38	± ---

ANGULAR ±1/2°

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: IN/MM
SCALE: 4:1
DESIGN UNITS: METRIC
THIRD ANGLE PROJECTION

DRAWN BY: MARGULIS DATE: 2002/06/11
CHECKED BY: MARGULIS DATE: 2002/06/11
APPROVED BY: R. FRY DATE: 2002/06/11

TITLE: MICRO-FIT (3.0) DUAL ROW VERTICAL BMI CPI HEADER - ASS'Y

MOLEX INCORPORATED

MATERIAL NO.: SEE CHART
DOCUMENT NO.: SD-45280-001
SHEET NO.: 1 OF 2
SIZE: C

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

tb_frame_C_P_AM_T
Rev. D 2004/06/28

MATERIAL NUMBER	CIRCUIT SIZE	PLATING OPTION
452800401	04	A
452800402	04	B
452800403	04	C
452800404	04	D
452800601	06	A
452800602	06	B
452800603	06	C
452800604	06	D
452800801	08	A
452800802	08	B
452800803	08	C
452800804	08	D
452801001	10	A
452801002	10	B
452801003	10	C
452801004	10	D
452801201	12	A
452801202	12	B
452801203	12	C
452801204	12	D
452801401	14	A
452801402	14	B
452801403	14	C
452801404	14	D
452801601	16	A
452801602	16	B
452801603	16	C
452801604	16	D
452801801	18	A
452801802	18	B
452801803	18	C
452801804	18	D
452802001	20	A
452802002	20	B
452802003	20	C
452802004	20	D
452802201	22	A
452802202	22	B
452802203	22	C
452802204	22	D
452802401	24	A
452802402	24	B
452802403	24	C
452802404	24	D

ADD "D" FINISH
EC NO: UCP2007-2424 2007/04/24
DRWN:MKIPPER 2007/04/24
CHKD:SSOUSEK 2007/04/26
APPR:FSMITH
DESCRIPTION
REV
J1

QUALITY SYMBOLS
▼=0
▽=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± .010
2 PLACES	± 0.25	± .015
1 PLACE	± 0.38	± ---

ANGULAR ±1/2°

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: IN/MM
SCALE: 4:1
DESIGN UNITS: METRIC
THIRD ANGLE PROJECTION

DRAWN BY: MARGULIS DATE: 2002/06/11
CHECKED BY: MARGULIS DATE: 2002/06/11
APPROVED BY: R. FRY DATE: 2002/06/11

TITLE
MICRO-FIT (3.0)
DUAL ROW VERTICAL
BMI CPI HEADER - ASS'Y

molex MOLEX INCORPORATED

MATERIAL NO.: SEE CHART
DOCUMENT NO.: SD-45280-001
SHEET NO.: 2 OF 2
SIZE: C

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION