
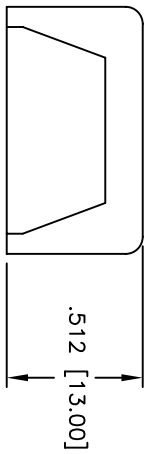
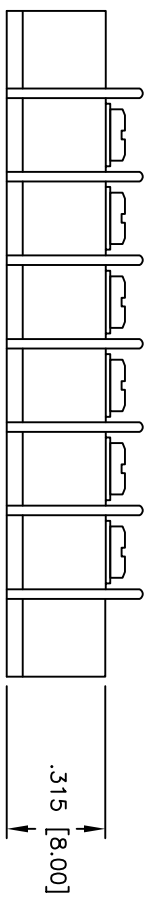


Rev	AWO #	Description	Date	Appr
-		RELEASED	6/22/07	

APPROVED: _____
 DATE: _____ TITLE: _____

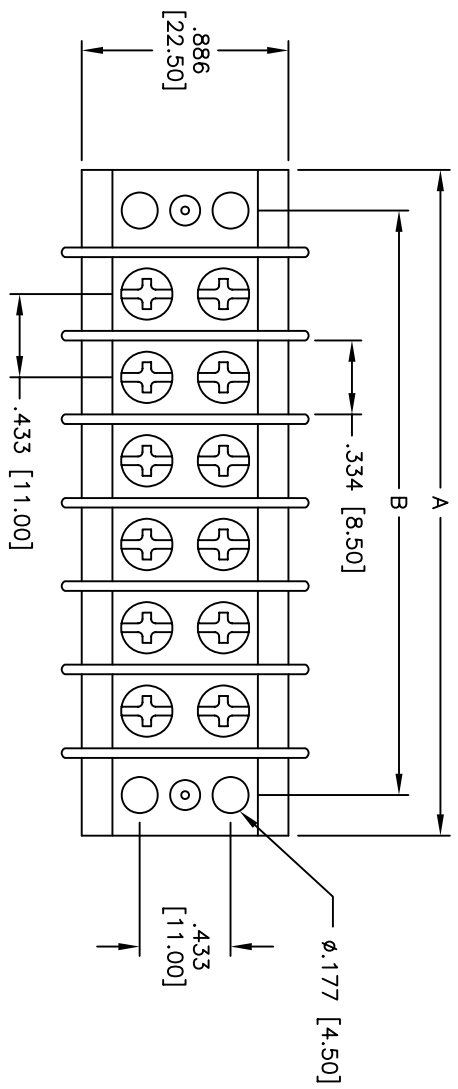

B

SPECIFICATIONS:

Material:
 Insulator: Phenolic, glass reinforced, rated UL 94V-0
 Insulator color: Black

Plating:
 Contacts: Brass, Tin plated
 Screws: Steel, Nickel plated
 Hardware: Brass, Tin plated

Electrical:
 Operating voltage: 300 VAC max.
 Current rating: 20 Amps max.

Mechanical:
 Contact resistance: 20 mohms max. initial
 Insulation resistance: 500 Mohms min. @ 500 VDC
 Dielectric withstanding voltage: 2,000 VAC for 1 minute

Environmental:
 Wire range: 18 - 12 AWG
 Operating temperature: -40°C to +100°C
 Lead free, RoHS compliant

Positions: 2 thru 26
 A = .433 [11.00] x (No. of Poles + 1) per row + .382 [9.70]
 B = .433 [11.00] x (No. of poles + 1) per row

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	HOLDS
.X ± .10	ØX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

APPROVALS	DATE	TITLE
DRAWN SS	6/22/07	.433 [11.00] DUAL ROW BARRIER BLOCK
CHECKED		SIZE PART NO. TDB-XX
APPROVED		SCALE: NTS SHEET 1 OF 1

6

5

4

3

2

1

A

A

B

C

C

D

D

6

5

4

3

2

1