

100 BASE-T4 TRANSFORMERS

Four Transformers per Unit

Electrical Specifications at 25° C

Part Number	Turns Ratio ±3%	OCL Min. (μH)	L _L max. (μH)	DCR _p max. (Ω)	C _{w/w} max. (pF)	Isolation (V _{RMS})
T-15200	1:2CT	350	1.0	0.5	14	1500
T-15201	2CT:1CT	350	1.0	1.0	10	1500

The above parts are available in surface mount versions.
Add suffix "G". See data sheet for dimensions.

Designed to provide isolation and impedance matching for 4 twisted pairs in a 100 Mbps Transmission over UTP-3 Cable.


Designed for popular 100Base-T4 transceiver chips

IEEE 802.3 Compatible


Fast Rise Times

Common Mode Choke available for improved EMI performance

T-15200 Schematic Diagram

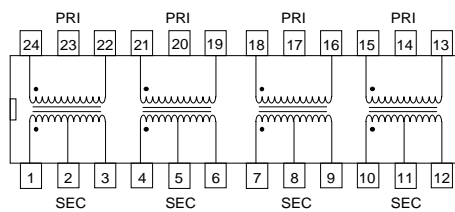

T-15200 Schematic Diagram

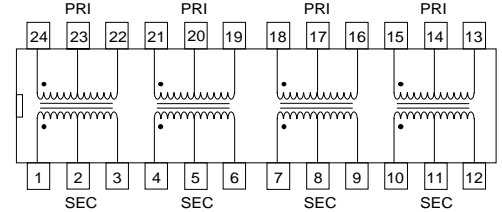


T-15200 : Designed for use with SEEQ 80C240P

T-15201 : Designed for use with Cypress CY7C971

Physical Dimensions inches (mm)


SMD versions available on Tape & Reel

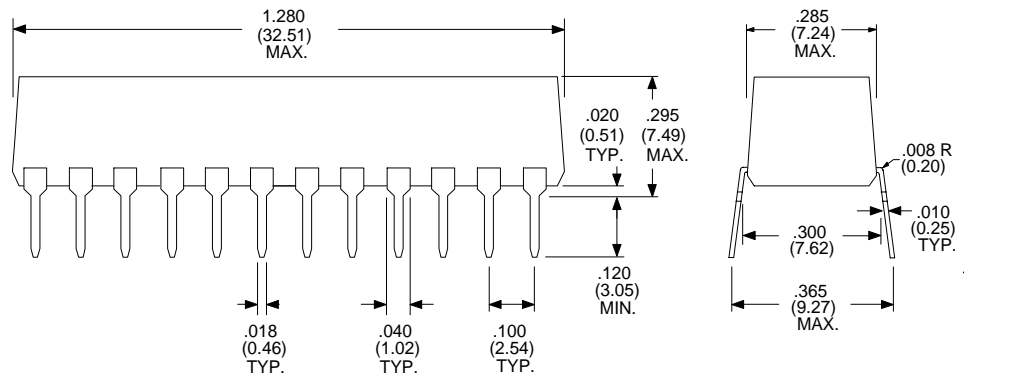

100 BASE-T4 COMMON MODE CHOKE

Electrical Specifications at 25° C

Part Number	Turns Ratio ±3%	OCL Min. (μH)	L _L max. (μH)	DCR _p max. (Ω)	C _{w/w} max. (pF)	Isolation (V _{RMS})
F-1515	1 : 1	36	0.2	0.35	15	500

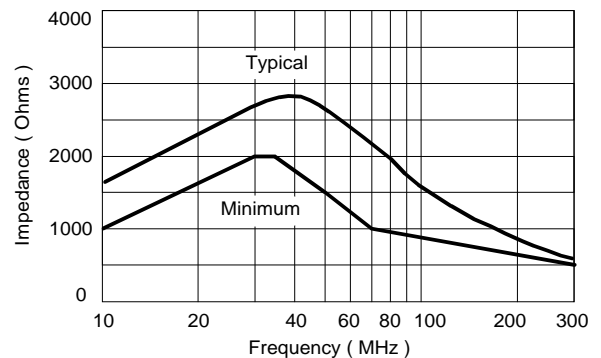

Dimensions in Inches (mm)

Impedance Ω (Min.)
2000 @ 30 Mhz
1500 @ 50 Mhz
1000 @ 70 Mhz

F-1515 Schematic Diagram

