

SHEET OF


NOTES:
1. ALL DIMENSION IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
   X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. CONTACT RATING SWITCHING: 150mA, 250V AC/DC
   350mA, 110V AC/DC
▲ 5. CONTACT MATERIAL: Gold Flash over Copper Alloy.
6. OPERATING FORCE: 425±100 CM/STANDARD
7. OPERATING TEMP: −30° to 85°C
▲ 8. CIRCUIT 2Pole: 5 POSITIONS, 30° INDEX.
9. DIELECTRIC STRENGTH: 1000V RMS min. @SEA LEVEL
▲10. DESIGNATE MAJOR DIMENSIONS
11. STOP RING, LOCK NUT AND WASHER NOT SHOWN.





CONTACT CONFIGURATION
(BBM)

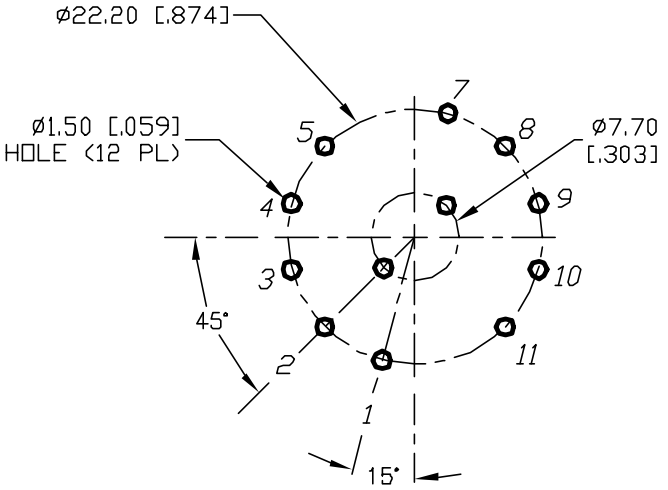

RECOMMENDED P.C.B. LAYOUT

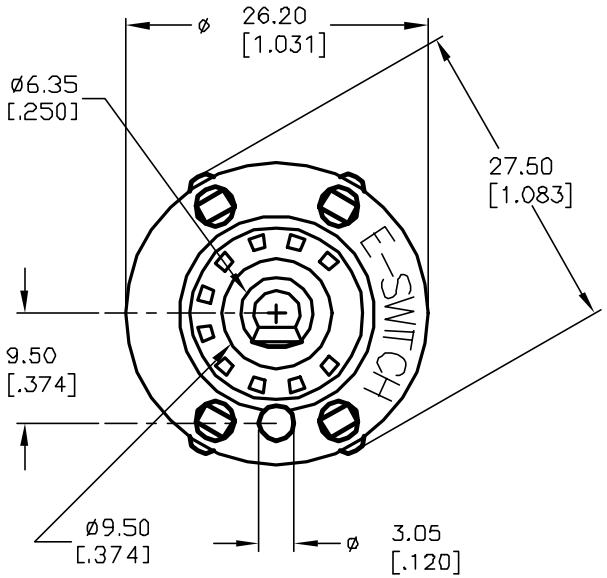

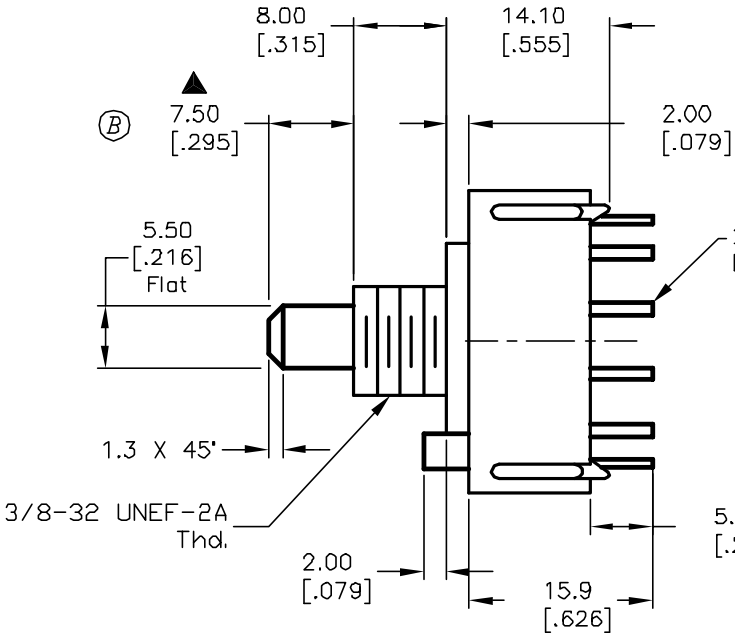

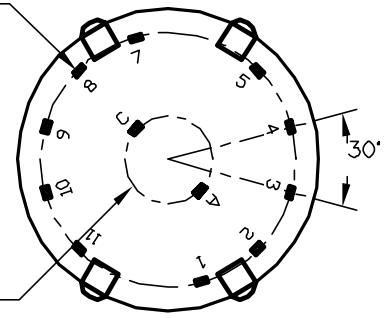

REV.	ECN No.	DESCRIPTION	DATE	CHKD
B	11914	REVISED PART DESCRIPTION	1/4/02	CJB

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

TITLE: KC-25-A (7.5) -01-N-P-F

SCALE	DATE	DR	DWG	REV
1.5:1	5/29/01	CJB	G510251	B