


|          |        |           |
|----------|--------|-----------|
| DASH NO. | M CODE | MADE FROM |
|----------|--------|-----------|

# GSD

126-35-9

### REVISIONS

| ISSUE | CHANGES                               |
|-------|---------------------------------------|
| 1     | CN 34481 C<br>REDRAWN<br>JCA 05/28/93 |
| 2     | CN 38226 C<br>BDH 02/27/01            |

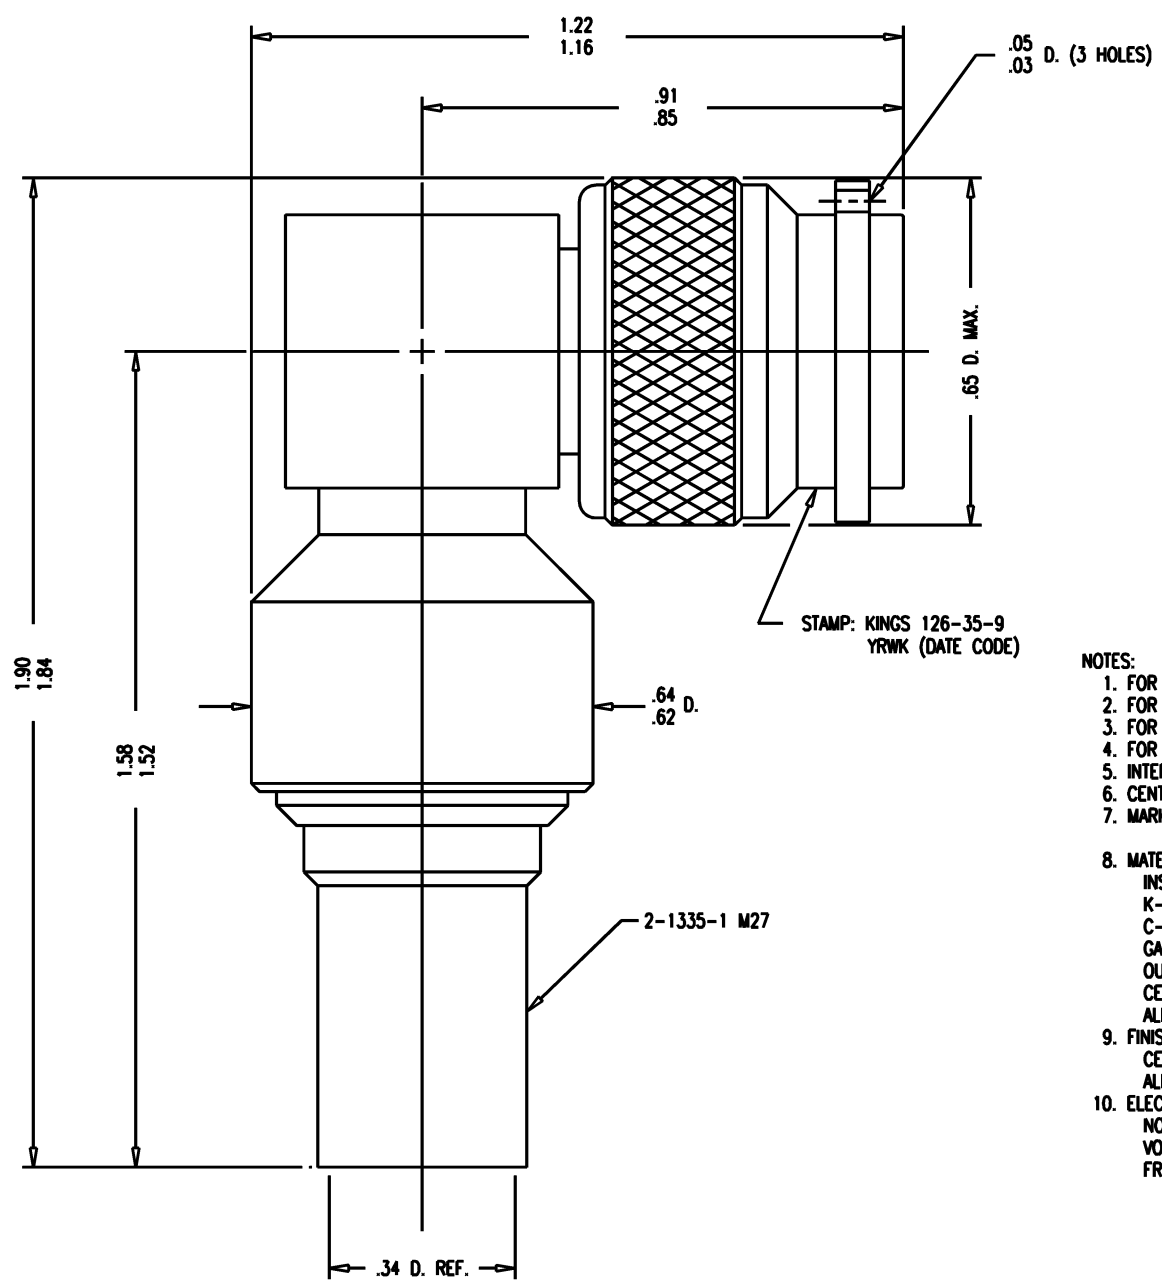

#### NOTES:

- FOR USE WITH TIMES AA-5887 CABLE.
- FOR CABLING INSTRUCTIONS SEE 3-440-2.
- FOR CABLE TRIMMING USE KTJ-150 & KTD-138.
- FOR CRIMPING USE DIE KTH-1077.
- INTERFACE PER MIL-STD-348, FIG. 313-1.
- CENTER CONTACT (1-5704-2MA9) SUPPLIED UNASSEMBLED.
- MARK PACKAGE: KINGS 126-35-9  
XX XX (DATE CODE)
- MATERIALS:  
INSULATORS: TEFLON, ASTM-D-1457  
K-GRIP SLEEVE: COM. BRONZE TUBE, ALLOY 220  
C-RING: PHOS. BRONZE, QQ-B-750  
GASKET: SIL. RUB., ZZ-R-765  
OUTER CONTACT } BER. COP., ASTM-B-196  
CENTER CONTACT }  
ALL OTHER METAL PARTS: BRASS, ASTM-B16
- FINISHES:  
CENTER CONTACTS: HARD GOLD PLATE PER MIL-G-45204  
ALL OTHER METAL PARTS: KINGS TARNISH RESISTANT FINISH (TR-5)
- ELECTRICAL CHARACTERISTICS:  
NOMINAL IMPEDANCE: 50 OHMS  
VOLTAGE RATING: 500 VRMS  
FREQUENCY RANGE: DC TO 11 GHz

JCA3917

SCALE 4:1

APPROX SURFACE AREA

WAS: E-15911

USED ON

REF:

PLUG, ANGLE, TNC

DRAWN JCA DATE 05/28/93

DESIGN MJB DATE 07/23/93

APPR. DATE

**KINGS**  
ELECTRONICS CO., INC.  
ROCK HILL, SOUTH CAROLINA 29730

# GSD

126-35-9