





受控文件

FH1-2

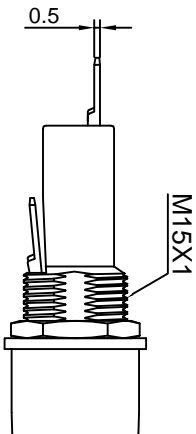


Fuse holder for overload protection

Screw-in mounting


Rating: 10A 250VAC (UL,CUL)

Fuse: Ø6.0x30mm 

Cap:Screw type


Panel thickness:4.5mm max 

Operating Temperature:-10 ~+70

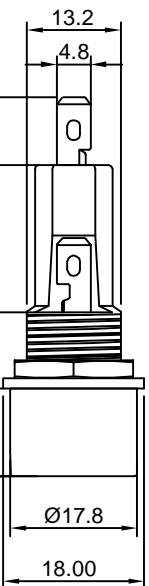

cJus

CUT-OUT



MATERIAL:

Housing:PBT,UL rated 94V2 min  
Bayonet:PBT,UL rated 94V2 min  
Terminal:Brass,silver or tin plated  
Nut:Brass,Ni plated



		公差 TOLERANCES		.X± 0.3 .XX± 0.15		角度 ANGLE ± ↑		单位 DIMENSION UNIT		mm.	
		版本: VERSION		A1		比例尺 SCALE		日期 DATE		品名 TITLE	
		重新整理发行		2009.09.05		1:1		2009.02.26		FH1-2	
		New Issue		2009.02.26		李伟奇		黄雄阳		图号 DRAWING NO	
		变更说明 CHANGE DESCRIPTION		日期 DATE		核 对 CHECKED BY		绘图 DRAWN BY		FH1-2_A1	
		A0		N/A		李新超					
		版本 VER		EON NO		APPROVED BY					