

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT - By - TE CONNECTIVITY

ALL RIGHTS RESERVED.


LOC
HBDIST
-

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
E		REMOVED RIB ON BASE TO CASE ECO-15-011310	18Dec2015	HYS	CHL




PART A

PART B

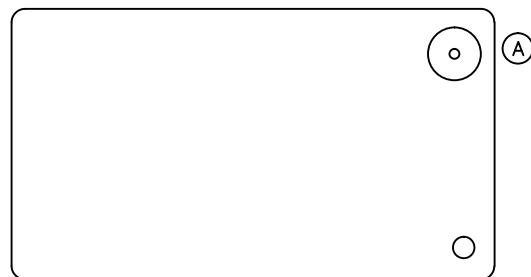

(B) (B1)

(C)

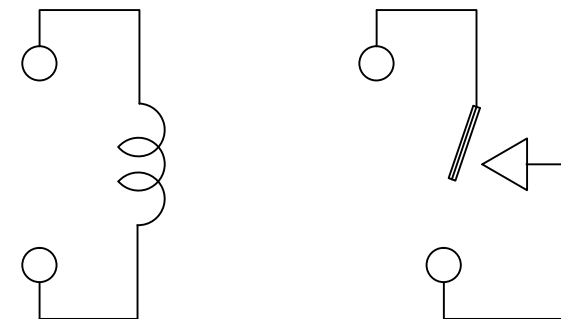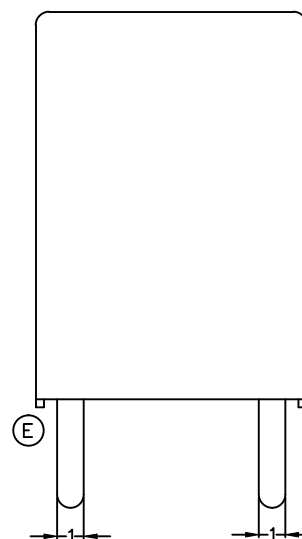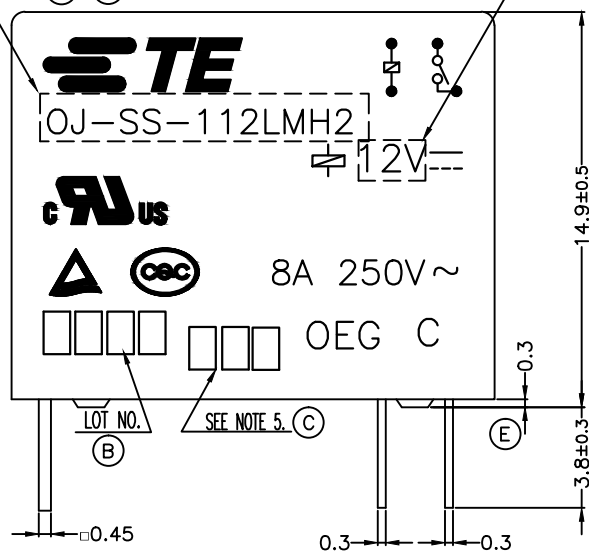

CONNECTION FIGURE


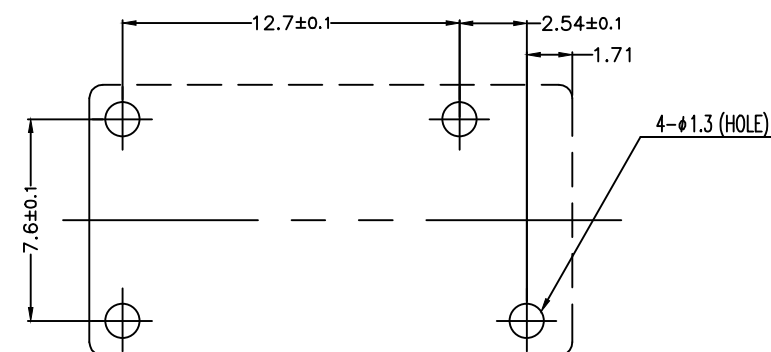
FIGURE FOR PRINTED CIRCUIT BOARD PROCESSING
(BOTTOM VIEW)

Diagram dimension	Tolerance
0.99mm max.	±0.1mm
1 - 2.99mm	±0.2mm
3mm min.	±0.3mm

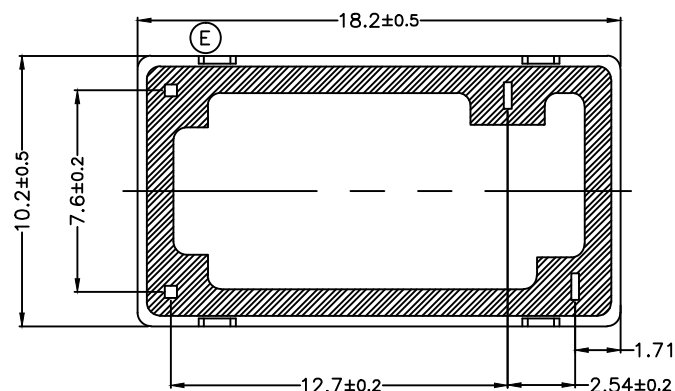

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN Hu.Xieli

CHK Mingjung.Ho

APVD Mak.simon

PRODUCT SPEC

SEE PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING



TE Connectivity

NAME


OJ-KMH2 SPEC.000 CUSTOMER DRAWING

RESTRICTED TO

SIZE CAGE CODE DRAWING NO

A3 00779 C= 1721260

SCALE 5:1 SHEET 1 OF 2 REV E

DIMENSIONS:
mmTOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± -
4 PLC ± -
ANGLES ± -

MATERIAL

FINISH

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

- , - .

© COPYRIGHT - By - TE CONNECTIVITY

ALL RIGHTS RESERVED.

LOC
HBDIST
-

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
-	-	SEE SHEET 1	-	-	-

107-79010	1-1721260-2	OJ-SH-124LMH2	24V	OJ-SH-124LMH2	I	①
	1-1721260-1	OJ-SH-112LMH2	12V	OJ-SH-112LMH2	k	①
	1-1721260-0	OJ-SH-109LMH2	9V	OJ-SH-109LMH2	j	①
	1721260-9	OJ-SH-106LMH2	6V	OJ-SH-106LMH2	i	①
	1721260-8	OJ-SH-105LMH2	5V	OJ-SH-105LMH2	h	①
	1721260-7	OJ-SH-103LMH2	3V	OJ-SH-103LMH2	g	①
	1721260-6	OJ-SS-124LMH2	24V	OJ-SS-124LMH2	f	①
	1721260-5	OJ-SS-112LMH2	12V	OJ-SS-112LMH2	e	①
	1721260-4	OJ-SS-109LMH2	9V	OJ-SS-109LMH2	d	①
	1721260-3	OJ-SS-106LMH2	6V	OJ-SS-106LMH2	c	①
	1721260-2	OJ-SS-105LMH2	5V	OJ-SS-105LMH2	b	①
	1721260-1	OJ-SS-103LMH2	3V	OJ-SS-103LMH2	a	①
PACKAGE SPEC	TE PART NO	DESCRIPTION	PART B	PART A	TYPE	

RELAY TYPE

② NOTES:

1.LOT NO. SYSTEM AS FOLLOWING: ⑤ 5.ADD LOT NO. SYSTEM AS FOLLOWING;

WEEK
YEAR

1	1	A
I	II	III

I, DIGITS FOR DAY OF THE WEEK

1...MONDAY IN THIS WEEK;

2...TUESDAY IN THIS WEEK;

.....

7...SUNDAY IN THIS WEEK

II, DIGITS FOR SHIFT OF THE DAY

1...DAY SHIFT IN THIS DAY;

2...NIGHT SHIFT IN THIS DAY;

III, ONE CHARACTER DISTINGUISH THE LINE IDENTITY,
SUCH AS: A,B.....Z

② 2.TERMINAL DIMENSION IS BEFORE SOLDER DIP;

③ 3.FOR THE TIN-PLATING OF THE PINS:
+0.1mm FOR WIDTH,THICKNESS AND DIAMETER.
+0.5mm FOR LENGTH.

④ ⑤ 4.MARKING FROM INK TO LASER AND USING WELDED CONTACT

		UV RESIN	UV SEAL	16
		EPOXY RESIN	SEAL (BASE & BOBBIN)	15
		3UEW	MAGNETIC WIRE	14
UL94V-0		P.B.T	CASE	13
UL94V-0		P.B.T	BASE	12
UL94V-0		P.B.T	BOBBIN	11
	SOLDER DIP	C.P WIRE	COIL TERMINAL	10
UL94V-0		P.P.S	CARD	9
		AgSnOInO	MOVABLE CONTACT	8
		AgSnOInO	NO.CONTACT	7
		STEEL	HINGE SPRING	6
	SOLDER DIP	Cu ALLOY	NO.TERMINAL	5
	SOLDER DIP	Cu ALLOY	MOVABLE SPRING	4
	NIP	STEEL	CORE	3
	NIP	STEEL	ARMATURE	2
	NIP	STEEL	YOKE	1
INCOMBUSTIBILITY	TREATMENT	MATERIAL	DESCRIPTION	ITEM

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	Hu.Xieli	-			
DIMENSIONS: mm		CHK	Mingjung.Ho	-			
		APVD	Mak.simon	-			
		PRODUCT SPEC		NAME			
		SEE PRODUCT SPEC		OJ-KMH2 SPEC.000 CUSTOMER DRAWING			
		APPLICATION SPEC		-			
MATERIAL	FINISH	WEIGHT	-	-			
CUSTOMER DRAWING		SCALE	5:1	SHEET	2 OF 2	REV	E