


IEC plug connector I, rewireable, straight



Description

- Rewireable plug:
Screw-on
- Appliance Inlet, Pin temperature 70 °C, Protection class I
- Cable

Approvals

- UL License Number: E96454
- CSA License Number: 205419

Characteristics

- For use in equipment acc. IEC 60950/60601

References

[General Product Information](#)

Weblinks

[Approvals](#), [RoHS](#), [CHINA-RoHS](#), [e-Store](#), [SCHURTER-Stock-Check](#), [Distributor-Stock-Check](#)


Technical Data

Ratings IEC	16A / 250VAC; 50Hz
Ratings UL/CSA	20A / 250VAC; 60Hz
Dielectric Strength	> 2kVAC between L-N > 2kVAC between L/N-PE (1 min/50Hz)
Allowable Operation Temp.	-25 °C to 70 °C
Degree of Protection	from front side IP 40 acc. to IEC 60529
Protection Class	Suitable for appliances with protection class I acc. to IEC 61140
Terminal	Cable
Material: Housing	Thermoplastic, black, UL 94V-0

Appliance-Inlet/-Outlet	I acc. to IEC/EN 60320-2-2, UL 498, CSA C22.2 no. 42 (for cold conditions) pin-temperature 70 °C, 16A, Protection class I
-------------------------	--

Dimensions

Length |-----| 38 mm

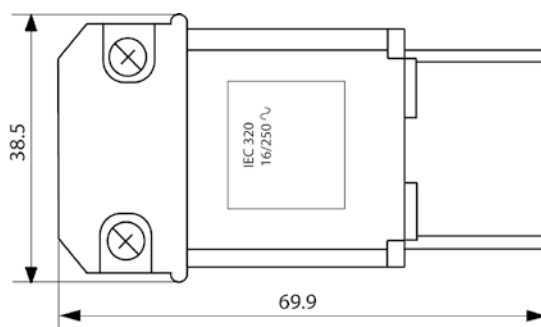

Variants

[Distributor-Stock-Check](#) | [SCHURTER-Stock-Check](#) | [e-Store](#)

Color	Max. cable diameter	Max. wire size	Order Number
black	12.0 mm	3 x 12 AWG	4300.0922

Packaging unit 100 Pcs

Mating Outlets/Connectors

Category / Description

Appliance Outlet



IEC appliance outlet J, screw-on mounting, front side, solder/quick connect terminal	0723
IEC appliance outlet J, snap-in/screw-on mounting, front side, solder/quick connect terminal	4797
IEC appliance outlet J, snap-in mounting, front side, quick connect terminals	5013
IEC appliance outlet J, screw-on mounting, front side, quick connect terminals	5016
IEC appliance outlet J, screw-on mounting, front side, quick connect terminals	5017
IEC appliance outlet J, screw-on mounting, front side, quick connect terminals	5216

Connector



IEC connector C19, rewirable, straight	0104
IEC connector C19, rewirable, angled	1651
IEC connector C19, rewirable, straight	1652
IEC connector C19, rewirable, angled	4790
IEC connector C19, rewirable, straight	4795



Rewireable Connector for Cable, straight entry

IEC cord connector C19, rewirable, straight	0921
---	------