
isc Silicon NPN Power Transistor BU2727AF

DESCRIPTION

- Collector-Emitter Sustaining Voltage-
  : $V_{CEO(SUS)}$= 825V (Min)
- High Switching Speed


APPLICATIONS

- Designed for use in horizontal deflection circuits of color TV receivers.

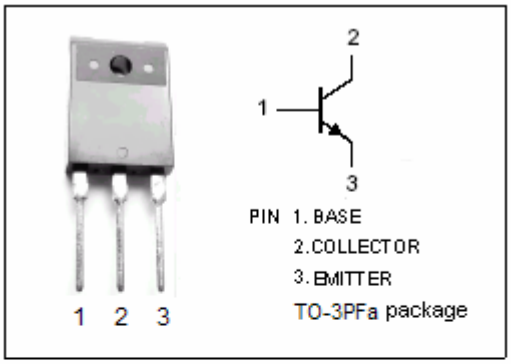

ABSOLUTE MAXIMUM RATINGS(T_a=25℃)

SYMBOL	PARAMETER	VALUE	UNIT
V_{CES}	Collector- Emitter Voltage(V_{BE}= 0)	1700	V
V_{CEO}	Collector-Emitter Voltage	825	V
V_{EBO}	Emitter-Base Voltage	7.5	V
I_C	Collector Current- Continuous	12	A
I_{CM}	Collector Current-Peak	30	A
I_B	Base Current- Continuous	12	A
I_{BM}	Base Current-Peak	25	A
P_C	Collector Power Dissipation @ T_C=25℃	45	W
T_J	Junction Temperature	150	℃
T_{stg}	Storage Temperature Range	-65~150	℃

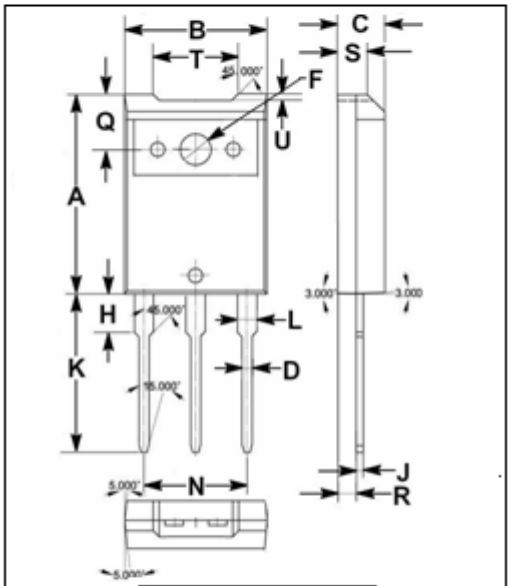

DIM	mm MIN	MAX
A	20.70	21.30
B	14.70	15.30
C	4.80	5.20
D	0.90	1.10
F	3.20	3.40
H	3.70	4.30
J	0.50	0.70
K	16.40	17.00
L	1.90	2.10
N	10.80	11.00
Q	5.60	6.00
R	1.80	2.20
S	3.10	3.50
T	8.70	9.30
U	0.55	0.75

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
$R_{th\ j\text{-}c}$	Thermal Resistance,Junction to Case	2.8	℃/W

isc Silicon NPN Power Transistor BU2727AF

ELECTRICAL CHARACTERISTICS

T_C=25℃ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{CEO(SUS)}$	Collector-Emitter Sustaining Voltage	I_C= 100mA; I_B= 0; L= 25mH	825			V
$V_{(BR)EBO}$	Emitter-Base Breakdown Voltage	I_E= 1mA; I_C= 0	7.5			V
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage	I_C= 5A; I_B= 0.91A			1.0	V
$V_{BE(sat)}$	Base-Emitter Saturation Voltage	I_C= 5A; I_B= 0.91A			1.0	V
I_{CES}	Collector Cutoff Current	V_{CE}= 1700V; V_{BE}= 0 V_{CE}= 1700V; V_{BE}= 0; T_C=125℃			1.0 2.0	mA
I_{EBO}	Emitter Cutoff Current	V_{EB}= 7.5V ; I_C= 0			1.0	mA
h_{FE-1}	DC Current Gain	I_C= 0.1A ; V_{CE}= 5V		22		
h_{FE-2}	DC Current Gain	I_C= 5A ; V_{CE}= 1V	5.5		11	