


# UV Series

Ceramic Wirewound Resistors



- Flameproof Inorganic Construction
- Resistances from 0.01 to 91kOhms
- Tolerance to  $\pm 0.01\%$
- Low Temperature Coefficient
- Power Rating to 10Watts
- All Welded Resistance Element
- Non-Inductive Windings are Available

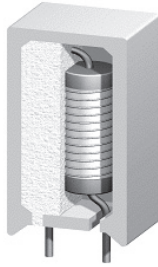


## SPECIFICATIONS

Type	Power Rating W @ 70°C	Resistance <sup>1</sup> Range	H $\pm 0.06$ [ $\pm 1.5$ ]	L $\pm 0.04$ [ $\pm 1.0$ ]	D $\pm 0.04$ [ $\pm 1.0$ ]	W $\pm 0.015$ [ $\pm 0.4$ ]	d <sup>2</sup> $\pm 0.002$ [ $\pm 0.05$ ]
UV-2	2	0.01 to 22k	0.80 [20.3]	0.435 [11.0]	0.275 [7.0]	0.200 [5.1]	0.032 [0.8]
UV-3	3	0.01 to 22k	1.00 [25.4]	0.475 [12.1]	0.320 [8.1]	0.200 [5.1]	0.032 [0.8]
UV-5	5	0.01 to 45k	1.00 [25.4]	0.520 [13.2]	0.350 [8.9]	0.200 [5.1]	0.032 [0.8]
UV-7	7	0.01 to 65k	1.52 [38.7]	0.520 [13.2]	0.380 [9.7]	0.200 [5.1]	0.040 [1.0]
UV-10	10	0.01 to 91k	1.38 [35.1]	0.635 [16.1]	0.480 [12.2]	0.300 [7.6]	0.040 [1.0]

<sup>1</sup> For non-inductive windings / divide maximum resistance by 2

<sup>2</sup> Lead Diameter: 18 AWG = 0.040" / 20 AWG = 0.032"

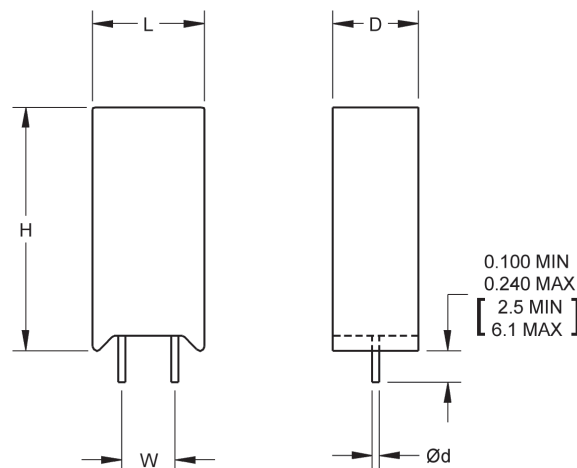

## Ordering Information

For Non-Inductive Windings / insert the letter "N" ( i.e. UVN-5 )

Part Number - Resistance - Tolerance - TCR ( If not standard )

Example: **UV-5 100 Ohm 1%**

# UV Series

Ceramic Wirewound Resistors



## SPECIFICATIONS (continued)

Specification	Value
Tolerances	$\pm 0.01\%$ to $\pm 10\%$ ( 1% Standard )
Temperature Coefficient	$>10\Omega$ : $\pm 20\text{ppm/K}$ $1\Omega$ to $10\Omega$ : $\pm 50\text{ppm/K}$ $<1\Omega$ : Call Factory
Temperature Range	$-55^\circ\text{C}$ to $+275^\circ\text{C}$
Dielectric Strength	1500 VAC
Constuction	Centerless ground ceramic core Tinned copper or copperweld leads High temperature / inorganic potting compound All welded terminations
Environmental Performance (MIL-STD 202)	$\Delta R$
Dielectric	$\pm 0.2\% + 0.05\Omega$
Load Life	$\pm 1\% + 0.05\Omega$
Storage	$\pm 0.2\% + 0.05\Omega$
Moisture Resistance	$\pm 0.2\% + 0.05\Omega$
Thermal Shock	$\pm 0.2\% + 0.05\Omega$
5X Overload ( 5s )	$\pm 0.2\% + 0.05\Omega$
Shock	$\pm 0.1\% + 0.05\Omega$
Vibration	$\pm 0.1\% + 0.05\Omega$

Power Derating Curve

