

IL215A/216A/217A PHOTOTRANSISTOR SMALL OUTLINE SURFACE MOUNT OPTOCOUPLER

FEATURES

- High Current Transfer Ratio, $I_F=1$ mA
IL215A—20% Minimum
IL216A—50% Minimum
IL217A—100% Minimum
- Isolation Voltage, 2500 VAC_{RMS}
- Electrical Specifications Similar to Standard 6 Pin Coupler
- Industry Standard SOIC-8 Surface Mountable Package
- Standard Lead Spacing, .05"
- Available in Tape and Reel Option (Conforms to EIA Standard RS481A)
- Compatible with Dual Wave, Vapor Phase and IR Reflow Soldering
- Underwriters Lab File #E52744 (Code Letter P)

DESCRIPTION

The IL215A/216A/217A are optically coupled pairs with a Gallium Arsenide infrared LED and a silicon NPN phototransistor. Signal information, including a DC level, can be transmitted by the device while maintaining a high degree of electrical isolation between input and output. The IL215A/216A/217A comes in a standard SOIC-8 small outline package for surface mounting which makes it ideally suited for high density applications with limited space. In addition to eliminating through-holes requirements, this package conforms to standards for surface mounted devices.

The high CTR at low input current is designed for low power consumption requirements such as CMOS microprocessor interfaces.

Maximum Ratings

Emitter

Peak Reverse Voltage6.0 V
Continuous Forward Current 60 mA
Power Dissipation at 25°C90 mW
Derate Linearly from 25°C1.2 mW/°C


Detector

Collector-Emitter Breakdown Voltage30 V
Emitter-Collector Breakdown Voltage7 V
Collector-Base Breakdown Voltage70 V
Power Dissipation150 mW
Derate Linearly from 25°C2.0 mW/°C

Package

Total Package Dissipation at 25°C Ambient (LED + Detector).....280 mW
Derate Linearly from 25°C3.3 mW/°C
Storage Temperature -55°C to +150°C
Operating Temperature -55°C to +100°C
Soldering Time at 260°C 10 sec.

Dimensions in inches (mm)

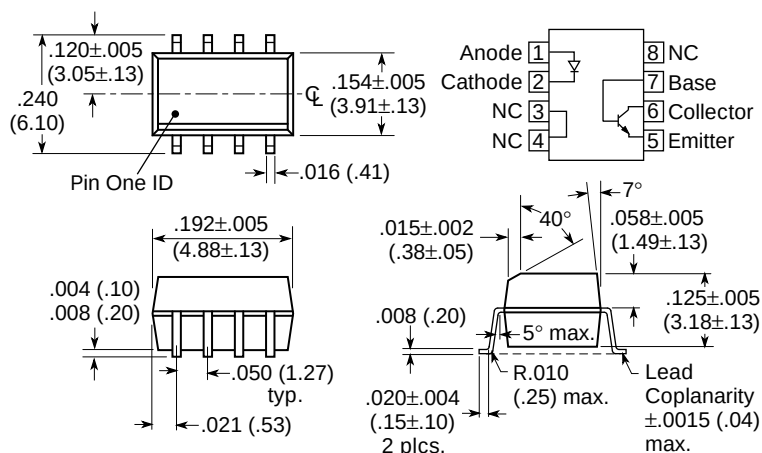

Characteristics (T_A=25°C)

	Symbol	Min.	Typ.	Max.	Unit	Condition
Emitter						
Forward Voltage	V _F		1.0	1.5	V	I _F =1 mA
Reverse Current	I _R		0.1	100	μA	V _R =6.0 V
Capacitance	C _O		25		pF	V _R =0
Detector						
Breakdown Voltage Collector-Emitter Emitter-Collector	B _{VCEO} B _{VECO}		30 7		V V	I _C =10 μA I _E =10 μA
Dark Current, Collector-Emitter	I _{CE0dark}		5	50	nA	V _{CE} =10 V I _F =0
Capacitance, Collector-Emitter	C _{CE}		10		pF	V _{CE} =0
Package						
DC Current Transfer Ratio IL215A IL216A IL217A	CTR _{DC}		20 50 100	50 80 130	%	I _F =10 mA, V _{CE} =5 V
Saturation Voltage, Collector-Emitter	V _{CEsat}			0.5		I _F =1 mA, I _C =0.1 mA
Isolation Test Voltage	V _{IO}	2500			VAC _{RMS}	
Capacitance, Input to Output	C _{IO}		0.5		pF	
Resistance, Input to Output	R _{IO}		100		GΩ	
Switching Time	t _{on} , t _{off}		3.0		μs	I _C =2 mA, R _E =100 Ω, V _{CE} =10 V

Figure 1. Forward voltage versus forward current

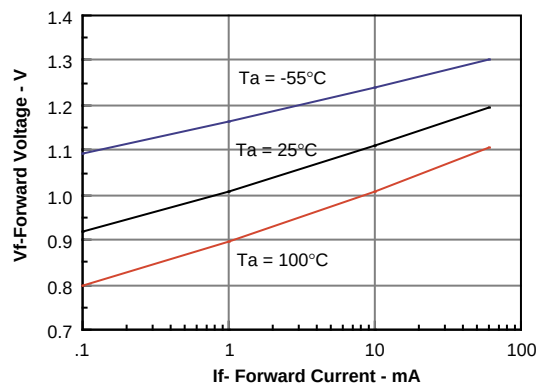


Figure 2. Normalized non-saturated and saturated CTR_{ce} versus LED current

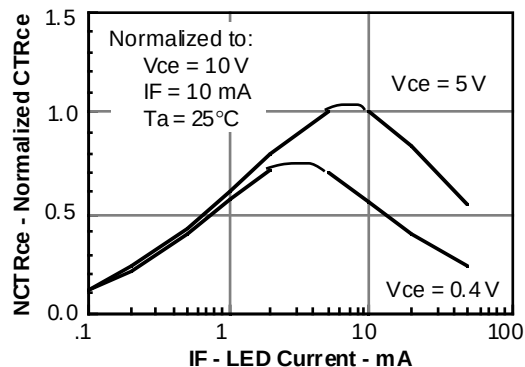


Figure 3. Collector-emitter current versus LED current

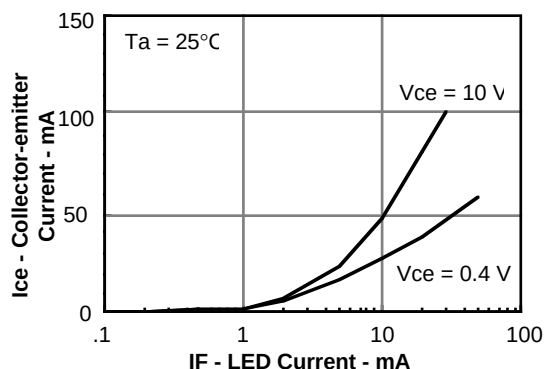


Figure 4. Normalized collector-base photocurrent versus LED current

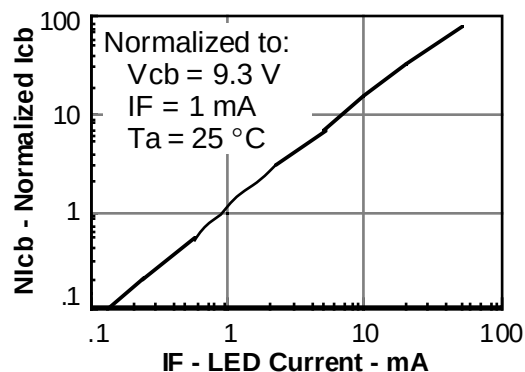


Figure 5. Collector-base photocurrent versus LED current

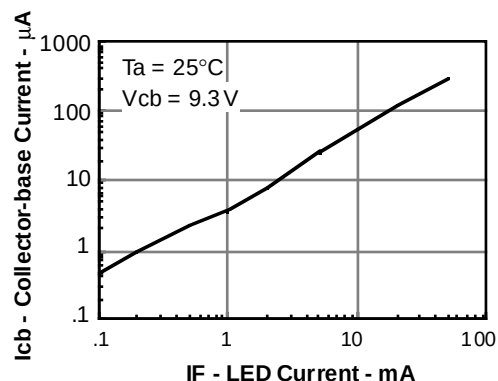


Figure 6. Collector-emitter leakage current versus temperature

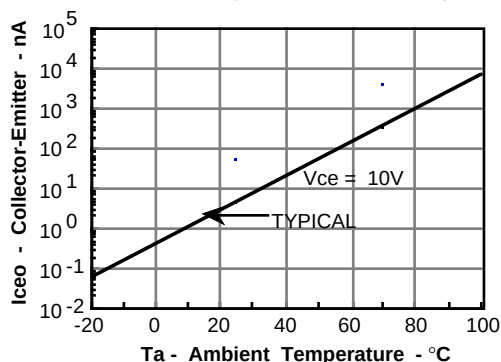


Figure 7. Normalized saturated HFE versus base current and temperature

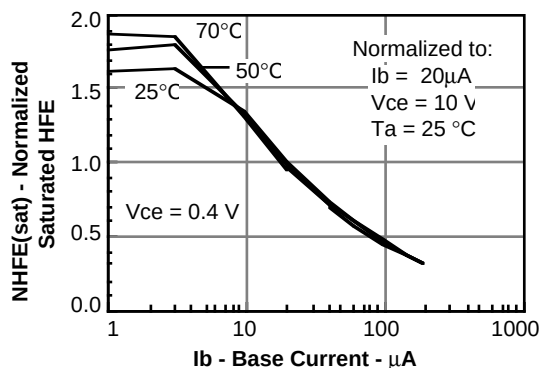


Figure 8. Normalized non-saturated and saturated CTR_{ce} versus LED current

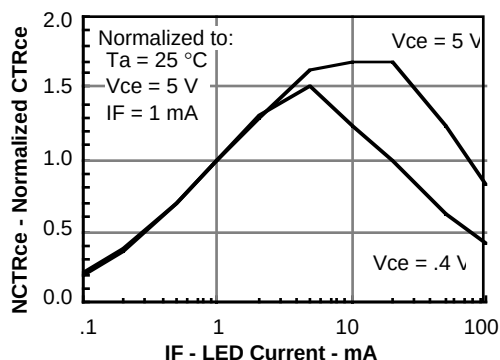


Figure 9. Normalized non-saturated and saturated collector-emitter current versus LED current

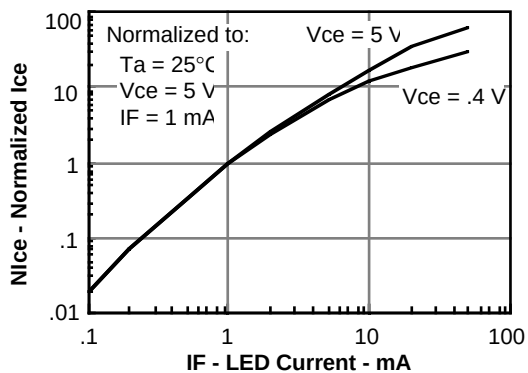


Figure 10. Normalized collector-base photocurrent versus LED current

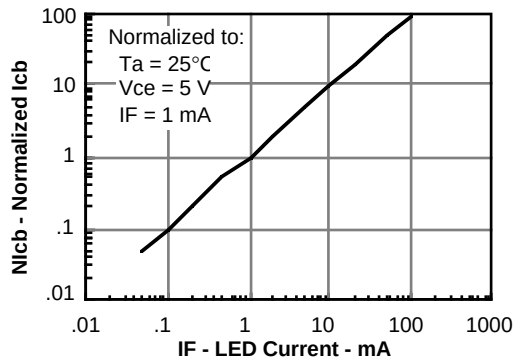


Figure 11. Collector-base photocurrent versus LED current

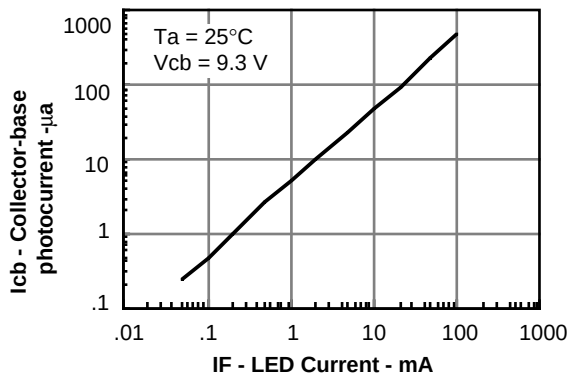


Figure 12. High to low propagation delay versus LED current and load resistor

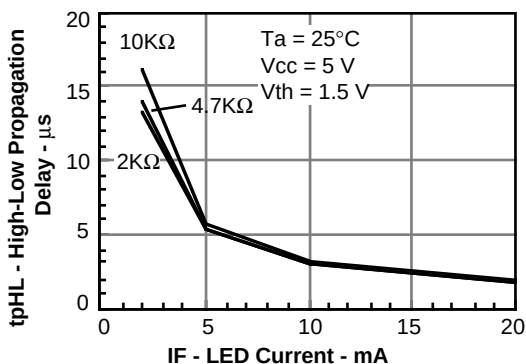


Figure 13. Low to high propagation delay versus LED current and load resistor

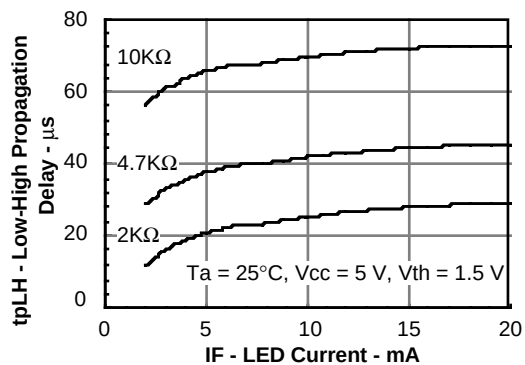


Figure 14. Normalized non-saturated HFE versus base current and temperature

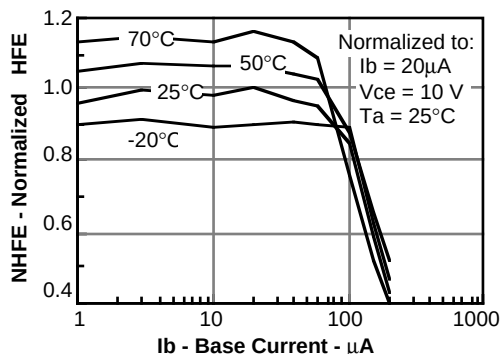


Figure 15. Typical switching characteristics versus base resistance (saturated operation)

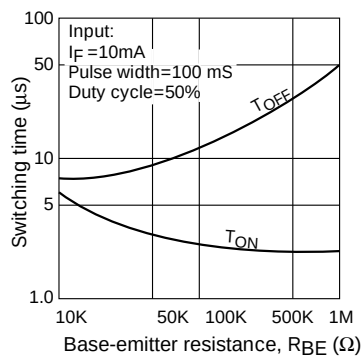


Figure 16. Typical switching times versus load resistance

