ALPHA & OMEGA SEMICONDUCTOR

AON6458

250V,14A N-Channel MOSFET

General Description

The AON6458 is fabricated using an advanced high voltage MOSFET process that is designed to deliver high levels of performance and robustness in popular AC-DC applications.By providing low $R_{DS(on)}$, C_{iss} and C_{rss} along with guaranteed avalanche capability this device can be adopted quickly into new and existing offline power supply designs.This device is ideal for boost converters and synchronous rectifiers for consumer, telecom, industrial power supplies and LED backlighting.

Product Summary

V_{DS}	300V@150℃
I_D (at V_{GS}=10V)	14A
$R_{DS(ON)}$ (at V_{GS}=10V)	< 0.17Ω

100% UIS Tested!
100% R_g Tested!

Green Product

DFN5X6

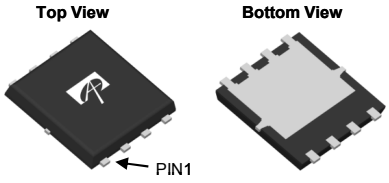





Absolute Maximum Ratings T_A=25°C unless otherwise noted

Parameter		Symbol	Maximum	Units
Drain-Source Voltage		V_{DS}	250	V
Gate-Source Voltage		V_{GS}	±30	V
Continuous Drain Current[B]	T_C=25°C	I_D	14	A
	T_C=100°C		8.8	
Pulsed Drain Current [C]		I_{DM}	42	
Continuous Drain Current	T_A=25°C	I_{DSM}	2.2	A
	T_A=70°C		1.7	
Avalanche Current [C]		I_{AR}	4.5	A
Repetitive avalanche energy [C]		E_{AR}	304	mJ
Single pulsed avalanche energy [H]		E_{AS}	608	mJ
Peak diode recovery dv/dt		dv/dt	5	V/ns
Power Dissipation [B]	T_C=25°C	P_D	83	W
	T_C=100°C		33	W
Power Dissipation [A]	T_A=25°C	P_{DSM}	2	W
	T_A=70°C		1.25	
Junction and Storage Temperature Range		T_J, T_{STG}	-50 to 150	°C

Thermal Characteristics

Parameter		Symbol	Typ	Max	Units
Maximum Junction-to-Ambient [A]	t ≤ 10s	$R_{\theta JA}$	24	30	°C/W
Maximum Junction-to-Ambient [A D]	Steady-State		53	64	°C/W
Maximum Junction-to-Case	Steady-State	$R_{\theta JC}$	1	1.5	°C/W

Electrical Characteristics (T_J=25°C unless otherwise noted)

Symbol	Parameter	Conditions	Min	Typ	Max	Units
STATIC PARAMETERS						
BV_{DSS}	Drain-Source Breakdown Voltage	I_D=250µA, V_{GS}=0V, T_J=25°C	250			V
		I_D=250µA, V_{GS}=0V, T_J=150°C		300		
BV_{DSS} /ΔTJ	Zero Gate Voltage Drain Current	ID=250µA, VGS=0V		0.25		V/°C
I_{DSS}	Zero Gate Voltage Drain Current	V_{DS}=250V, V_{GS}=0V			1	µA
		V_{DS}=200V, T_J=125°C			10	
I_{GSS}	Gate-Body leakage current	V_{DS}=0V, V_{GS}=±30V			±100	nA
$V_{GS(th)}$	Gate Threshold Voltage	V_{DS}=5V, I_D=250µA	3.2	3.8	4.5	V
$R_{DS(ON)}$	Static Drain-Source On-Resistance	V_{GS}=10V, I_D=10A		0.14	0.17	Ω
g_{FS}	Forward Transconductance	V_{DS}=40V, I_D=10A		16		S
V_{SD}	Diode Forward Voltage	I_S=1A,V_{GS}=0V		0.72	1	V
I_S	Maximum Body-Diode Continuous Current				14	A
I_{SM}	Maximum Body-Diode Pulsed Current				42	A
DYNAMIC PARAMETERS						
C_{iss}	Input Capacitance	V_{GS}=0V, V_{DS}=25V, f=1MHz	810	1028	1240	pF
C_{oss}	Output Capacitance		110	167	225	pF
C_{rss}	Reverse Transfer Capacitance		5	11	17	pF
R_g	Gate resistance	V_{GS}=0V, V_{DS}=0V, f=1MHz	1.9	3.9	5.9	Ω
SWITCHING PARAMETERS						
Q_g	Total Gate Charge	V_{GS}=10V, V_{DS}=200V, I_D=10A	17	22	27	nC
Q_{gs}	Gate Source Charge			6.3		nC
Q_{gd}	Gate Drain Charge			8		nC
$t_{D(on)}$	Turn-On DelayTime	V_{GS}=10V, V_{DS}=125V, I_D=10A, R_G=25Ω		28		ns
t_r	Turn-On Rise Time			57		ns
$t_{D(off)}$	Turn-Off DelayTime			65		ns
t_f	Turn-Off Fall Time			40		ns
t_{rr}	Body Diode Reverse Recovery Time	I_F=10A,dI/dt=100A/µs,V_{DS}=100V	125	158	190	ns
Q_{rr}	Body Diode Reverse Recovery Charge	I_F=10A,dI/dt=100A/µs,V_{DS}=100V	0.8	1	1.2	µC

A. The value of $R_{\theta JA}$ is measured with the device mounted on 1 in² FR-4 board with 2oz. Copper, in a still air environment with T_A=25° C. The Power Dissipation P_{DSM} is based on $R_{\theta JA}$ t ≤ 10s value and the maximum allowed junction temperature of 150° C. The value in any given application depends on the user's specific board design.

B. The power dissipation PD is based on $T_{J(MAX)}$=150° C, using junction-to-case thermal resistance, and is more useful in setting the upper dissipation limit for cases where additional heatsinking is used.

C. Repetitive rating, pulse width limited by junction temperature $T_{J(MAX)}$=150° C. Ratings are based on low frequency and duty cycles to keep initial T_J =25° C.

D. The $R_{\theta JA}$ is the sum of the thermal impedance from junction to case $R_{\theta JC}$ and case to ambient.

E. The static characteristics in Figures 1 to 6 are obtained using <300µs pulses, duty cycle 0.5% max.

F. These curves are based on the junction-to-case thermal impedance which is measured with the device mounted to a large heatsink, assuming a maximum junction temperature of $T_{J(MAX)}$=150° C. The SOA curve provides a single pulse rating.

G.These tests are performed with the device mounted on 1 in² FR-4 board with 2oz. Copper, in a still air environment with T_A=25° C.

H. L=60mH, I_{AS}=4.5A, V_{DD}=150V, R_G=25Ω, Starting T_J=25° C.

THIS PRODUCT HAS BEEN DESIGNED AND QUALIFIED FOR THE CONSUMER MARKET. APPLICATIONS OR USES AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS ARE NOT AUTHORIZED. AOS DOES NOT ASSUME ANY LIABILITY ARISING OUT OF SUCH APPLICATIONS OR USES OF ITS PRODUCTS. AOS RESERVES THE RIGHT TO IMPROVE PRODUCT DESIGN, FUNCTIONS AND RELIABILITY WITHOUT NOTICE.

TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

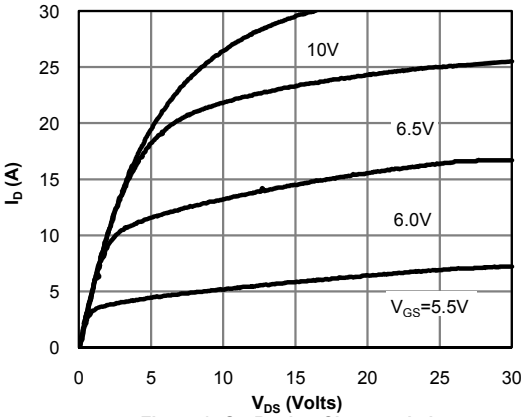

Figure 1: On-Region Characteristics

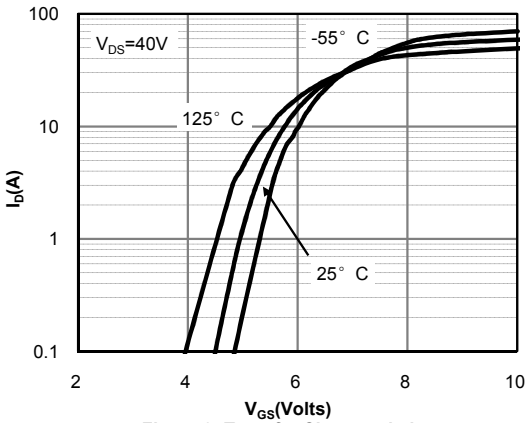

Figure 2: Transfer Characteristics

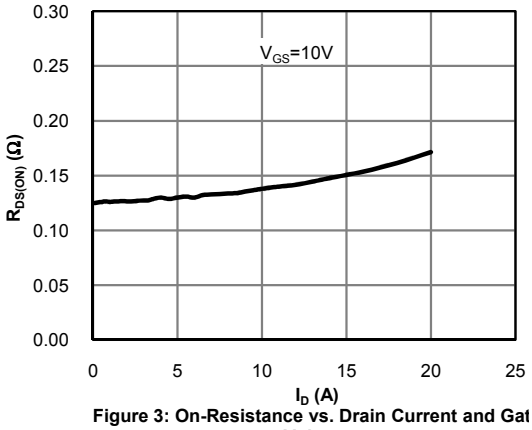

Figure 3: On-Resistance vs. Drain Current and Gat Voltage

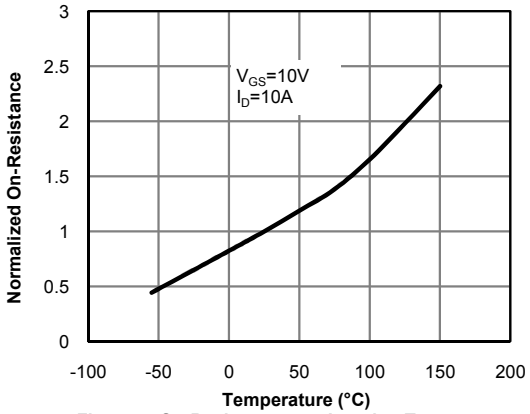

Figure 4: On-Resistance vs. Junction Temperature

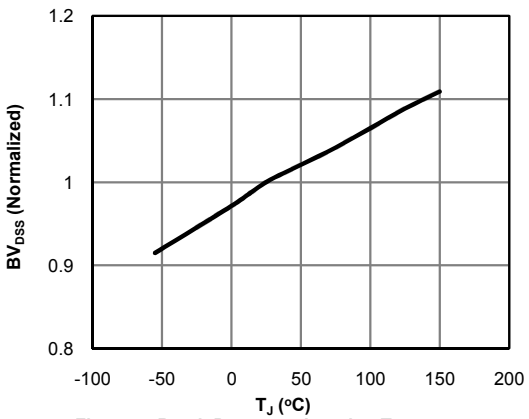

Figure 5: Break Down vs. Junction Temperature

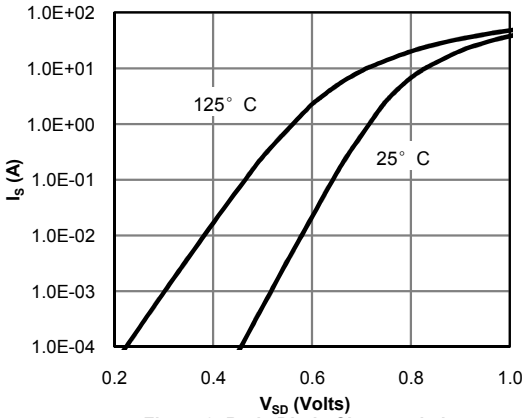

Figure 6: Body-Diode Characteristics

TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

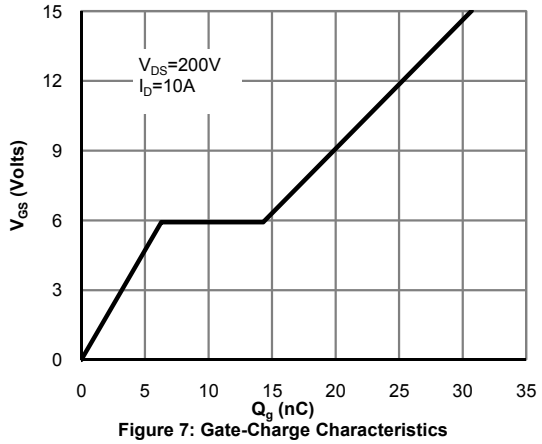

Figure 7: Gate-Charge Characteristics

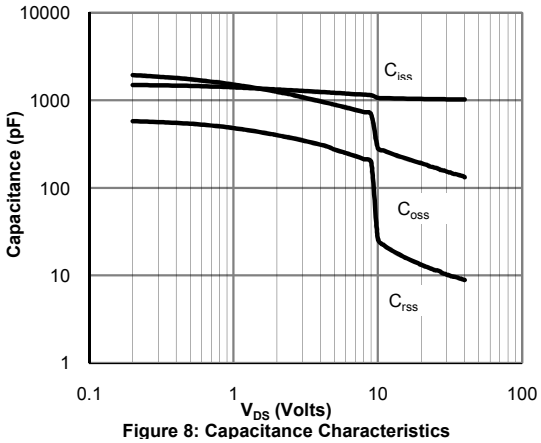

Figure 8: Capacitance Characteristics

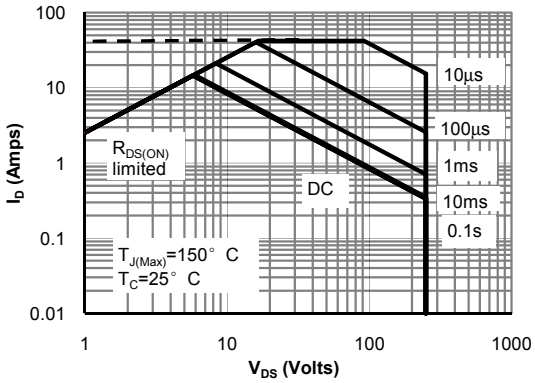

Figure 9: Maximum Forward Biased Safe Operating Area (Note F)

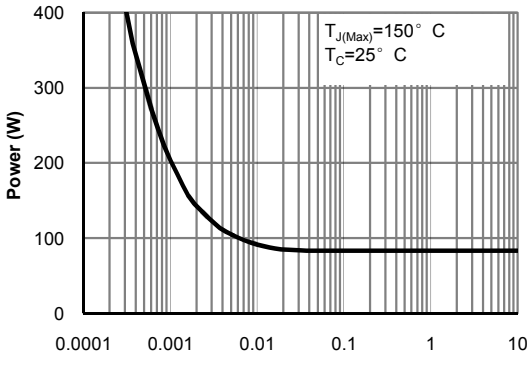

Figure 10: Single Pulse Power Rating Junction-to-Case (Note F)

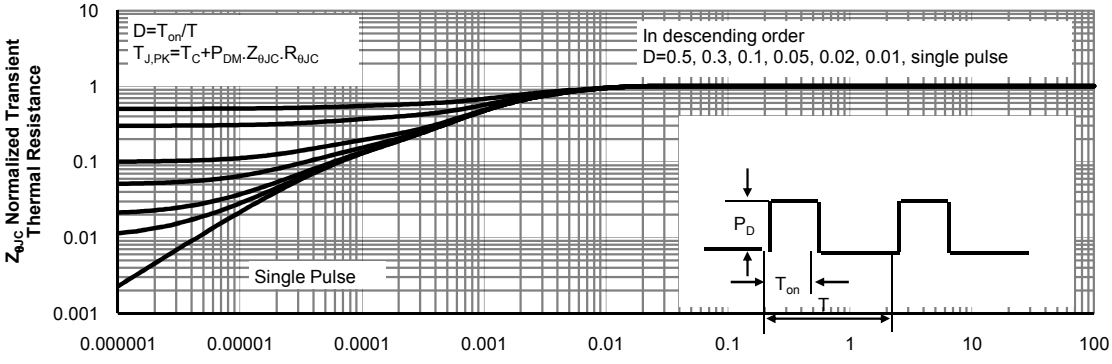

Figure 11: Normalized Maximum Transient Thermal Impedance (Note F)

TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

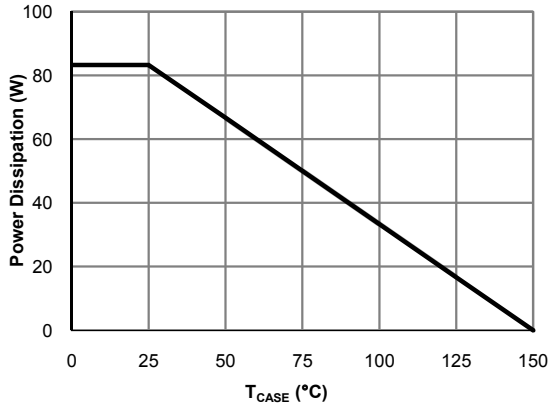

Figure 12: Power De-rating (Note B)

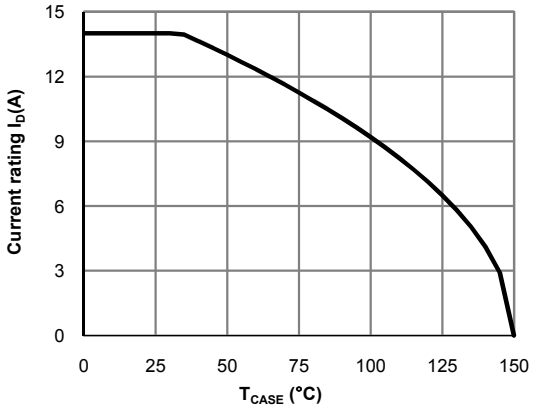

Figure 13: Current De-rating (Note B)

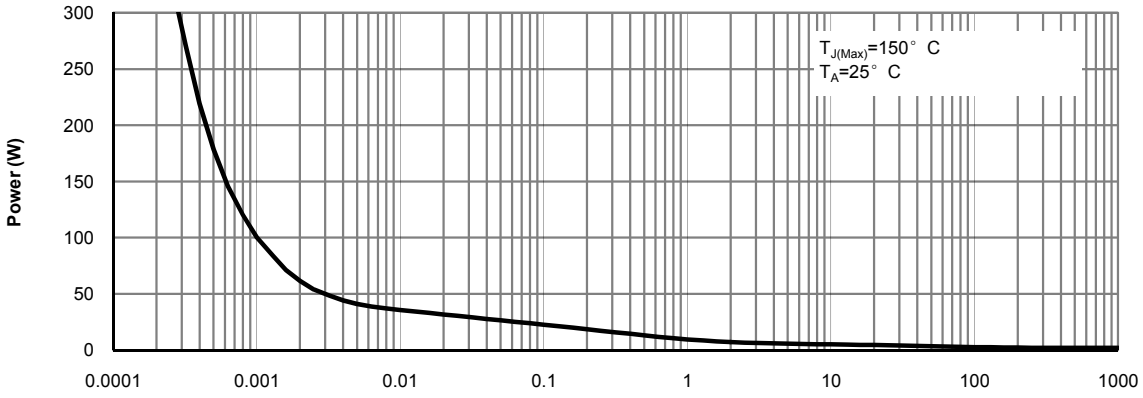

Figure 14: Single Pulse Power Rating Junction-to-Ambient (Note G)

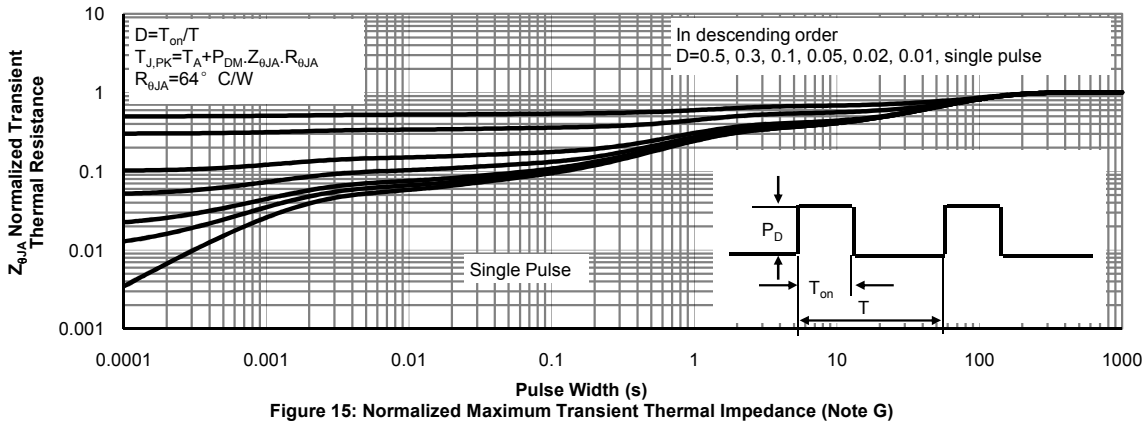

Figure 15: Normalized Maximum Transient Thermal Impedance (Note G)

Gate Charge Test Circuit & Waveform

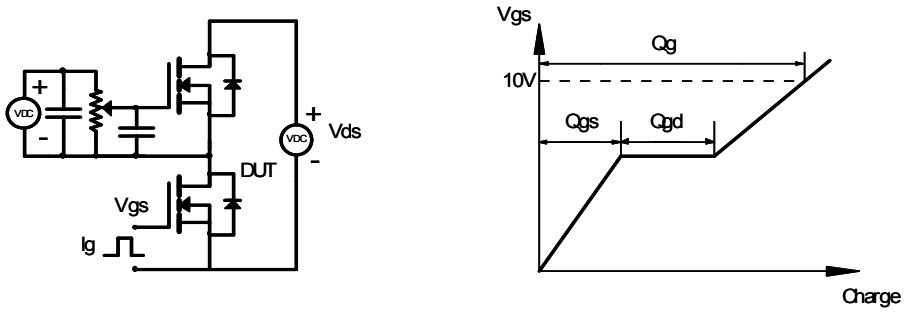

Resistive Switching Test Circuit & Waveforms

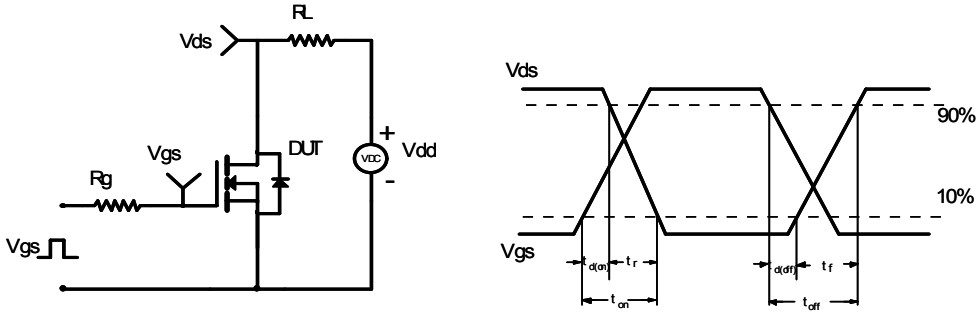

Unclamped Inductive Switching (UIS) Test Circuit & Waveforms

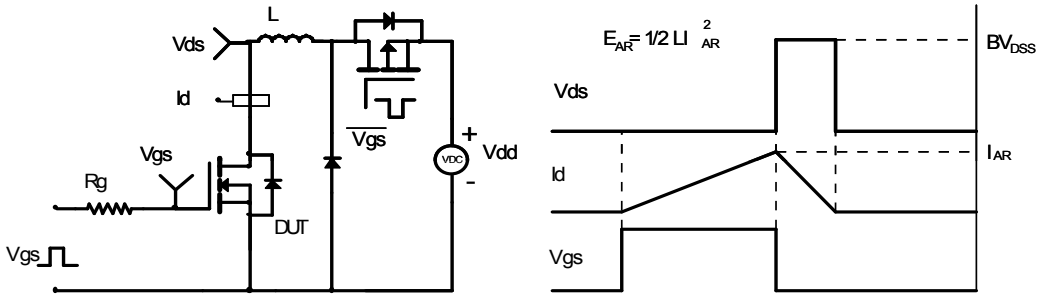
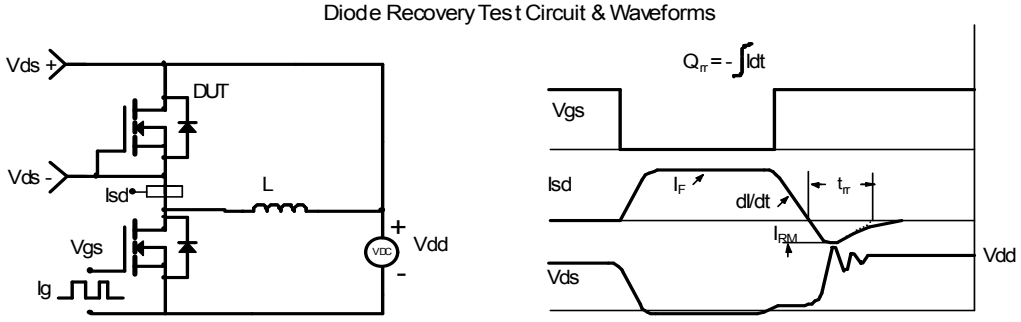
Diode Recovery Test Circuit & Waveforms