




Dimensions

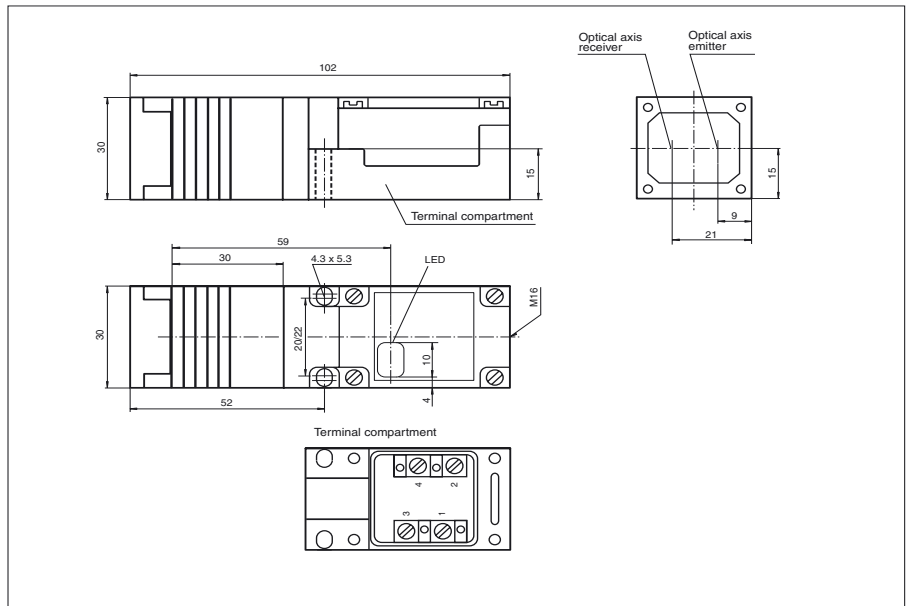

Model Number


OCS2000-M1K-N2

NAMUR retroreflective sensor, special design, 2 m detection range, red light, light/dark on, DC version, NAMUR output, terminal compartment

Features

- ATEX-, IECEx approval for zone 20 (Dust) and zone 1 (Gas)
- Intrinsically safe, Ex op is ia IIC T6 Gb/IIIC T 135 °C Da
- Glare protected with polarization filter
- Adjustable sensor head
- Scratch resistant mineral glass lens

Electrical connection

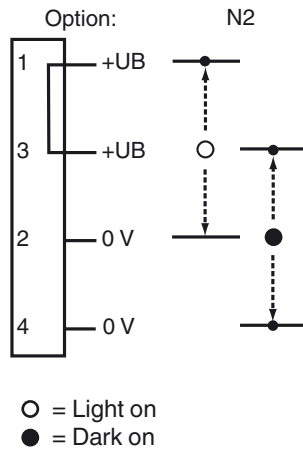

Release date: 2019-11-27 14:20 Date of issue: 2019-11-27 106529_eng.xml

Technical data**General specifications**

Effective detection range	0 ... 2 m
Reflector distance	100 ... 2000 mm
Threshold detection range	2 m
Reference target	Retro-reflector C110-2
Light source	LED , 660 nm
Light type	modulated visible red light
Polarization filter	yes
Ambient light limit	≤ 10000 Lux sun light ≤ 7500 Lux halogen light

Functional safety related parameters

MTTF _d	1319 a
Mission Time (T _M)	20 a
Diagnostic Coverage (DC)	0 %

Indicators/operating means

Function indicator	LED yellow: switching state
--------------------	-----------------------------

Electrical specifications

Operating voltage	U _B	6 ... 20 V DC (R _i approx. 0 Ohm)
Ripple		5 %
Time delay before availability	t _v	20 ms

Output

Switching type	light/dark on, programmable	
Signal output	1 NAMUR output NC/NO programmable	
Switching voltage	8 V DC (R _i approx. 1 kΩ)	
Switching frequency	f	≤ 100 Hz

Current consumption

Reference target detected	connection 1, 2: ≥ 2.2 mA connection 1, 4: ≤ 1 mA
Reference target not detected	connection 1, 2: ≤ 1 mA connection 1, 4: ≥ 2.2 mA

Response time	5 ms
---------------	------

Conformity

Product standard	EN 60947-5-2
------------------	--------------

Ambient conditions

Ambient temperature	-25 ... 70 °C (-13 ... 158 °F)
Storage temperature	-40 ... 80 °C (-40 ... 176 °F)

Mechanical specifications

Housing width	30 mm
Housing height	30 mm
Housing depth	102 mm
Degree of protection	IP67 according to EN 60529, Class II insulation
Connection	M16 nspterminal compartment, core cross section ≤ 2.5 mm ²
Material	
Housing	PBT
Optical face	Scratch resistant mineral glass lens
Mass	100 g

Compliance with standards and directives

Standard conformity	
Standards	EN 60947-5-6:2000

Approvals and certificates**FM approval**

Approved for	IS / I,II,III / 1 / ABCDEFG / T5 - 116-0110; Entity NI / I / 2 / ABCD / T6 Entity Parameters: VMax = 12.6 V, IMax = 20 mA, Ci = 1.11 µF, Li = 0 mH (Groups A, B, C, D, E, F, G). VMax = 15.5 V, IMax = 52 mA, Ci = 1.11 µF, Li = 0 mH (Groups C, D, E, F, G).
--------------	---



CSA approval

Approved for	Class I, Division 2, Groups A, B, C and D Rated 20V (max), 50mA. These sensors are suitable for installation in (or through the wall of) a suitable enclosure with provision for connection of rigid metal conduit, as acceptable to the local inspection authority having jurisdiction.
--------------	--

CCC approval

CCC approval / marking not required for products rated ≤36 V

Curves / Diagrams

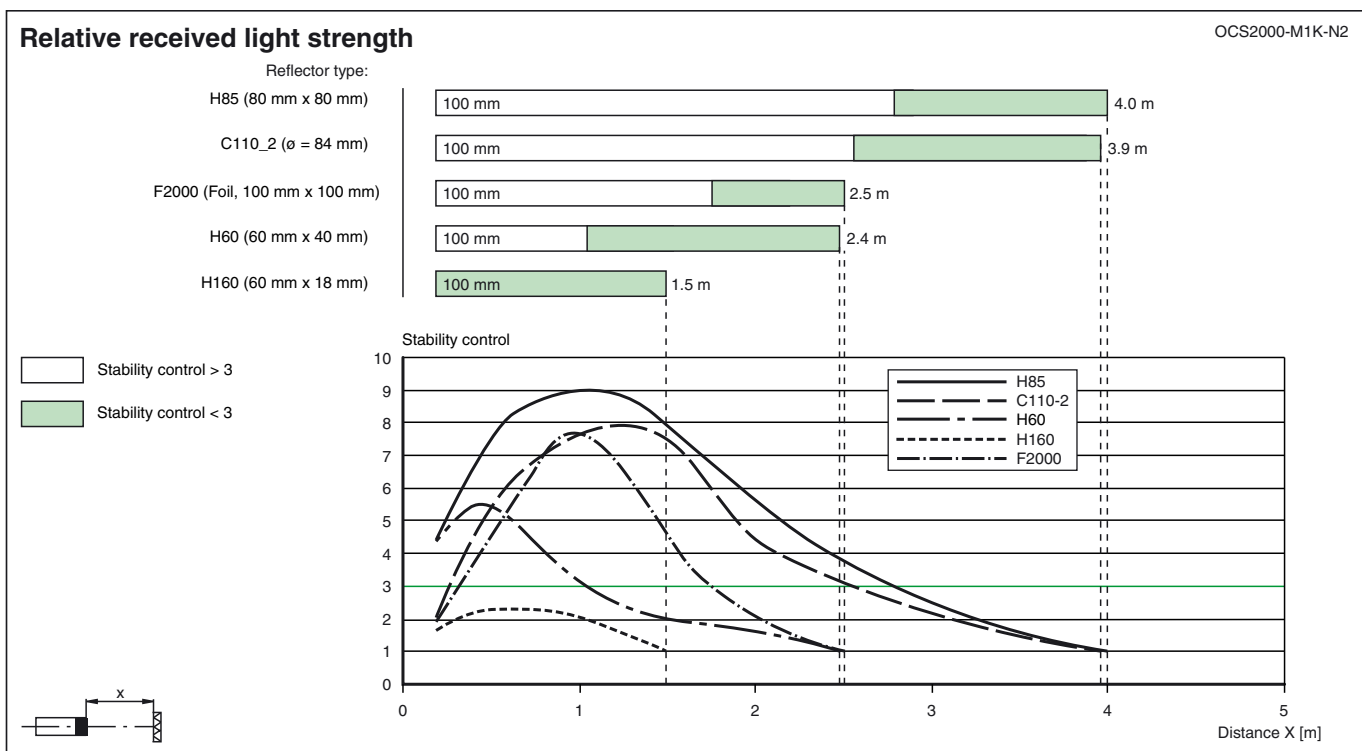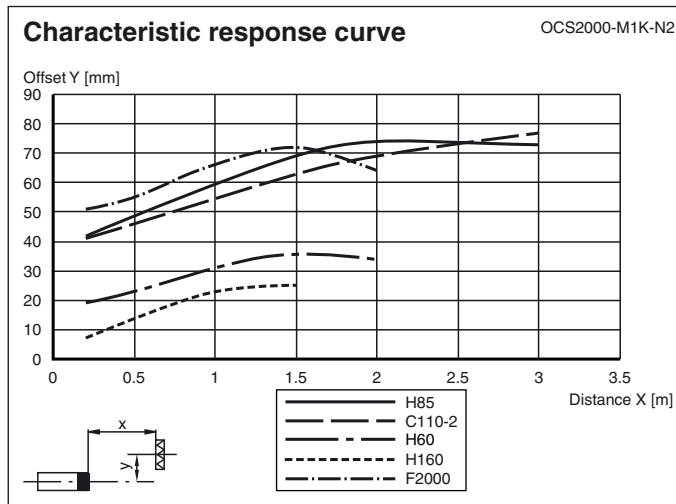

Release date: 2019-11-27 14:20 Date of issue: 2019-11-27 106529_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 4411
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com