








S-03


受控文件

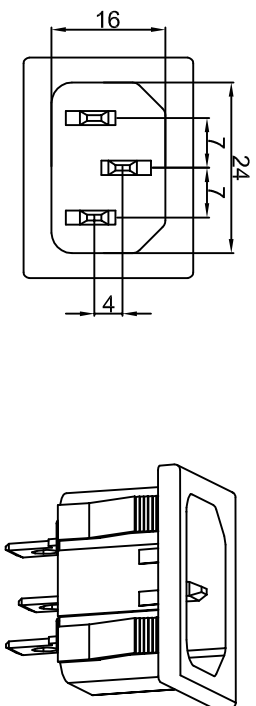


Rating: 15A 250V AC (UL CUL) 
 10A 250V AC (VDE CCC) 
 Insulation Resistance: DC 500V 100M Ω Min.
 Dielectric Strength: AC2000V 1 minute.
 Operating Temperature: -10 °C~+70 °C;
 MATERIAL:
 Body:Nylon66
 Terminal:Brass,Silver or Tin plated

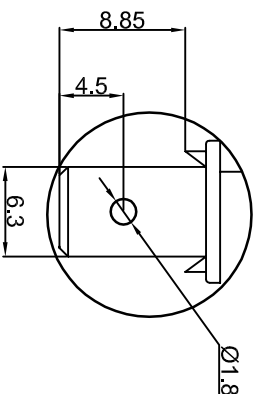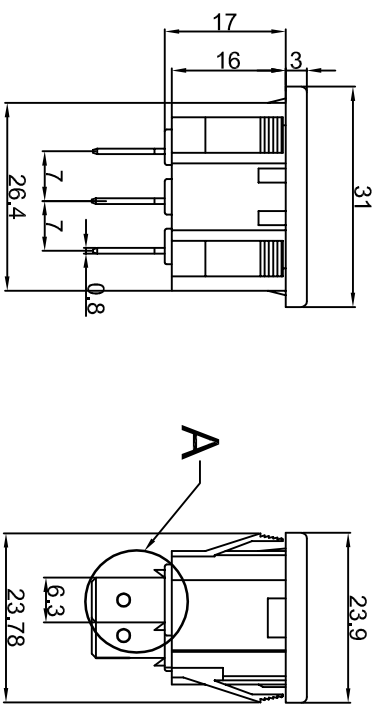

SACLE 2:1



CUT-OUT



公差 TOLERANCES		X± 0.3		XX± 0.15		角度 ANGLE ± 1°		单位 DIMENSION UNIT mm.	
版本 VERSION		A1		NONE		日期 DATE		品名 TITLE	
2009.09.04		2008.07.08		2008.07.08		S-03-12-2		图号 DRAWING NO	
A1 图纸重新整理发行		A0 New Issue		S-03-12-2_A1					
版本 VER.		变更说明 CHANGE DESCRIPTION		日期 DATE		ECN NO.			
		2008.07.08							
		核准 APPROVED BY		李新超		核对 CHECKED BY		李伟奇	
		日期 DATE		2008.07.08		绘图 DRAWN BY		姜庆勇	