




- LL: 0.5μH Max @ 100KHz, 0.2V
- DCR: 1.4Ω Max
- Operating Temp: 0°C to +70°C

Electrical Specifications @ 25°C								
Part Number	OCL(μH Min) @ 100kHz, 0.2V	Turns Ratio chip: cable (±5%)	Insertion Loss (dB Max)	Return Loss (dB Min)				
	With 8mA DC Bias			1-100MHz	1-30MHz	40MHz	50MHz	60-80MHz
AGTA-8801S	350	1CT:1CT	-1.0	-18	-14.4	-13.1	-12	-10

Electrical Specifications @ 25°C					
Part Number	Common Mode Rejection (dB Min)			Cross Talk (dB Min)	Isolation HI-POT (Vrms) 60S
	0.3-30MHz	60MHz	100MHz	1-100MHz	
AGTA-8801S	-40	-35	-30	-30	1500

All specifications subject to change without notice.

### MECHANICAL

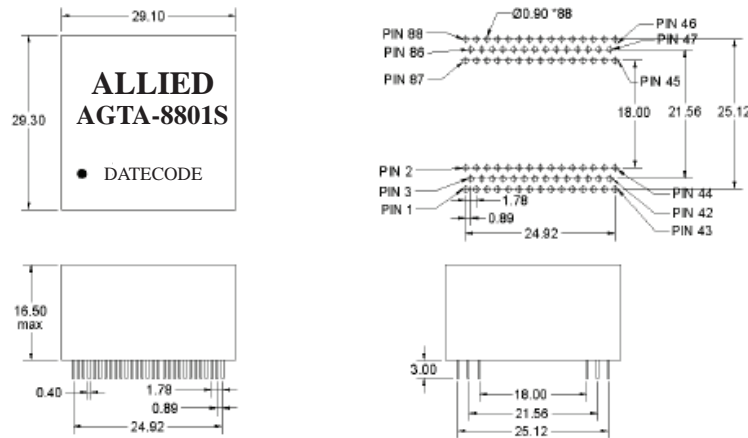

Dimensions: mm  
Unless otherwise specified, all tolerances are ± 0.25

### SCHEMATICS

