
KEMET Part Number: R413N310040M1M

Capacitor, film, 0.1 uF, +/-20% Tol, -40/+110C, Safety:X1/Y2, 300 VAC, Lead Spacing=22.5 mm

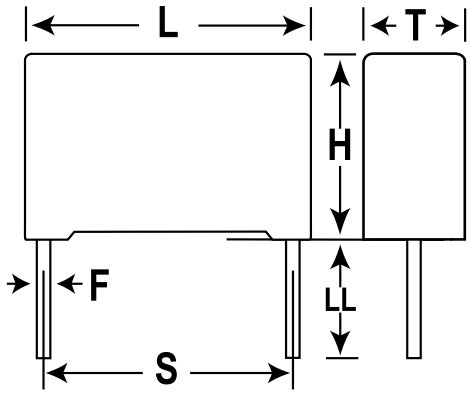

General Information	
Supplier:	KEMET
Dielectric:	Metallized Polypropylene
Application:	Safety:X1/Y2
Sub Application:	AEC-Q200
Style:	Radial Box
Lead Form:	Wire Leads
Approvals:	ENEC,UL,cUL,CQC
RoHS:	Yes

Dimensions (mm)		
Symbol	**Dimension**	**Tolerance**
L	26.5	+0.3
H	17	+0.1
T	8.5	+0.2
S	22.5	+/-0.4
LL	30	+5/-0
F	0.8	+/-0.05

Specifications	
Capacitance:	0.1 uF
Voltage:	1000 VDC
Tolerance:	+/-20%
Voltage AC:	300 VAC
Rated Temperature:	110C
Temperature Range:	-40/+110C
Dissipation Factor @ 1 kHz:	0.3%
Insulation Resistance:	100 GOhm
Maximum dVdT:	500 v/us

Notes:
-L,H,T are nominal dimensions and do not imply a minimum.

Packaging Specifications	
Package Kind:	Bulk
Package Quantity:	300

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.

© 2006-2015 IntelliData.net