
Sound Enhancement Audio Processor for Compression Audio

■GENERAL DESCRIPTION

The NJM2708 is a sound enhancement audio processor designed for compression audio. It includes mode control switch (sound enhancement mode / Bypass mode), standby function and realizes low consumption power design by standby function.

It is suitable for portable audio, car audio & home audio applications.

●PACKAGE OUTLINE

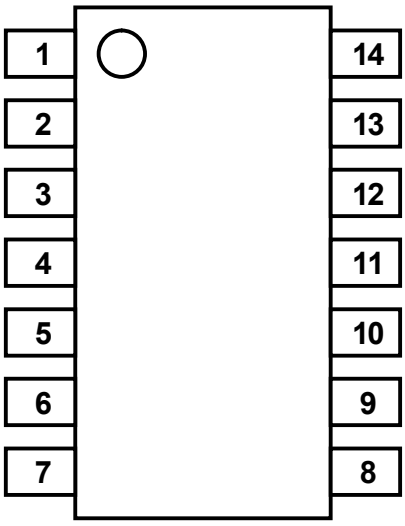


NJM2708V

■FEATURES

- Operating Voltage +1.8 to +13 V
- Low Operating Circuit 0.75 mA typ.(at Sound enhancement mode VR: Max.)
  0.1μA typ. (at Standby mode)
- Low output noise -100dBV typ.(at Sound enhancement mode VR: Max.)
- Low THD 0.005% typ.
- Variable Surround Effect by external resistor
- Standby function
- Internal Mode Control Switch
- Bipolar Technology
- Package Outline SSOP14

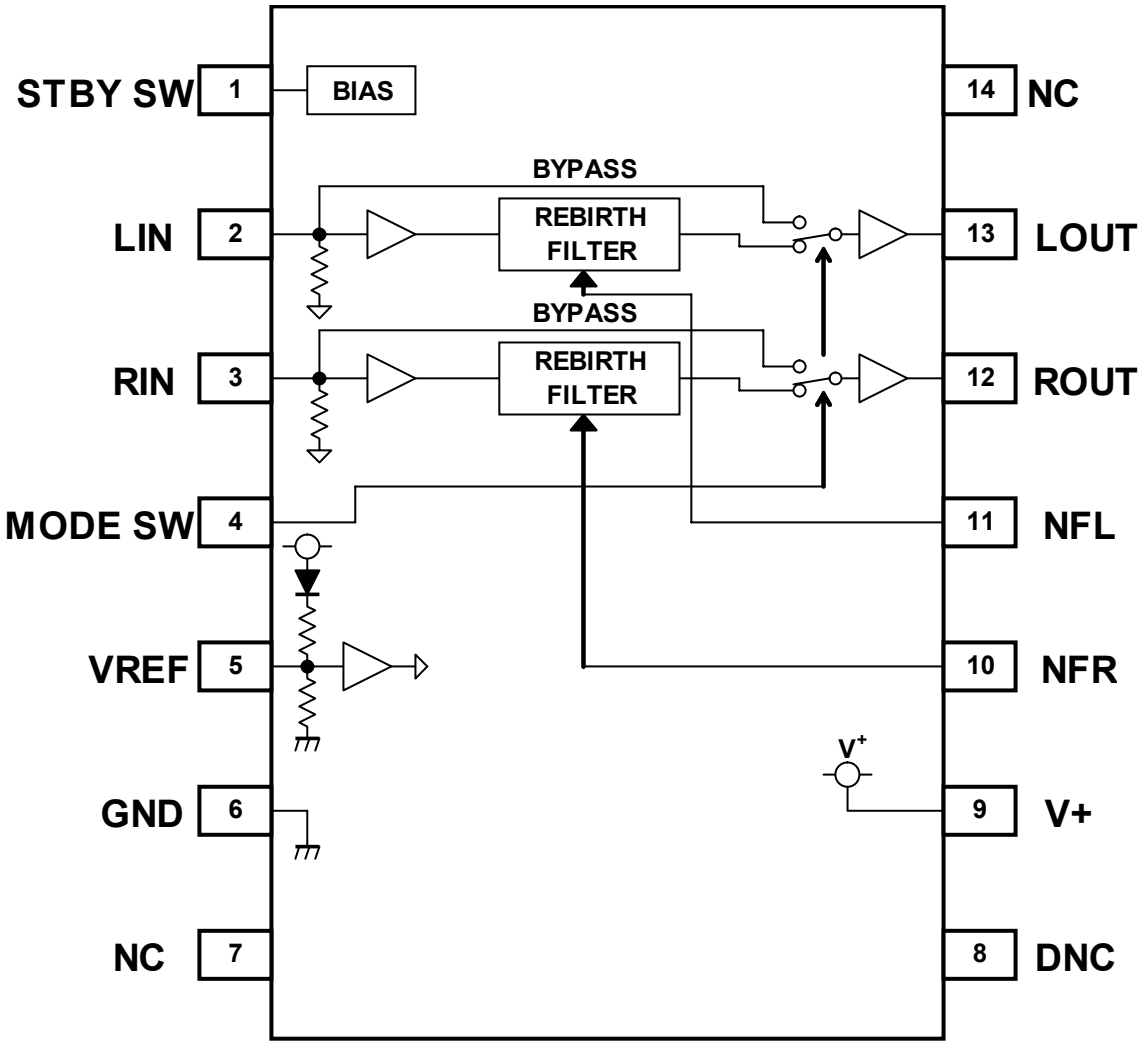
■PIN CONFIGURATION



(SSOP14)

1. STANDBY SW
2. LIN
3. RIN
4. MODE SW
5. VREF
6. GND
7. NC
8. DNC
9. V+
10. NFR
11. NFL
12. ROUT
13. LOUT
14. NC

■BLOCK DIAGRAM (SSOP14)



■**ABSOLUTE MAXIMUM RATING** (Ta=25°C)

PARAMETER	SYMBOL	RATING	UNIT
Power Supply Voltage	V_+	14	V
Power Dissipation	P_D	400 NOTE: EIA/JEDEC STANDARD Test board (76.2x114.3x1.6mm, 2layer, FR-4) mounting	mW
Operating Temperature Range	Topr	-40 ~ +85	°C
Storage Temperature Range	Tstg	-40 ~ +125	°C

■**OPERATING VOLTAGE**

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Operating Voltage	V_+		1.8	9.0	13	V

■**ELECTRICAL CHARACTERISTICS** (Ta=25°C, V^+=9V, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITION	INPUT L	INPUT R	OUTPUT	Mode	VR	MIN	TYP	MAX	UNIT
Supply Current	I_{CC}	No Signal	0	0	-	Active	-	-	750	1300	μA
			0	0	-	Standby	-	-	0.1	1.0	
			0	0	-	eala Rebirth	Max	-	750	1300	
Reference Voltage	V_{REF}	No Signal	0	0	-	-	-	3.65	4.15	4.65	V

■**AC CHARACTERISTICS** (Ta=25°C, V^+=9V, Vin= 1.5Vrms,f=1kHz,R_L=10kΩ,unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITION	INPUT L	INPUT R	OUTPUT	Mode	VR	MIN	TYP	MAX	UNIT
Maximum Input Voltage	V_{IM}	f=1kHz THD=1%	V_{IN}	-	L	Bypass	-	2.2	3.0	-	Vrms
			-	V_{IN}	R						
		f=1kHz THD=1%	V_{IN}	-	L	eala Rebirth	MAX	1.5	2.7	-	
			-	V_{IN}	R						
		f=10kHz THD=1%	V_{IN}	-	L	Bypass	-	2.2	3.0	-	
			-	V_{IN}	R						
		f=10kHz THD=1%	V_{IN}	-	L	eala Rebirth	MAX	1.0	1.6	-	
			-	V_{IN}	R						
Output Noise	V_{NO}	Rg=0Ω A-Weighted	0	0	L	Bypass	-	-	-112 (2.5)	-106 (5.0)	dBV (μVrms)
					R						
		Rg=0Ω A-Weighted	0	0	L	eala Rebirth	MAX	-	-100 (10)	-94 (20)	
					R						
Total Harmonic Distortion	THD+N	V_{IN}=1.5Vrms f=1kHz	V_{IN}	-	L	Bypass	-	-	0.002	0.01	%
			-	V_{IN}	R						
		V_{IN}=0.75Vrms f=10kHz	V_{IN}	-	L	eala Rebirth	MAX	-	0.1	-	
			-	V_{IN}	R						

PARAMETER	SYMBOL	TEST CONDITION						MIN	TYP	MAX	UNIT
			INPUT		OUTPUT	Mode	VR				
			L	R							
Bypass Gain	G_{VBYP}	V_{IN}=1.5Vrms f=1kHz	V_{IN}	-	L	Bypass	-	-1.0	0.0	1.0	dB
			-	V_{IN}	R						
eala Rebirth Gain	G_{eala}	V_{IN}=0.75Vrms f=10kHz	V_{IN}	-	L	eala Rebirth	MAX	3.0	5.0	7.0	dB
			-	V_{IN}	R						

■CONTROL CHARACTERISTICS (Ta=25°C, V^+=9V, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Mode Select Control Voltage	V_{MODE}	V_{IN}=High Level	1.2	-	V^+	V
		V_{IN}=Low Level	0.0	-	0.3	V

■SWITCH FUNCTION

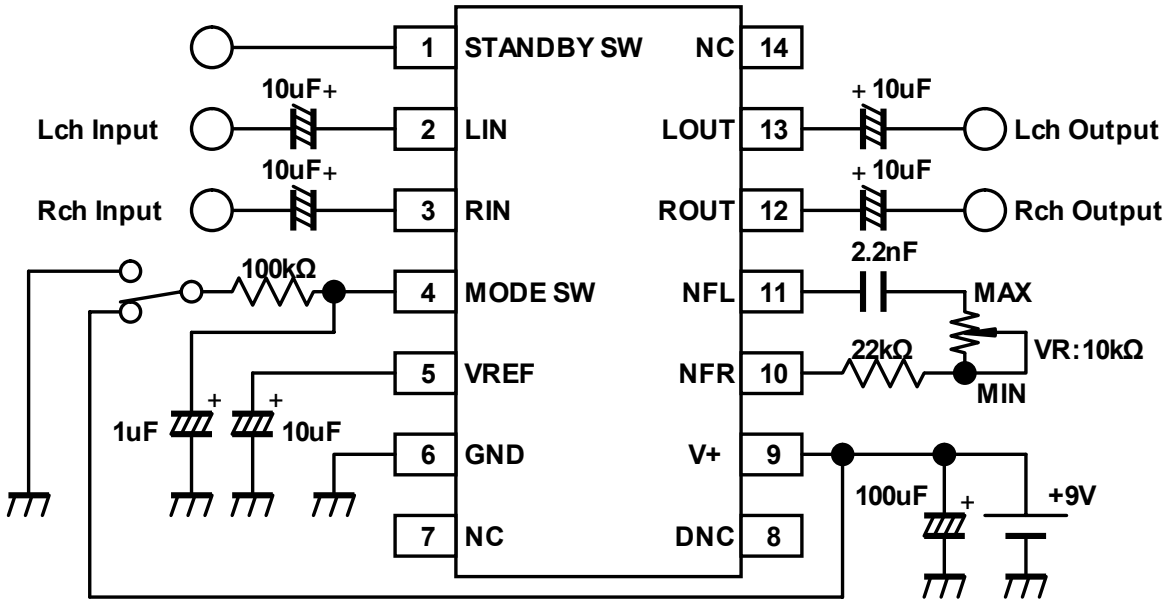
MODE SW

MODE	SW	NOTES
Bypass	L, open	Input Through
eala Rebirth	H	eala Rebirth(Stereo Input)

STANDBY SW

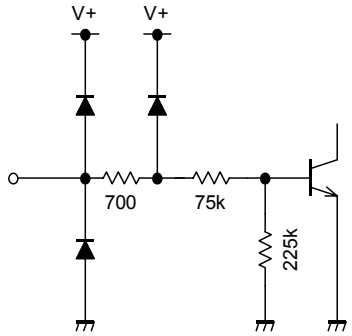
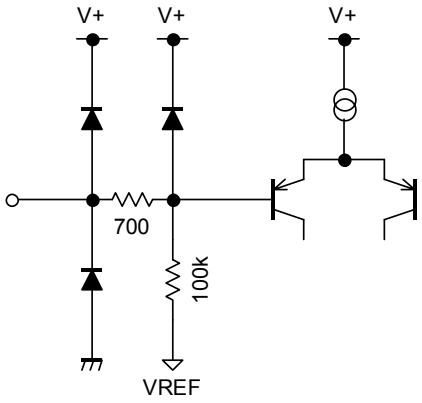
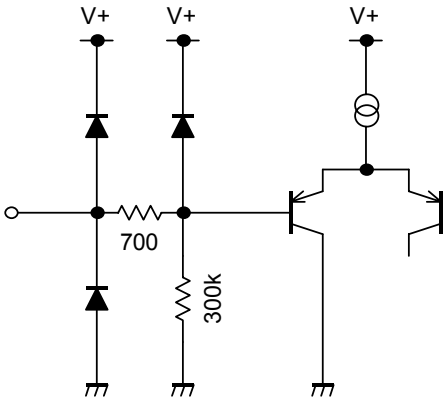
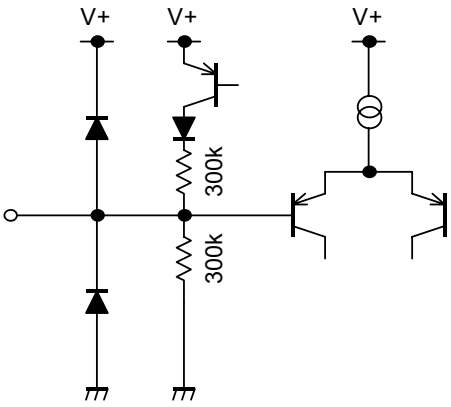
MODE	SW	NOTES
Standby	L, open	IC is non-active
Active	H	IC is active

■ APPLICATION CIRCUIT



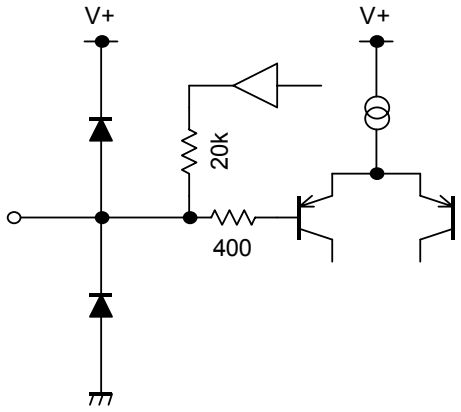
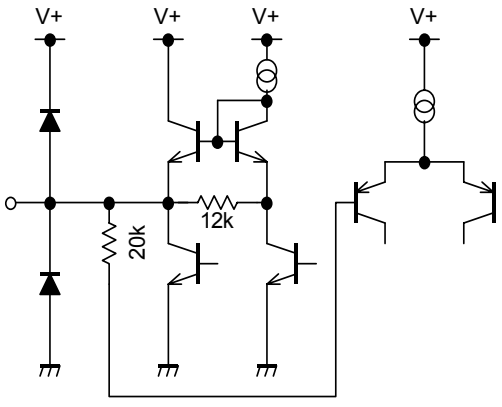
■ **TERMINAL DESCRIPTION**

(Ta=25°C, V^+=9V)

PIN No.	SYMBOL	FUNCTION	EQUIVALENT CIRCUIT	Voltage
1	STANDBY SW	Standby Switch		0V
2 3	LIN RIN	Lch Input Rch Input		4.15V
4	MODE SW	Mode Control Switch		0V
5	VREF	Reference Voltage		4.15V

■ **TERMINAL DESCRIPTION**

(Ta=25°C, V^+=9V)

PIN No.	SYMBOL	FUNCTION	EQUIVALENT CIRCUIT	Voltage
7 14	NC	No Connect	———	-
8	DNC	Do Not Connect	———	-
9	V+	Power Supply	———	V+
10 11	NFR NFL	Rch Filter Terminal Lch Filter Terminal		4.15V
12 13	ROUT LOUT	Rch Output Lch Output		4.15V

[CAUTION]
The specifications on this databook are only given for information , without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.