
Vertical Cavity Surface Emitting Laser in TO-46 Package

OPV314, OPV314Y

Technical Data

Features

- 850nm VCSEL Technology
- Data rates up to 2.5 Gbps
- High thermal stability
- Low drive current/high output density
- Narrow and concentric beam angle
- Recommended for multimode fiber applications
- TO-46 package with microbead lens
- Burned in for communication level reliability
- Monitor photodiode



Description

The OPV314 is a high performance 850nm VCSEL packaged for high speed communication links. OPV314 combines all the performance advantages of a VCSEL with the addition of a power monitor diode for precise control of optical power.

The OPV314Y is identical electrically and optically and differs only in pin out. Refer to mechanical drawings for details.

Features including high speed, high output power and concentric beam makes it an ideal transmitter for integration into all types of data communications equipment.

Applications include:

- Fibre Channel
- Gigabit Ethernet
- ATM
- VSR
- Intra-system links
- Optical backplane interconnects.

Absolute Maximum Ratings (T_A = 25° C unless otherwise noted)

Storage Temperature	-40° C to +100° C
Operating Temperature	0° C to +70° C
Soldering Lead Temperature	260° C for 10 Seconds
Maximum Forward Peak Current	20 mA
Maximum Reverse Voltage	10 V
Max. Continuous Optical Power at 70°C	1.1 mW



Additional laser safety information can be found on the Optek website. See application #221. Classification is not marked on the device due to space limitations. See package outline for centerline of optical radiance. Operating devices beyond maximum rating may cause devices to exceed rated classification

September 2003
Issue 3.3

Electrical/Optical Characteristics (at 25 °C unless otherwise specified)

SYMBOL	PARAMETER	MIN	TYP	MAX	UNITS	TEST CONDITION
P_{OT}	Total Power Out	1.40			mW	I_F = 7 mA
I_{TH}	Threshold Current	0.80		3.00	mA	Note1
V_F	Forward Voltage	1.60		2.20	V	I_F = 7 mA
I_R	Reverse Current			35	nA	V_R = 5 V
R_S	Series Resistance	20		55	ohms	Note 2
η	Slope Efficiency	0.28		0.60	mW/mA	Note 3
	Linearity	0.00				Note 4
λ	Wavelength	840	850	860	nm	
$\Delta\lambda$	Optical Bandwidth			0.85	nm	
t_r/t_f	Rise and Fall Time		100		ps	20% to 80%
N_{RI}	Relative Intensity Noise		-123		db/Hz	
$\Delta I_{TH}/\Delta T$	Temp Coefficient of Threshold Current		±1.0		mA	0° - 70° C, Note 1
$\Delta\lambda/\Delta T$	Temp Coefficient of Wavelength		0.06		%/°C	0° - 70° C, I_F = 7 mA
$\Delta V_F \Delta T$	Temperature Coefficient for VF		-2.5		mV/°C	0° - 70° C, I_F = 7 mA
$\Delta\eta/\Delta T$	Temperature Coefficient for Efficiency		-0.5		%/C	0° - 70° C, Note 3


Photodiode Electrical Characteristics (at 25 °C unless otherwise specified)

SYMBOL	PARAMETER	MIN	TYP	MAX	UNITS	TEST CONDITION
I_{RPD}	Reverse Current, photo diode			30	nA	V_R = 5 V
I_{M1}	Monitor Current	40			µA	I_F = 7 mA, V_R = 5 V
I_{M2}	Monitor Current	45			µA	P_O = 2 mW, V_R = 5 V

NOTES:
(1) Threshold Current is based on the two line intersection method specified in Telcordia GR-468-Core. Line 1 from 4 mA to 6 mA. Line 2 from 0 mA to 0.5 mA.
(2) Series Resistance is the slope of the Voltage-Current line from 5 to 8 mA.
(3) Slope efficiency, is the slope of the best fit LI line from 5 mA to 8 mA using no larger than .25 mA test interval points.
(4) Using data points taken for slope efficiency above, delta L/delta I shall be calculated for each adjacent pair of points.

Optek reserves the right to make changes at any time, without notice, in order to improve design and provide the best product possible.


Normalized Output Power vs. Forward Current

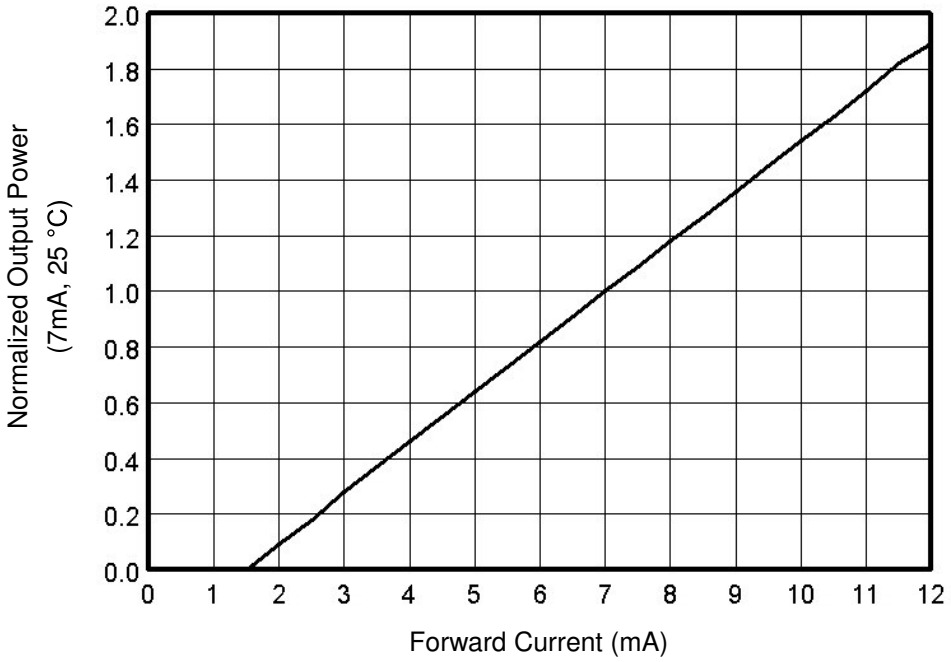


Optek reserves the right to make changes at any time, without notice, in order to improve design and provide the best product possible.


Optek Technology, Inc. Carrollton, Texas 75006 (972) 323-2200 sensor@optekinc.com www.optekinc.com


OPV314, OPV314Y Technical Data

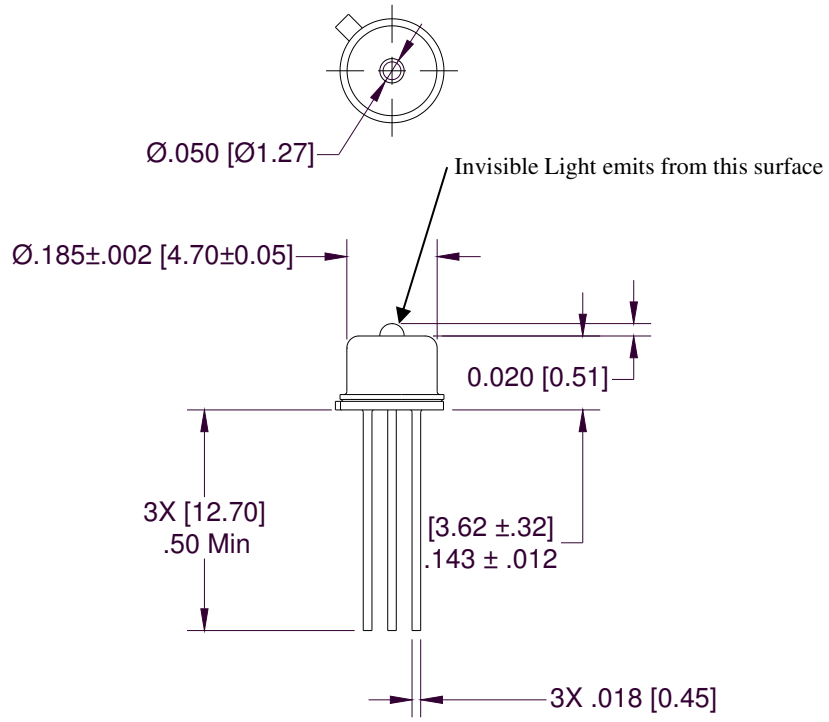

1) Tolerances are ±0.005 unless otherwise specified
2) Dimensions in inches [mm]

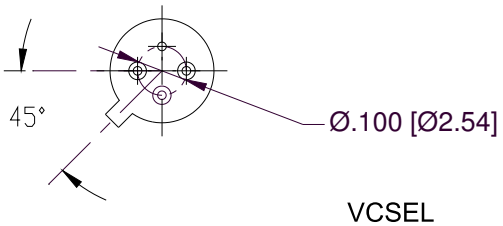

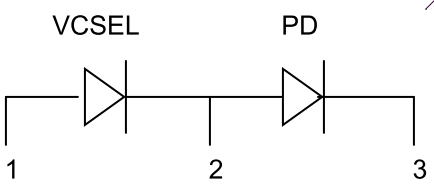

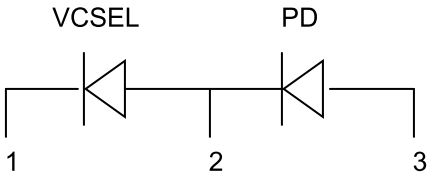

OPV314	
Pin	**Connection**
1	VCSEL Anode
2	VCSEL Cathode/PD Anode
3	PD Cathode

OPV314Y	
Pin	**Connection**
1	VCSEL Cathode
2	VCSEL Anode/PD Cathode
3	PD Anode

Optek reserves the right to make changes at any time, without notice, in order to improve design and provide the best product possible.