


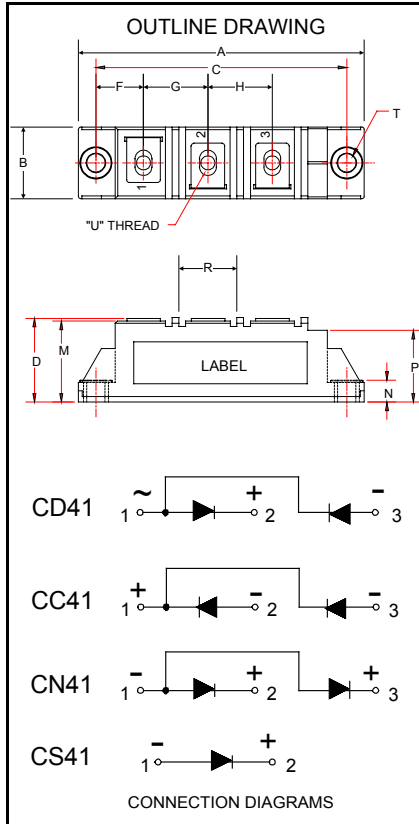

CD41__99A, CS41__99A
CN41__99A, CC41__99A
Dual & Single Diode Isolated
POW-R-BLOK™ Module
 100 Amperes / Up to 1600 Volts

Description:

Powerex Dual Diode & Single Diode Modules are designed for use in applications requiring rectification and isolated packaging. The modules are isolated for easy mounting with other components on a common heatsink. POW-R-BLOK™ has been tested and recognized by the Underwriters Laboratories.

Features:

- Electrically Isolated Heatsinking
- DBC Alumina (Al₂O₃) Insulator
- Copper Baseplate
- Low Thermal Impedance for Improved Current Capability
- UL Recognized (E78240)

Benefits:

- No Additional Insulation Components Required
- Easy Installation
- No Clamping Components Required
- Reduce Engineering Time

Ordering Information:

Select the complete nine digit module part number from the table below.
 Example: CD411699A is a 1600 Volt, 100 Ampere Dual Diode Isolated POW-R-BLOK™ Module

Outline Dimensions

Dimension	Inches	Millimeters
A	3.62	92
B	0.83	21
C	3.15	80
D	1.18	30
F	0.59	15
G	0.79	20
H	0.79	20
M	1.14	29
N	0.25	6.3
P	0.94	24
R	0.71	18
T	0.25	6.3
U	M5	M5

Note: Dimensions are for reference only.

Type	Voltage Volts (x100)	Current Amperes (x1)
CD41	08	99 (100A)
CN41	12	
CC41	16	
CS41		

Applications:

- Power Supplies
- Bridge Circuits
- AC & DC Motor Drives
- Battery Supplies
- Large IGBT Circuit Front Ends
- Lighting Control
- Heat & Temperature Control
- Welders



CD41__99A, CS41__99A
CN41__99A, CC41__99A

Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (724) 925-7272

POW-R-BLOK™
Dual & Single Diode Isolated Module
100 Amperes / Up to 1600 Volts

Absolute Maximum Ratings

Characteristics	Conditions	Symbol	Units	
Repetitive Peak Reverse Blocking Voltage		V_{RRM}	up to 1600	V
Non-Repetitive Peak Reverse Blocking Voltage		V_{RSM}	$V_{RRM} + 100$	V
(t < 5 msec)				
RMS Forward Current	DC Conduction, $T_C=90^{\circ}\text{C}$	$I_{F(RMS)}$	157	A
Average Forward Current	180° Conduction, $T_C=100^{\circ}\text{C}$	$I_{F(AV)}$	100	A
Peak One Cycle Surge Current, Non-Repetitive	60 Hz, 100% V_{RRM} reapplied, $T_J = 150^{\circ}\text{C}$	I_{FSM}	1,780	A
	60 Hz, No V_{RRM} reapplied, $T_J = 150^{\circ}\text{C}$	I_{FSM}	2,110	A
	50 Hz, 100% V_{RRM} reapplied, $T_J = 150^{\circ}\text{C}$	I_{FSM}	1,700	A
	50 Hz, No V_{RRM} reapplied, $T_J = 150^{\circ}\text{C}$	I_{FSM}	2,020	A
Peak Three Cycle Surge Current, Non-Repetitive	60 Hz, 100% V_{RRM} reapplied, $T_J = 150^{\circ}\text{C}$	I_{FSM}	1,310	A
	50 Hz, 100% V_{RRM} reapplied, $T_J = 150^{\circ}\text{C}$	I_{FSM}	1,250	A
Peak Ten Cycle Surge Current, Non-Repetitive	60 Hz, 100% V_{RRM} reapplied, $T_J = 150^{\circ}\text{C}$	I_{FSM}	940	A
	50 Hz, 100% V_{RRM} reapplied, $T_J = 150^{\circ}\text{C}$	I_{FSM}	900	A
I^2t for Fusing for One Cycle	8.3 ms, 100% V_{RRM} reapplied, $T_J = 150^{\circ}\text{C}$	I^2t	13,190	A^2sec
	8.3 ms, No V_{RRM} reapplied, $T_J = 150^{\circ}\text{C}$	I^2t	18,650	A^2sec
	10 ms, 100% V_{RRM} reapplied, $T_J = 150^{\circ}\text{C}$	I^2t	14,450	A^2sec
	10 ms, No V_{RRM} reapplied, $T_J = 150^{\circ}\text{C}$	I^2t	20,430	A^2sec
Operating Temperature		T_J	-40 to +150	$^{\circ}\text{C}$
Storage Temperature		T_{stg}	-40 to +150	$^{\circ}\text{C}$
Max. Mounting Torque, M6 Mounting Screw on Terminals			25	in. – Lb.
			3	Nm
Max. Mounting Torque, Module to Heatsink			44	in. – Lb.
			5	Nm
Module Weight, Typical			110	g
			3.88	Oz
V Isolation @ 25C	50-60 Hz, 1 second	V_{rms}	3500	V
Circuit To Base, All Terminals Shorted Together				

Electrical Characteristics, T_J=25°C unless otherwise specified

Characteristics	Symbol	Test Conditions	Min.	Max.	Units
Repetitive Peak Reverse Leakage Current	I _{RRM}	Up to 1600V, T _J =150°C		10	mA
Peak On-State Voltage	V _{FM}	T _J =25°C, I _{FM} =315A, 180° Conduction		1.45	V
Threshold Voltage, Low-level	V _{(FO)1}	T _J = 150°C, I = 16.7% x πI _{F(AV)} to πI _{F(AV)}		0.79	V
Slope Resistance, Low-level	r _{T1}			1.78	mΩ
Threshold Voltage, High-level	V _{(FO)2}	T _J = 150°C, I = πI _{F(AV)} to I _{FSM}		0.87	V
Slope Resistance, High-level	r _{T2}			1.57	mΩ
V _{TM} Coefficients, Full Range		T _J = 150°C, I = 15%I _{F(AV)} to I _{FSM}	A =	7.72E-01	
			B =	1.22E-02	
		V _{TM} = A+ B Ln I +C I + D Sqrt I	C =	1.57E-03	
			D =	-2.76E-05	

Thermal Characteristics

Characteristics	Symbol	Max.	Units
Thermal Resistance, Junction to Case	R _{ΘJ-C}	0.175 0.35	°C/W °C/W
Thermal Impedance Coefficients	Z _{ΘJ-C}	Z _{ΘJ-C} = K ₁ (1-exp(-t/τ ₁)) + K ₂ (1-exp(-t/τ ₂)) + K ₃ (1-exp(-t/τ ₃)) + K ₄ (1-exp(-t/τ ₄))	K ₁ = 9.82 E+1 τ ₁ = 4.60 E-3 K ₂ = -1.11 E+2 τ ₂ = 4.65 E-3 K ₃ = 1.32 E+1 τ ₃ = 5.05 E-3 K ₄ = 2.72 E-1 τ ₄ = 0.1398
Thermal Resistance, Case to Sink Lubricated	R _{ΘC-S}	0.1	°C/W




CD41__99A, CS41__99A
CN41__99A, CC41__99A


Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (724) 925-7272

POW-R-BLOK™
Dual & Single Diode Isolated Module
100 Amperes / Up to 1600 Volts


Maximum On-State Forward Voltage Drop
($T_J = 150^\circ\text{C}$)

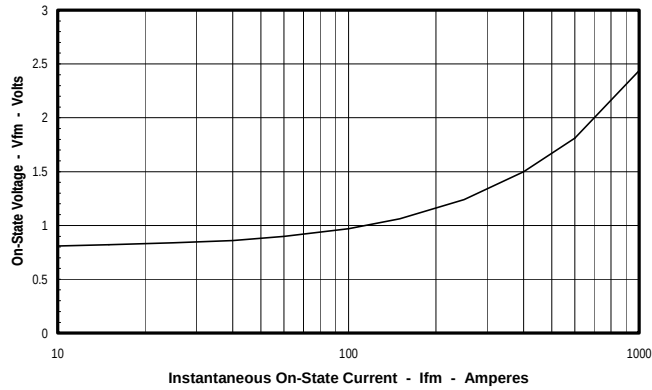


Maximum Transient Thermal Impedance
(Junction to Case)

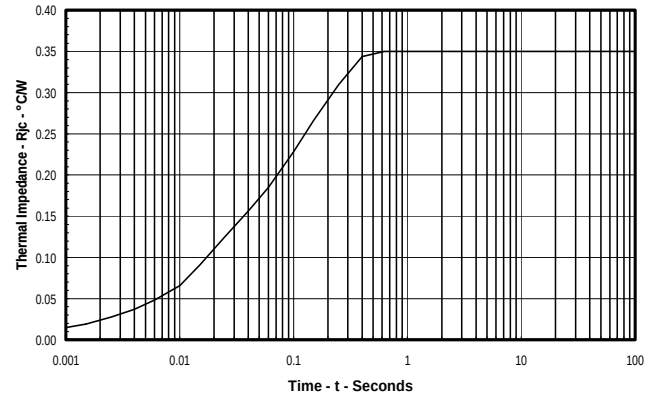


Maximum On-State Power Dissipation
(Sinusoidal Waveform)

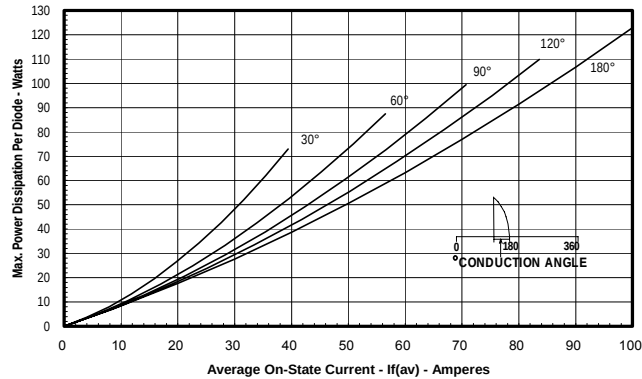

Maximum Allowable Case Temperature
(Sinusoidal Waveform)

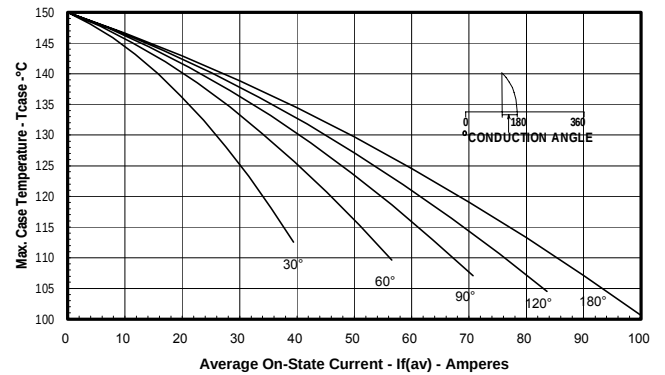

Maximum On-State Power Dissipation
(Rectangular Waveform)

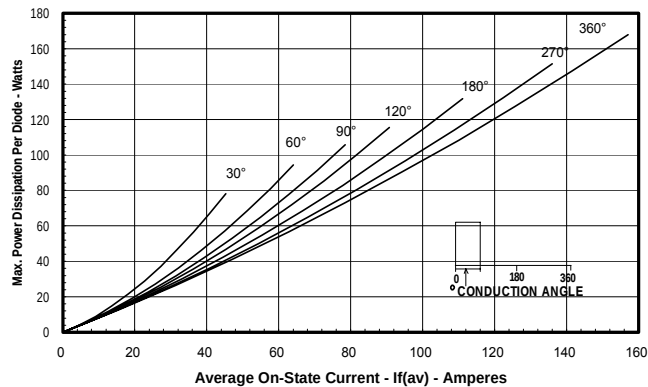

Maximum Allowable Case Temperature
(Rectangular Waveform)

