

International
IOR Rectifier

IRFH5010PbF

HEXFET® Power MOSFET

V_{DS}	100	V
$R_{DS(on)\ max}$ ($@V_{GS}$ = 10V)	9.0	mΩ
$Q_{g\ (typical)}$	65	nC
$R_{G\ (typical)}$	1.2	Ω
I_D ($@T_{c(Bottom)}$ = 25°C)	100⑥	A





PQFN 5X6 mm

Applications

- Secondary Side Synchronous Rectification
- Inverters for DC Motors
- DC-DC Brick Applications

Features and Benefits

Features		Benefits
Low RDSon (< 9 mΩ)		Lower Conduction Losses
Low Thermal Resistance to PCB (<0.5°C/W)		Increased Power Density
100% Rg tested		Increased Reliability
Low Profile (<0.9 mm)	results in	Increased Power Density
Industry-Standard Pinout	⇒	Multi-Vendor Compatibility
Compatible with Existing Surface Mount Techniques		Easier Manufacturing
RoHS Compliant Containing no Lead, no Bromide and no Halogen		Environmentally Friendlier
MSL1, Industrial Qualification		Increased Reliability

Orderable part number	Package Type	Standard Pack		Note
		Form	Quantity	
IRFH5010TRPBF	PQFN 5mm x 6mm	Tape and Reel	4000	
IRFH5010TR2PBF	PQFN 5mm x 6mm	Tape and Reel	400	

Absolute Maximum Ratings

	Parameter	Max.	Units
V_{DS}	Drain-to-Source Voltage	100	V
V_{GS}	Gate-to-Source Voltage	± 20	
I_D @ T_A = 25°C	Continuous Drain Current, V_{GS} @ 10V	13	A
I_D @ T_A = 70°C	Continuous Drain Current, V_{GS} @ 10V	11	
I_D @ $T_{C(Bottom)}$ = 25°C	Continuous Drain Current, V_{GS} @ 10V	100⑥	
I_D @ $T_{C(Bottom)}$ = 100°C	Continuous Drain Current, V_{GS} @ 10V	70	
I_{DM}	Pulsed Drain Current ①	400	
P_D @T_A = 25°C	Power Dissipation ⑤	3.6	W
P_D @ $T_{C(Bottom)}$ = 25°C	Power Dissipation ⑤	250	
	Linear Derating Factor ⑤	0.029	W/°C
T_J T_{STG}	Operating Junction and Storage Temperature Range	-55 to + 150	°C

Notes ① through ⑥ are on page 8

Static @ T_J = 25°C (unless otherwise specified)

	Parameter	Min.	Typ.	Max.	Units	Conditions
BV_{DSS}	Drain-to-Source Breakdown Voltage	100	—	—	V	V_{GS} = 0V, I_D = 250uA
$\Delta BV_{DSS}/\Delta T_J$	Breakdown Voltage Temp. Coefficient	—	0.11	—	V/°C	Reference to 25°C, I_D = 1.0mA
$R_{DS(on)}$	Static Drain-to-Source On-Resistance	—	7.5	9.0	mΩ	V_{GS} = 10V, I_D = 50A ③
$V_{GS(th)}$	Gate Threshold Voltage	2.0	—	4.0	V	V_{DS} = V_{GS}, I_D = 150µA
$\Delta V_{GS(th)}$	Gate Threshold Voltage Coefficient	—	-8.3	—	mV/°C	
I_{DSS}	Drain-to-Source Leakage Current	—	—	20	µA	V_{DS} = 100V, V_{GS} = 0V
		—	—	250		V_{DS} = 100V, V_{GS} = 0V, T_J = 125°C
I_{GSS}	Gate-to-Source Forward Leakage	—	—	100	nA	V_{GS} = 20V
	Gate-to-Source Reverse Leakage	—	—	-100		V_{GS} = -20V
gfs	Forward Transconductance	206	—	—	S	V_{DS} = 25V, I_D = 50A
Q_g	Total Gate Charge	—	65	98	nC	V_{DS} = 50V V_{GS} = 10V I_D = 50A
Q_{gs1}	Pre-Vth Gate-to-Source Charge	—	11	—		
Q_{gs2}	Post-Vth Gate-to-Source Charge	—	4.3	—		
Q_{gd}	Gate-to-Drain Charge	—	20	—		
Q_{godr}	Gate Charge Overdrive	—	30	—		
Q_{sw}	Switch Charge (Q_{gs2} + Q_{gd})	—	24	—		
Q_{oss}	Output Charge	—	18	—	nC	V_{DS} = 16V, V_{GS} = 0V
R_G	Gate Resistance	—	1.2	—	Ω	
$t_{d(on)}$	Turn-On Delay Time	—	9	—	ns	V_{DD} = 50V, V_{GS} = 10V I_D = 50A R_G=1.3Ω
t_r	Rise Time	—	12	—		
$t_{d(off)}$	Turn-Off Delay Time	—	27	—		
t_f	Fall Time	—	8.6	—		
C_{iss}	Input Capacitance	—	4340	—	pF	V_{GS} = 0V V_{DS} = 25V f = 1.0MHz
C_{oss}	Output Capacitance	—	425	—		
C_{rss}	Reverse Transfer Capacitance	—	162	—		

Avalanche Characteristics

	Parameter	Typ.	Max.	Units
E_{AS}	Single Pulse Avalanche Energy ②	—	227	mJ
I_{AR}	Avalanche Current ①	—	50	A

Diode Characteristics

	Parameter	Min.	Typ.	Max.	Units	Conditions
I_S	Continuous Source Current (Body Diode)	—	—	100⑥	A	MOSFET symbol showing the integral reverse p-n junction diode.
I_{SM}	Pulsed Source Current (Body Diode) ①	—	—	400		
V_{SD}	Diode Forward Voltage	—	—	1.3	V	T_J = 25°C, I_S = 50A, V_{GS} = 0V ③
t_{rr}	Reverse Recovery Time	—	34	51	ns	T_J = 25°C, I_F = 50A, V_{DD} = 50V
Q_{rr}	Reverse Recovery Charge	—	256	384	nC	di/dt = 500A/µs ③
t_{on}	Forward Turn-On Time	Time is dominated by parasitic Inductance				

Thermal Resistance

	Parameter	Typ.	Max.	Units
$R_{\theta JC}$ (Bottom)	Junction-to-Case ④	—	0.5	°C/W
$R_{\theta JC}$ (Top)	Junction-to-Case ④	—	15	
$R_{\theta JA}$	Junction-to-Ambient ⑤	—	35	
$R_{\theta JA}$ (<10s)	Junction-to-Ambient ⑤	—	22	

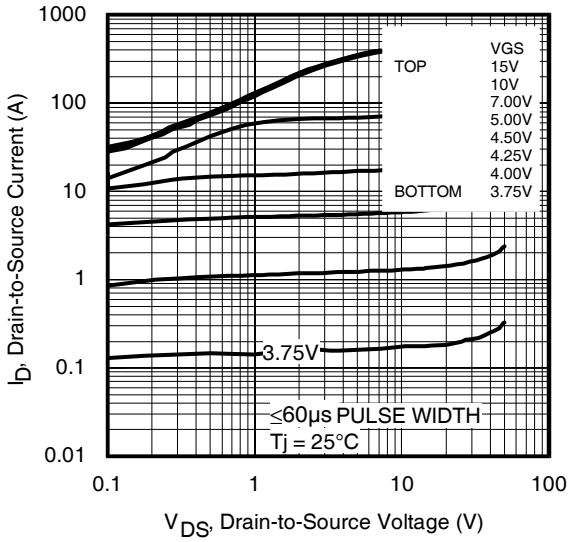


Fig 1. Typical Output Characteristics

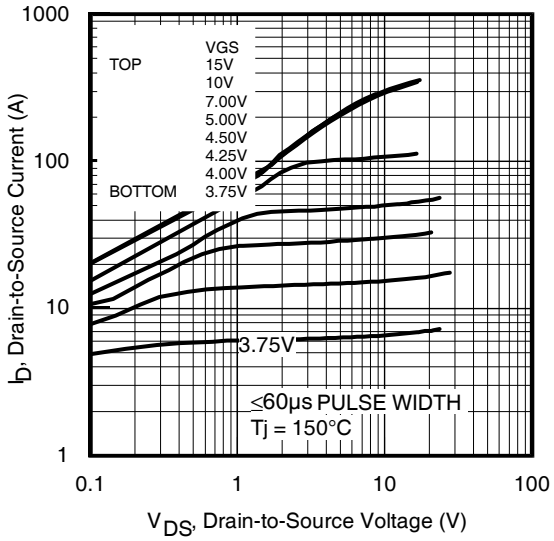


Fig 2. Typical Output Characteristics

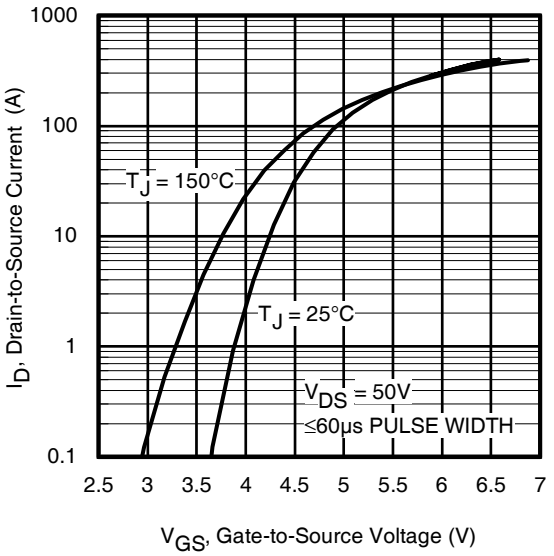


Fig 3. Typical Transfer Characteristics

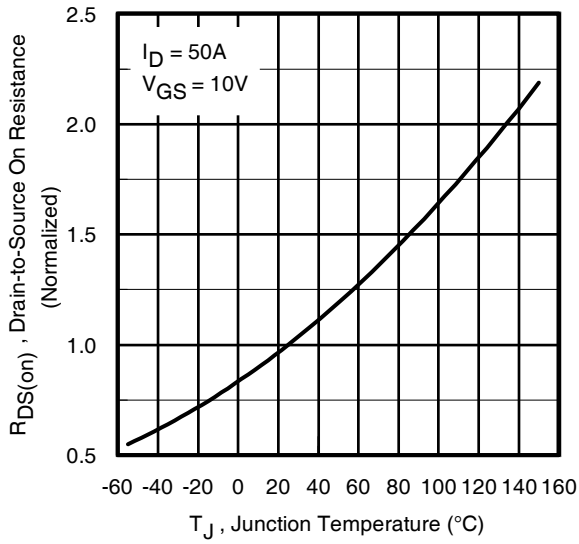


Fig 4. Normalized On-Resistance Vs. Temperature

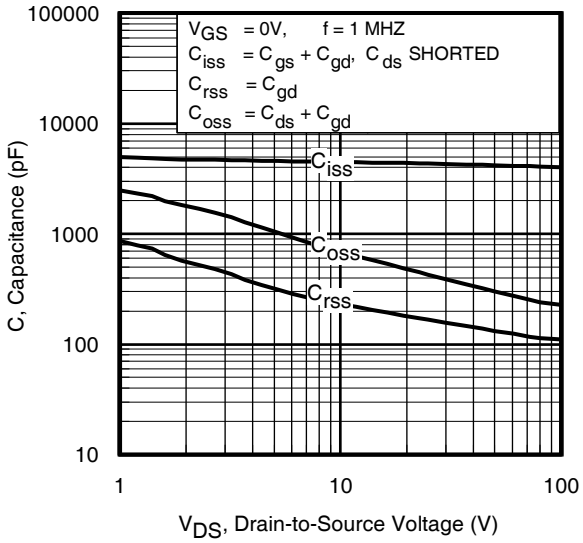


Fig 5. Typical Capacitance Vs.Drain-to-Source Voltage

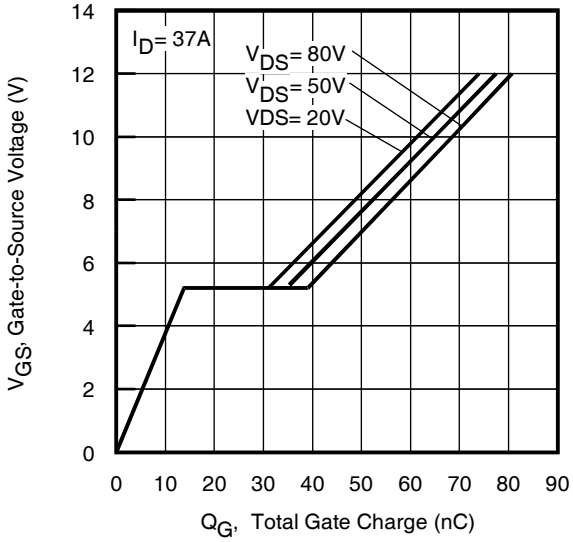


Fig 6. Typical Gate Charge Vs.Gate-to-Source Voltage

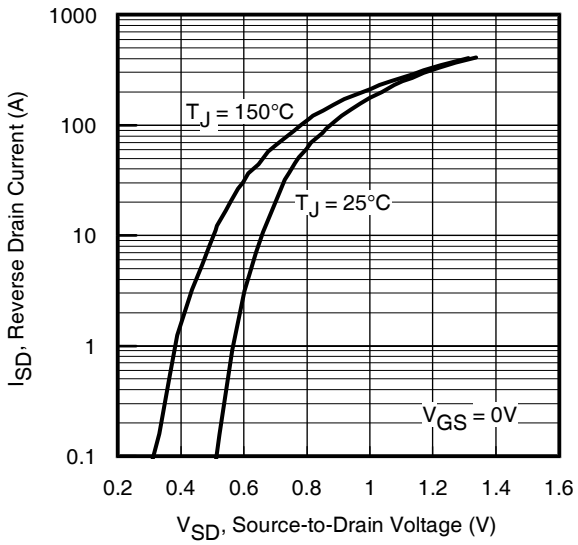


Fig 7. Typical Source-Drain Diode Forward Voltage

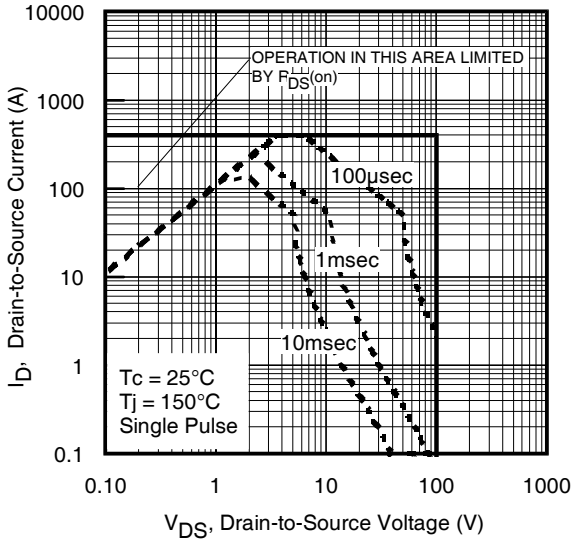


Fig 8. Maximum Safe Operating Area

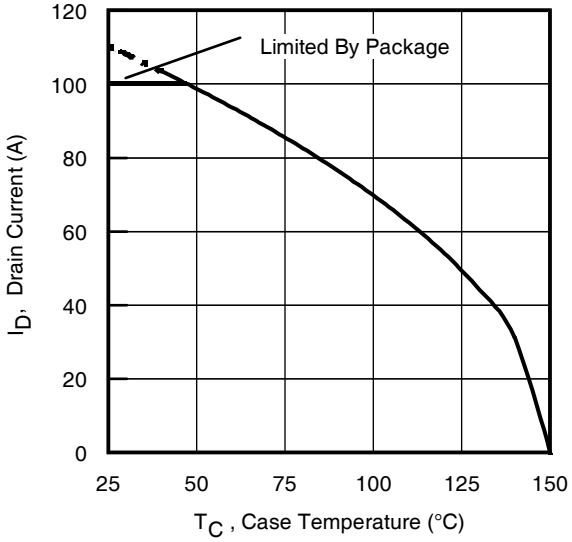


Fig 9. Maximum Drain Current Vs. Case (Bottom) Temperature

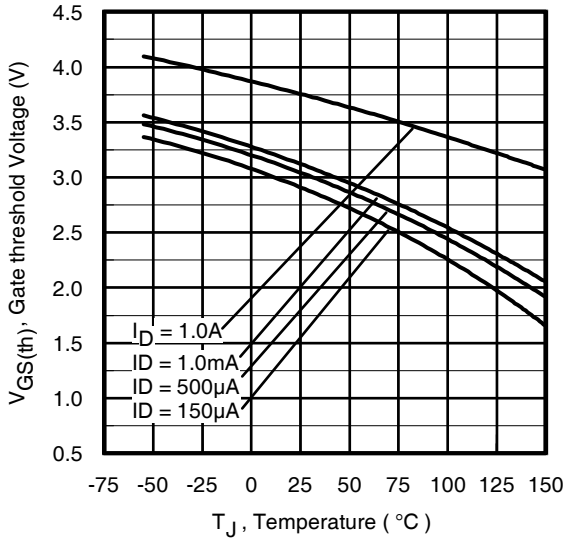


Fig 10. Threshold Voltage Vs. Temperature

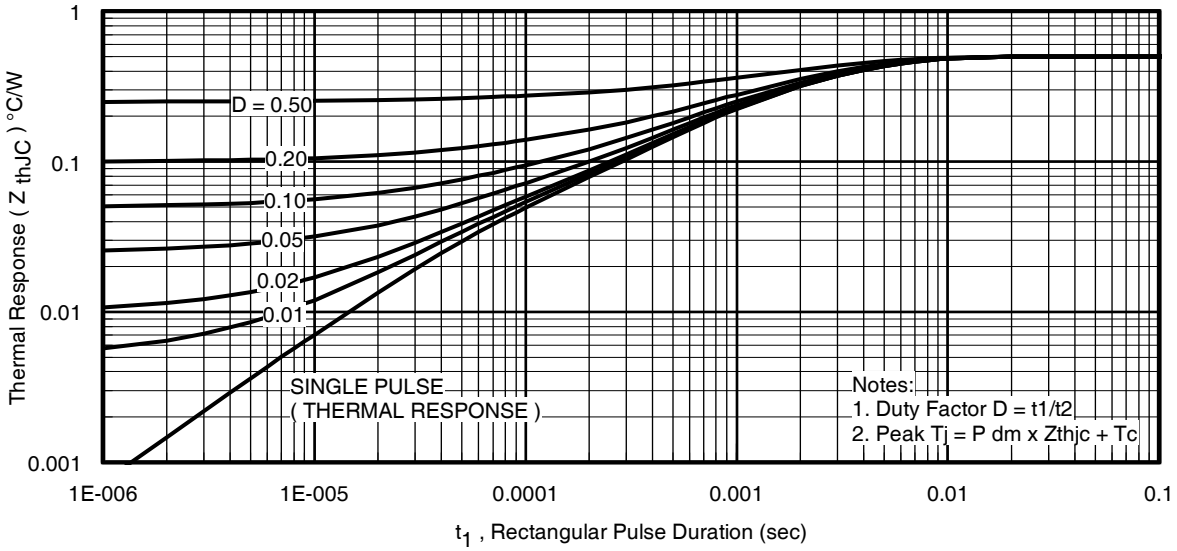


Fig 11. Maximum Effective Transient Thermal Impedance, Junction-to-Case (Bottom)

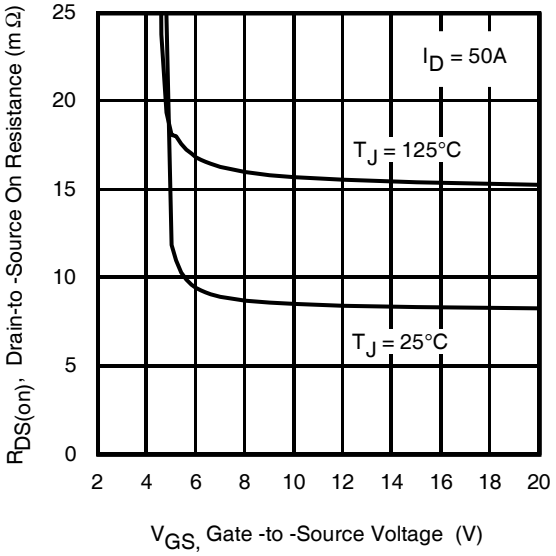


Fig 12. On-Resistance vs. Gate Voltage

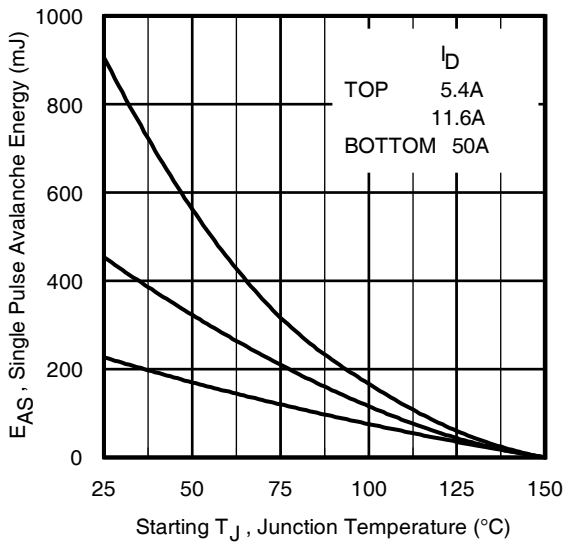


Fig 13. Maximum Avalanche Energy vs. Drain Current

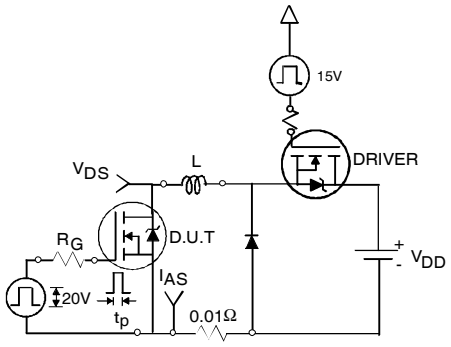


Fig 14a. Unclamped Inductive Test Circuit

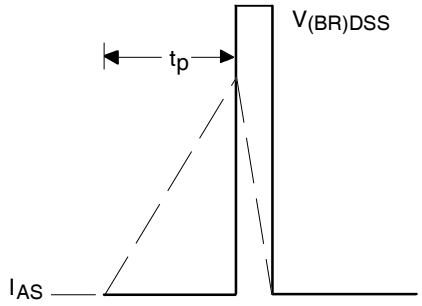


Fig 14b. Unclamped Inductive Waveforms

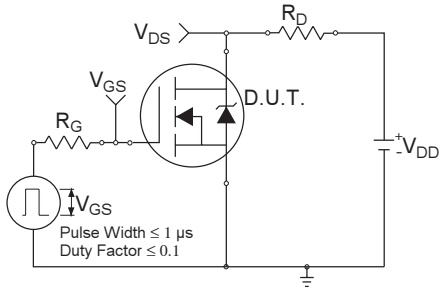


Fig 15a. Switching Time Test Circuit

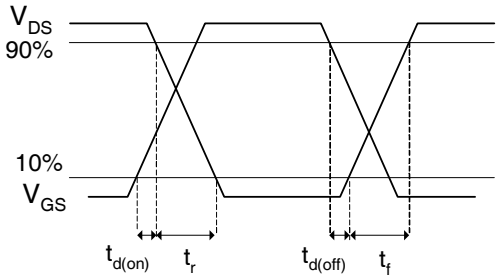


Fig 15b. Switching Time Waveforms

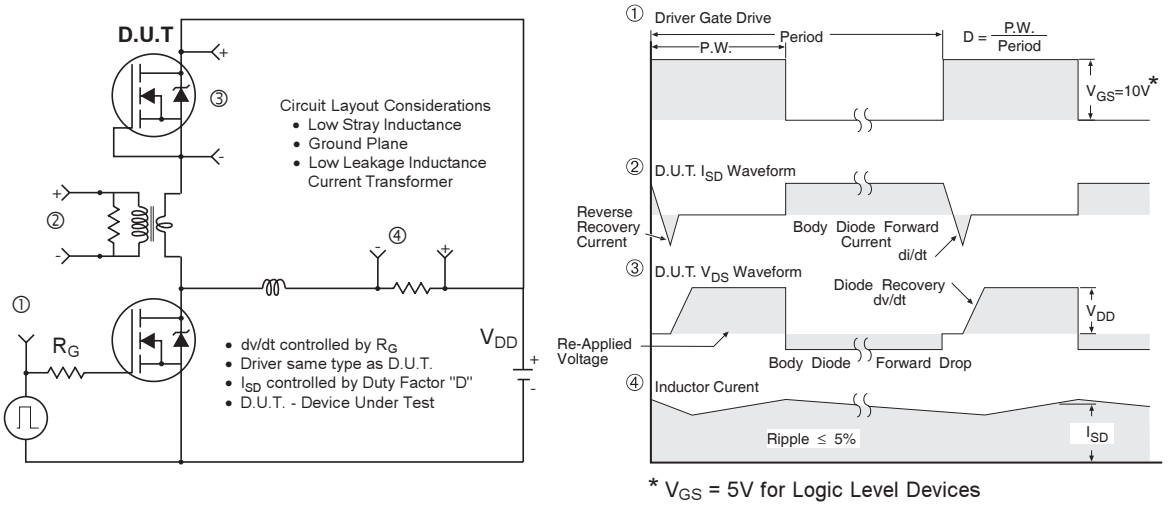


Fig 16. Peak Diode Recovery dv/dt Test Circuit for N-Channel HEXFET® Power MOSFETs

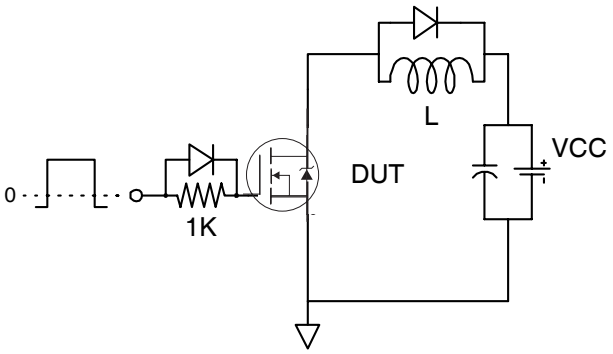


Fig 17. Gate Charge Test Circuit



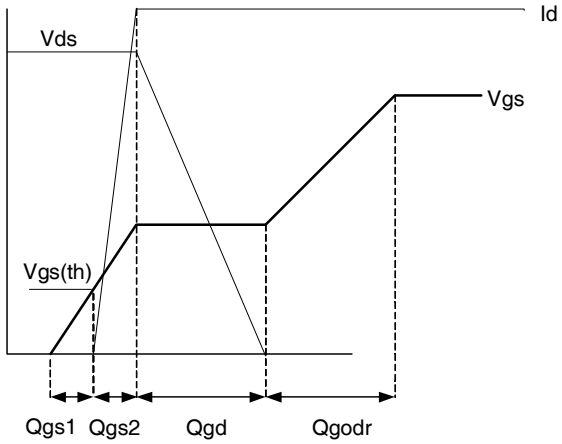


Fig 18. Gate Charge Waveform

PQFN 5x6 Outline "B" Package Details

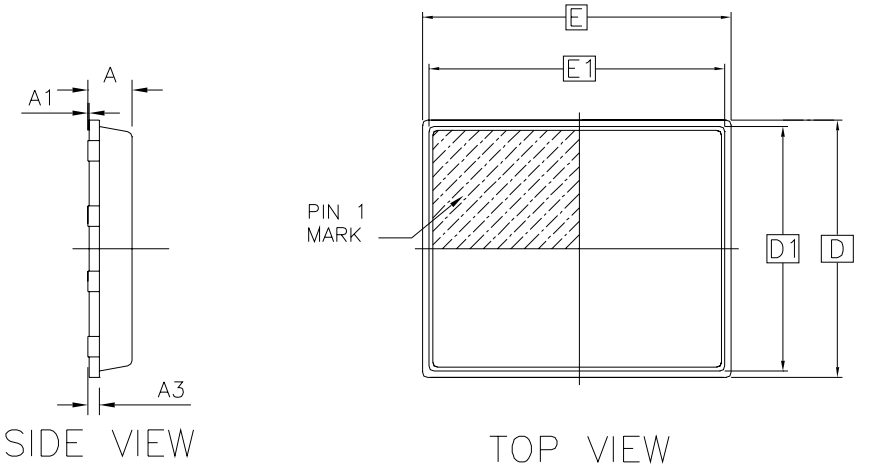


OUTLINE PQFN 5x6B			
DIM / SYMBOL	MIN	NOM	MAX
A	0.80	0.83	0.90
A1	0	0.020	0.05
A3		0.20 REF	
b	0.35	0.40	0.47
D		5.00 BSC	
D1		4.75 BSC	
D2	4.10	4.21	4.30
e		1.27 BSC	
E		6.00 BSC	
E1		5.75 BSC	
E2	3.38	3.48	3.58
L	0.70	0.80	0.90
M		1.30 REF	
N		0.40 REF	

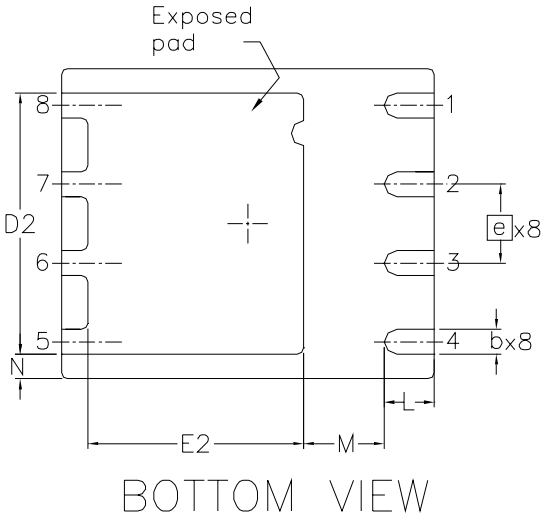


For footprint and stencil design recommendations, please refer to application note AN-1154 at http://www.irf.com/technical-info/appnotes/an-1154.pdf

PQFN 5x6 Outline "B" Part Marking

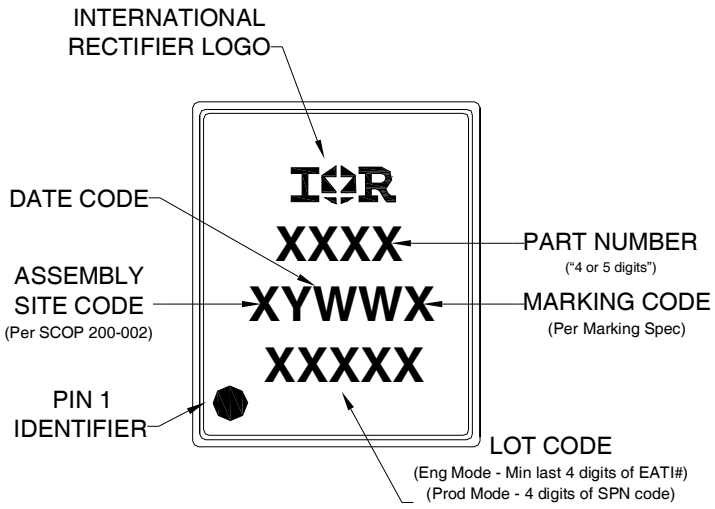

Note: For the most current drawing please refer to IR website at: http://www.irf.com/package/

PQFN 5x6 Outline "B" Tape and Reel

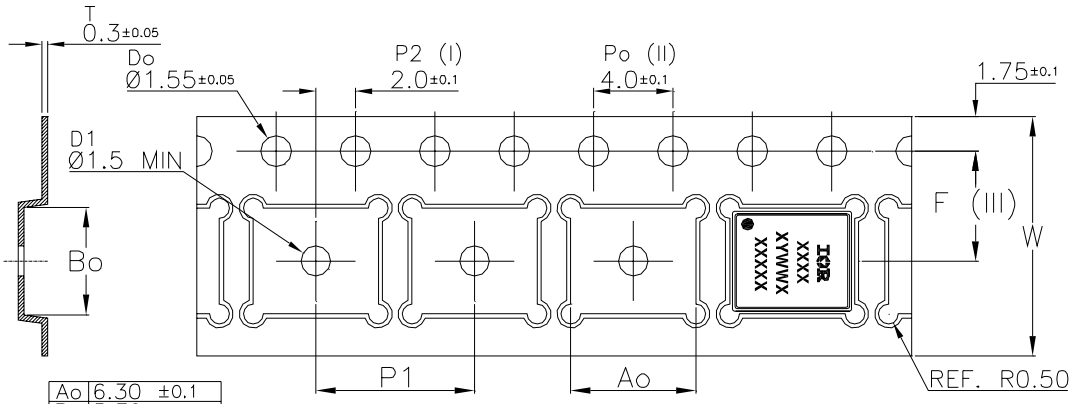

Ao	6.30	±0.1
Bo	5.30	±0.1
F	5.50	±0.1
P1	8.00	±0.1
W	12.00	±0.3

Qualification information†

Qualification level	Industrial†† (per JEDEC JESD47F ††† guidelines)	
Moisture Sensitivity Level	PQFN 5mm x 6mm	MSL1 (per JEDEC J-STD-020D†††)
RoHS compliant	Yes	

† Qualification standards can be found at International Rectifier's web site
http://www.irf.com/product-info/reliability

†† Higher qualification ratings may be available should the user have such requirements. Please contact your International Rectifier sales representative for further information:
http://www.irf.com/whoto-call/salesrep/

††† Applicable version of JEDEC standard at the time of product release.

Notes:

① Repetitive rating; pulse width limited by max. junction temperature.

② Starting T_J = 25°C, L = 0.181mH, R_G = 50Ω, I_{AS} = 50A.

③ Pulse width ≤ 400µs; duty cycle ≤ 2%.

④ R_θ is measured at T_J of approximately 90°C.

⑤ When mounted on 1 inch square 2 oz copper pad on 1.5x1.5 in. board of FR-4 material.

⑥ Calculated continuous current based on maximum allowable junction temperature. Package is limited to 100A by production test capability

Data and specifications subject to change without notice.

International
IOR Rectifier

IR WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105
TAC Fax: (310) 252-7903
Visit us at www.irf.com for sales contact information.03/2010