


Rev	AWO #	Description	Date	Appr
-		RELEASED	5/26/10	

APPROVED: _____

DATE: _____ TITLE: _____

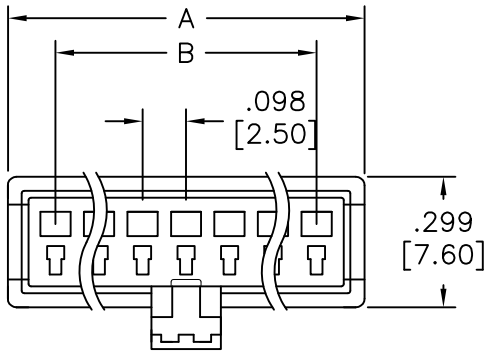

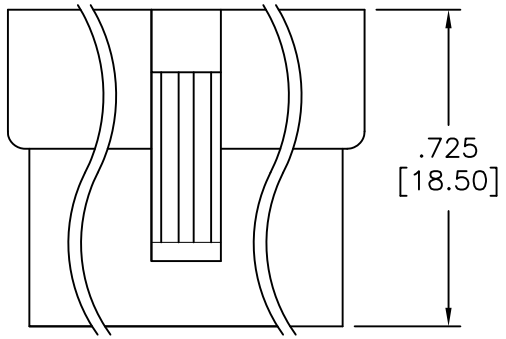



SPECIFICATIONS:

Material:

Insulator: Nylon66, rated UL 94V–0

Insulator color: Black

Electrical:

Operating voltage: 250 VAC max

Current rating: 3 Amps max.

Insulation resistance: 500 Mohms min

Dielectric withstanding voltage: 1000 VAC for 1 minute

Mechanical:

Temperature Rating:

Operating temperature: –25°C to +85°C

Environmental:

Lead free, RoHS compliant.

Recommended soldering temp: 235°C for 5 sec.

RoHS COMPLIANT

Poles: 2 thru 12

A = .098 [2.50] X No. of Positions + .125 [3.20]

B = .098 [2.50] X No. of Spaces

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MM [INCHES]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	DY	5/26/10
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: WIRE TO WIRE, FEMALE, .098 [2.50] PITCH

SIZE	PART NO.	REV.
X	DMQ-XX	-

REF:	SCALE:	SHEET
S00016T	NTS	1 OF 1