


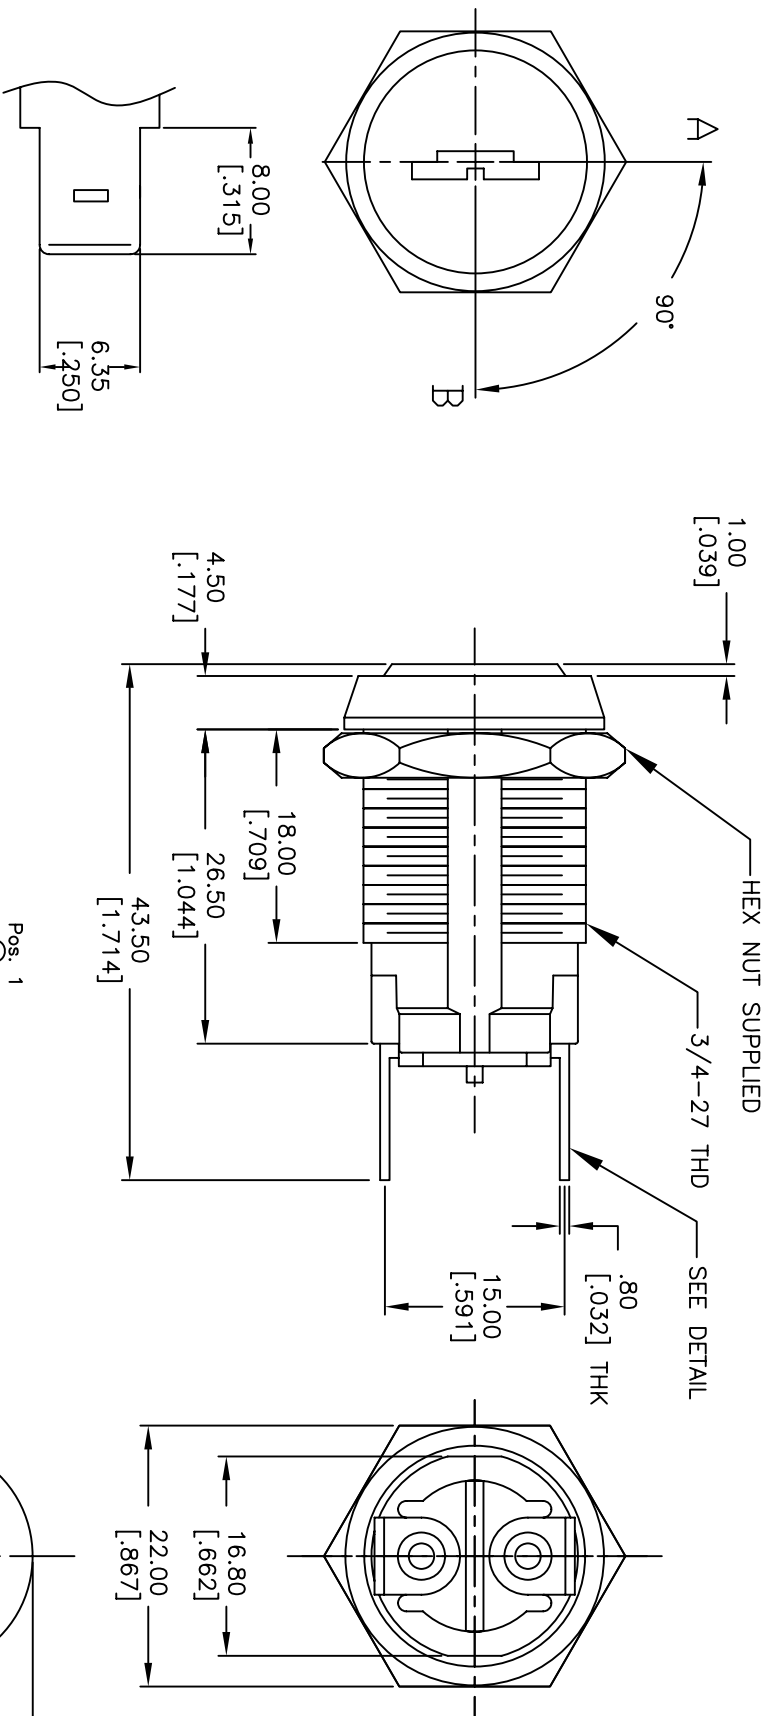

NOTES:

TERMINATION DETAIL

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. RATING: 4A @125VAC, 2A @250VAC
5. CONTACT RESISTANCE: 10mILLI-OHMS
6. DIELECTRIC STRENGTH: 1500 VAC-1Minute
7. INSULATION RESISTANCE: 200 Mega-OHMS
8. MATERIALS:
HOUSING: ZINC ALLOY DIE CAST
CYLINDER: ZINC ALLOY W/CHROME PLATE
CONTACTS: SILVER PLATE
CRISS CROSS TUMBLERS. (11 BLADE)
DOUBLE BITTED KEYS (2) STAMPED 2007
9. KEYLOCK, KEYS, AND HEX NUT TO BE PACKED TOGETHER IN INDIVIDUAL BAGS.

LEGEND


• = INDICATE NO KEY PULL

⊙ = INDICATES KEY PULL POSSIBLE

CIRCUIT: SPST
CONTACT CONFIGURATION

SWITCH FUNCTION	
POS 1	POS 2
↑	→
DN	DN

RECOMMENDED PANEL CUTOUT

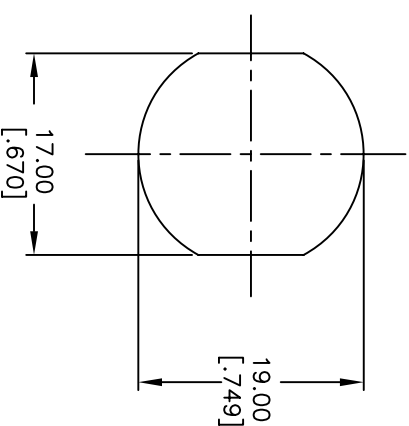

C	18008	ADD NOTE 9	3/12/08	RC	 K0128G-2007			
B	12872	REMOVE TERM /NOTE 8	3/4/03	CJB				
A	11754	RELEASED FOR PRODUCTION	10/17/01	CJB				
REV.	ECN No.	DESCRIPTION	DATE	CHKD				
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED								
SCALE					DATE	DR	DWG	REV
1.5:1					10/17/01	CJB	K200204	C