

# T1/CEPT/ISDN PRI Interface Transformer

Turns Ratio ( ± 5% )	*1 : 1/1.26 & 1 : 2CT
----------------------	-----------------------

Flammability: Materials used in the production of these units meet requirements of UL94-VO and IEC 695-2-2 needle flame test.

PARAMETER	MIN.	MAX.	UNITS
OCL (Primary)	1.2		mH
Leakage Inductance		0.6	μH
Capacitance (C <sub>ww</sub> )		30	pF
Primary DC Resistance		0.7	Ohms
Secondary DC Resistance		0.8 & 1.0	Ohms

Parts shipped in anti-static tubes. 33 pieces per tube


*Tape & Reel Available*

Primary Pins 14-16 & 6-8


Isolation 1500 V<sub>RMS</sub> Min.

\*Primary Pins 14-16 : Secondary Pins 2 - 3 = 1 : 1  
 Primary Pins 14-16 : Secondary Pins 1 - 3 = 1 : 1.26

## PHYSICAL DIMENSIONS inches (mm)

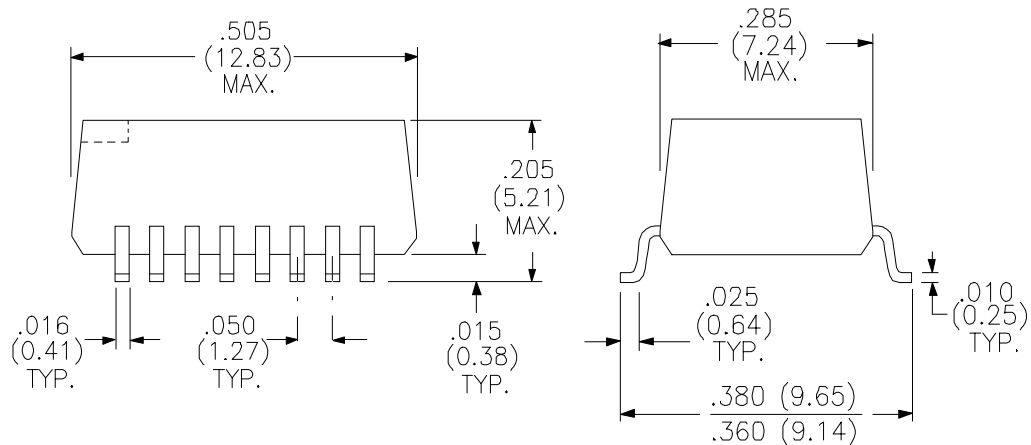

## Schematic Diagram

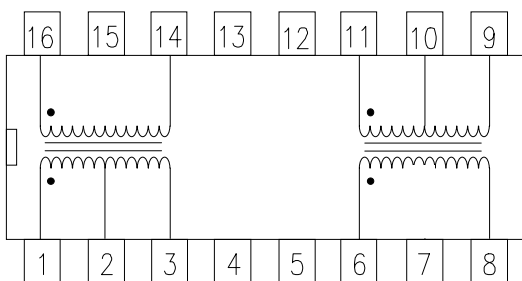

RHOMBUS P/N: <b>T-14117B</b>	
CUST P/N:	NAME:
DATE: 07/02/98	SHEET: 1 OF 1