

Wall Industries, Inc.

JRW SERIES

4:1 Ultra Wide Input Voltage Ranges
Single and Dual Outputs
Standard 2.0" x 1.0" x 0.4" Package
10 Watt DC/DC Power Converters



FEATURES

- 10 Watts Maximum Output Power
- Single and Dual Outputs
- Standard 2.0" x 1.0" x 0.4" Package
- 4:1 Ultra Wide Input Voltage Ranges
- High Efficiency up to 84%
- No Minimum Load Requirement
- 1600VDC I/O Isolation
- Positive or Negative Remote ON/OFF Control Option
- Fixed Switching Frequency: 300KHz
- Over Voltage, Over Load, and Short Circuit Protected
- Extended Operating Temperature Range Available
- Six-Sided Continuous Shielding
- CE Mark Meets 2006/95/EC, 93/68/EEC, and 2004/108/EC
- UL60950-1, EN60950-1, and IEC60950-1 Safety Approvals
- Compliant to RoHS EU Directive 2002/95/EC
- UL94V-0 Compliant

APPLICATIONS

- Wireless Networks
- Telecom / Datacom
- Measurement Equipment
- Industry Control Systems
- Semiconductor Equipment

OPTIONS

- Positive Remote ON/OFF (Suffix "P")
- Negative Remote ON/OFF (Suffix "R")
- Extended Operating Temperature Range (Suffix "-I")
- Heatsink (Suffix "HS")

DESCRIPTION

The JRW series of DC/DC power converters provides 10 watts of output power in a 2.0 x 1.0 x 0.4 inch industry standard package and footprint. This series has single and dual output models with 4:1 ultra wide input voltage ranges of 9-36VDC and 18-75VDC. Some features include high efficiency up to 84%, 1600VDC I/O isolation, and six-sided shielding. This series is also protected against over voltage, over load, and short circuit conditions. This series is RoHS and UL94V-0 compliant and has UL60950-1, EN60950-1, and IEC60950-1 safety approvals.

| SPECIFICATIONS: JRW SERIES | | | | | | |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------|--------------------|---------------------------------------------------|------|-------|------------------|
| All specifications are based on 25°C, Nominal Input Voltage, and Maximum Output Current unless otherwise noted. We reserve the right to change specifications based on technological advances. | | | | | | |
| SPECIFICATION | TEST CONDITIONS | | Min | Nom | Max | Unit |
| INPUT SPECIFICATIONS | | | | | | |
| Input Voltage Range | 24VDC nominal input models | | 9 | 24 | 36 | VDC |
| | 48VDC nominal input models | | 18 | 48 | 75 | |
| Input Surge Voltage (100ms max) | 24VDC nominal input models | | | | 50 | VDC |
| | 48VDC nominal input models | | | | 100 | |
| Input Reflected Ripple Current | | | | 30 | | mAp-p |
| Input Filter | | | Pi type | | | |
| OUTPUT SPECIFICATIONS | | | | | | |
| Output Voltage | | | See Table | | | |
| Line Regulation | Low line to high line at full load | | | ±0.2 | | % |
| Load Regulation | No load to full load | | Single Output Models | ±0.5 | | % |
| | | | Dual Output Models | ±1 | | |
| Cross Regulation (Dual Output Models) | Asymmetrical load 25% to 100% full load | | | ±5 | | % |
| Voltage Accuracy | | | | ±1 | | % |
| Output Power | | | | | 10 | W |
| Output Current | | | See Table | | | |
| Minimum Load | | | 0 | | | % |
| Ripple & Noise (20MHz Bandwidth) | Nominal Vin and full load | | Single Output Models | 50 | | mVp-p |
| | | | Dual Output Models | 75 | | |
| Transient Response Recovery Time | 25% load step change | | | 250 | | µs |
| Start-Up Time | Nominal Vin and constant resistive load | Power Up | | 20 | | ms |
| Temperature Coefficient | | | | | ±0.02 | %/°C |
| PROTECTION | | | | | | |
| Over Voltage Protection | Zener diode clamp | 3.3V output models | | 3.9 | | VDC |
| | | 5V output models | | 6.2 | | |
| | | 12V output models | | 15 | | |
| | | 15V output models | | 18 | | |
| Over Load Protection | % of full load at nominal input | | | | 150 | % |
| Short Circuit Protection | | | hiccup, automatic recovery | | | |
| GENERAL SPECIFICATIONS | | | | | | |
| Efficiency | Nominal Vin and full load | | See Table | | | |
| Switching Frequency | Full load to minimum load | | 270 | 300 | 330 | KHz |
| Isolation Voltage | Input to Output | 1 minute | 1600 | | | VDC |
| | Input to Case | | 1600 | | | |
| | Output to Case | | 1600 | | | |
| Isolation Resistance | | | 1 | | | GΩ |
| Isolation Capacitance | | | | | 300 | pF |
| REMOTE ON/OFF (See Note 6) | | | | | | |
| Positive Logic (Suffix P) | DC/DC ON | | Open or 3.5V < Vr < 12V | | | |
| | DC/DC OFF | | Short or 0V < Vr < 1.2V | | | |
| Negative Logic (Suffix R) | DC/DC ON | | Short or 0V < Vr < 1.2V | | | |
| | DC/DC OFF | | Open or 3.5V < Vr < 12V | | | |
| Input Current of Remote Control Pin | Nominal Vin | | -0.5 | | +1.0 | mA |
| Remote Off State Input Current | Nominal Vin | | | 20 | | mA |
| ENVIRONMENTAL SPECIFICATIONS | | | | | | |
| Operating Ambient Temperature | Standard | With derating | -25 | | +85 | °C |
| | "I" Version (suffix -I) | With derating | -40 | | +85 | |
| Maximum Case Temperature | | | | | +100 | °C |
| Storage Temperature | | | -55 | | +105 | °C |
| Thermal Impedance (See Note 8) | Natural convection | | | | 12 | °C/Watt |
| | Natural convection with heatsink | | | | 10 | |
| Relative Humidity (non-condensing) | | | 5 | | 95 | % RH |
| Thermal Shock | | | MIL-STD-810F | | | |
| Vibration | | | MIL-STD-810F | | | |
| MTBF (See Note 1) | BELLCORE TR-NWT-000332 | | 1,976,000 hours | | | |
| | MIL-HDBK-217F | | 1,416,000 hours | | | |
| PHYSICAL SPECIFICATIONS | | | | | | |
| Weight | | | 0.95oz (27g) | | | |
| Case Material | | | Nickel-coated copper | | | |
| Base Material | | | Non-conductive black plastic | | | |
| Potting Material | | | Epoxy (UL94V-0) | | | |
| Dimensions (L x W x H) | | | 2.00 x 1.00 x 0.40 inches (50.8 x 25.4 x 10.2 mm) | | | |
| SAFETY & EMC CHARACTERISTICS | | | | | | |
| Safety Approvals | | | UL60950-1, EN60950-1, IEC60950-1 | | | |
| EMI (See Note 9) | EN55022 | | Class A | | | |
| ESD | EN61000-4-2 | Air Contact | ±8KV | | | Perf. Criteria B |
| Radiated Immunity | EN61000-4-3 | | 10 V/m | | | Perf. Criteria A |
| Fast Transient (See Note 10) | EN61000-4-4 | | ±2KV | | | Perf. Criteria B |
| Surge (See Note 10) | EN61000-4-5 | | ±1KV | | | Perf. Criteria B |
| Conducted Immunity | EN61000-4-6 | | 10 Vrms | | | Perf. Criteria A |

MODEL SELECTION TABLES

| SINGLE OUTPUT MODELS | | | | | | | | | | |
|----------------------|-------------------------|----------------|----------------|-----------|------------------------|--------------------------|--------------------------------------|--------------|---------------------------|----------------------------------------|
| Model Number | Input Voltage Range | Output Voltage | Output Current | | Input Current | | Output ⁽⁴⁾ Ripple & Noise | Output Power | Efficiency ⁽⁴⁾ | Maximum ⁽⁵⁾ Capacitive Load |
| | | | Min. Load | Full Load | No Load ⁽³⁾ | Full Load ⁽²⁾ | | | | |
| JRW24S33-2500 | 24 VDC (9 – 36 VDC) | 3.3 VDC | 0mA | 2500mA | 13mA | 465mA | 50mVp-p | 8.25W | 78% | 6800µF |
| JRW24S5-2000 | | 5 VDC | 0mA | 2000mA | 11mA | 548mA | 50mVp-p | 10W | 80% | 4700µF |
| JRW24S12-830 | | 12 VDC | 0mA | 830mA | 16mA | 519mA | 50mVp-p | 10W | 84% | 690µF |
| JRW24S15-660 | | 15 VDC | 0mA | 670mA | 26mA | 544mA | 50mVp-p | 10W | 81% | 470µF |
| JRW48S33-2500 | 48 VDC (18 – 75 VDC) | 3.3 VDC | 0mA | 2500mA | 10mA | 239mA | 50mVp-p | 8.25W | 76% | 6800µF |
| JRW48S5-2000 | | 5 VDC | 0mA | 2000mA | 9mA | 270mA | 50mVp-p | 10W | 81% | 4700µF |
| JRW48S12-830 | | 12 VDC | 0mA | 830mA | 9mA | 259mA | 50mVp-p | 10W | 84% | 690µF |
| JRW48S15-660 | | 15 VDC | 0mA | 670mA | 11mA | 262mA | 50mVp-p | 10W | 84% | 470µF |

| DUAL OUTPUT MODELS | | | | | | | | | | |
|--------------------|-------------------------|----------------|----------------|-----------|------------------------|--------------------------|--------------------------------------|--------------|---------------------------|----------------------------------------|
| Model Number | Input Voltage Range | Output Voltage | Output Current | | Input Current | | Output ⁽⁴⁾ Ripple & Noise | Output Power | Efficiency ⁽⁴⁾ | Maximum ⁽⁵⁾ Capacitive Load |
| | | | Min. Load | Full Load | No Load ⁽³⁾ | Full Load ⁽²⁾ | | | | |
| JRW24D5-1000 | 24 VDC (9 – 36 VDC) | ±5 VDC | 0mA | ±1000mA | 15mA | 534mA | 75mVp-p | 10W | 82% | ±680µF |
| JRW24D12-420 | | ±12 VDC | 0mA | ±416mA | 15mA | 547mA | 75mVp-p | 10W | 80% | ±330µF |
| JRW24D15-330 | | ±15 VDC | 0mA | ±333mA | 22mA | 548mA | 75mVp-p | 10W | 80% | ±110µF |
| JRW48D5-1000 | 48 VDC (18 – 75 VDC) | ±5 VDC | 0mA | ±1000mA | 12mA | 267mA | 75mVp-p | 10W | 82% | ±680µF |
| JRW48D12-420 | | ±12 VDC | 0mA | ±416mA | 20mA | 281mA | 75mVp-p | 10W | 78% | ±330µF |
| JRW48D15-330 | | ±15 VDC | 0mA | ±333mA | 20mA | 270mA | 75mVp-p | 10W | 81% | ±110µF |

NOTES


- BELLCORE TR-NWT-000332. Case 1: 50% Stress, Temperature at 40°C.
MIL-HDBK-217F Notice2 @Ta=25°C, Full load (Ground, Benign, controlled environment).
- Maximum value at nominal input voltage and full load.
- Typical value at nominal input voltage and no load.
- Typical value at nominal input voltage and full load.
- Test by minimum Vin and constant resistive load.
- The on/off control pin is referenced to –Vin.
To order positive logic remote on/off, add the suffix “P” to the model number (Ex: JRW24S15-660P).
To order negative logic remote on/off, add the suffix “R” to the model number (Ex: JRW24S15-660R).
- “I” type models are more efficient; therefore, they can be operated over a more extensive temperature range than the standard version.
To order extended operating temperature range, add the suffix “-I” to the model number (Ex: JRW24S15-660-I).
- Heatsink is optional and P/N: 7G-0020C-F.
- The JRW series can meet EN55022 Class A with external capacitors in parallel connected to the input pins.
Recommended: 24Vin: 2.2µF/50V 1812 MLCC
48Vin: 1.5µF/100V 1812 MLCC
- An external input filter capacitor is required if the module has to meet EN61000-4-4, EN61000-4-5. The filter capacitor suggested is Nippon chemi-con KY series, 220µF /100V, ESR 48mΩ.

CAUTION: This power module is not internally fused. An input line fuse must always be used.


**Due to advances in technology, specifications subject to change without notice.*

CHARACTERISTICS


Derating Curve

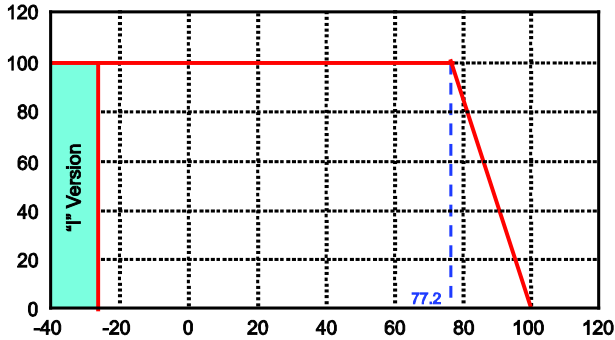


Derating Curve with Heatsink

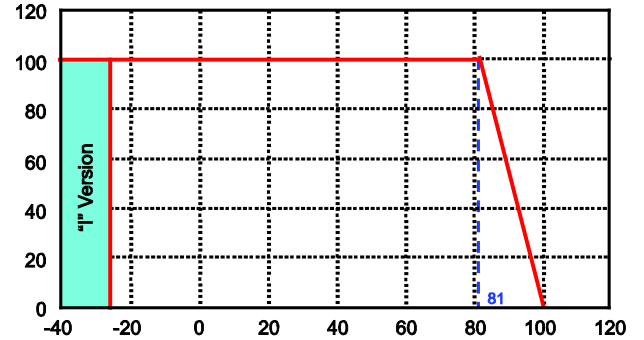

Efficiency vs Input Voltage

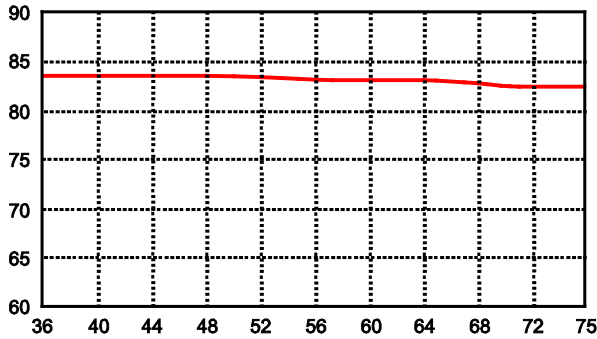


Efficiency vs Output Load

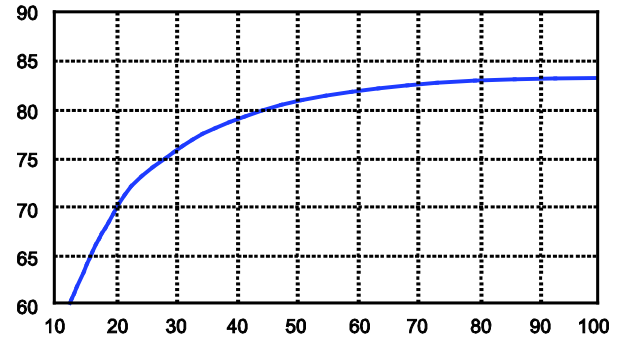


EMI FILTER

Recommended Filter for EN55022 Class B Compliance

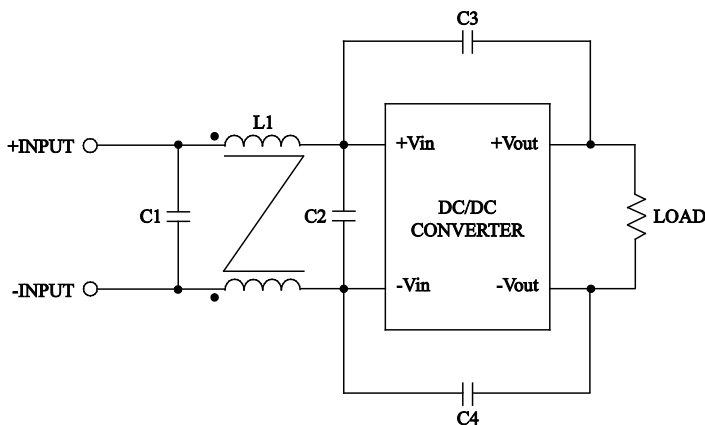


Recommended EN55022 Class B Filter Circuit Layout

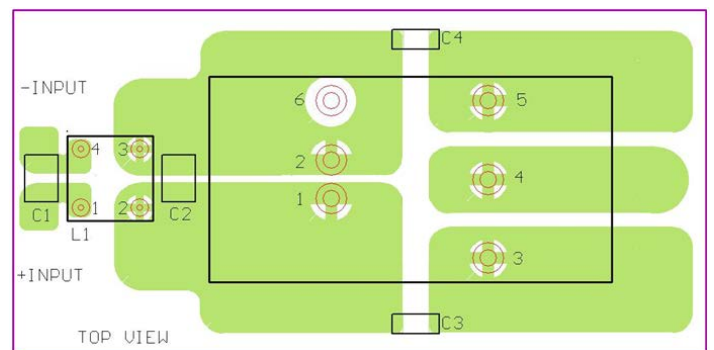

The components used in the figure above are as follows:

| Model | C1 | C2 | C3 | C4 | L1 |
|---------------------|-------------------------|-------------------------|-------------------|-------------------|----------------------------------|
| 24VDC nominal input | 2.2μF/50V 1812 MLCC | N/A | 1000P/2KV MLCC | 1000P/2KV MLCC | 325μH Common Choke PMT-050 |
| 48VDC nominal input | 2.2μF/100V 1812 MLCC | 2.2μF/100V 1812 MLCC | 1000P/2KV MLCC | 1000P/2KV MLCC | 325μH Common Choke PMT-050 |

MECHANICAL DRAWING

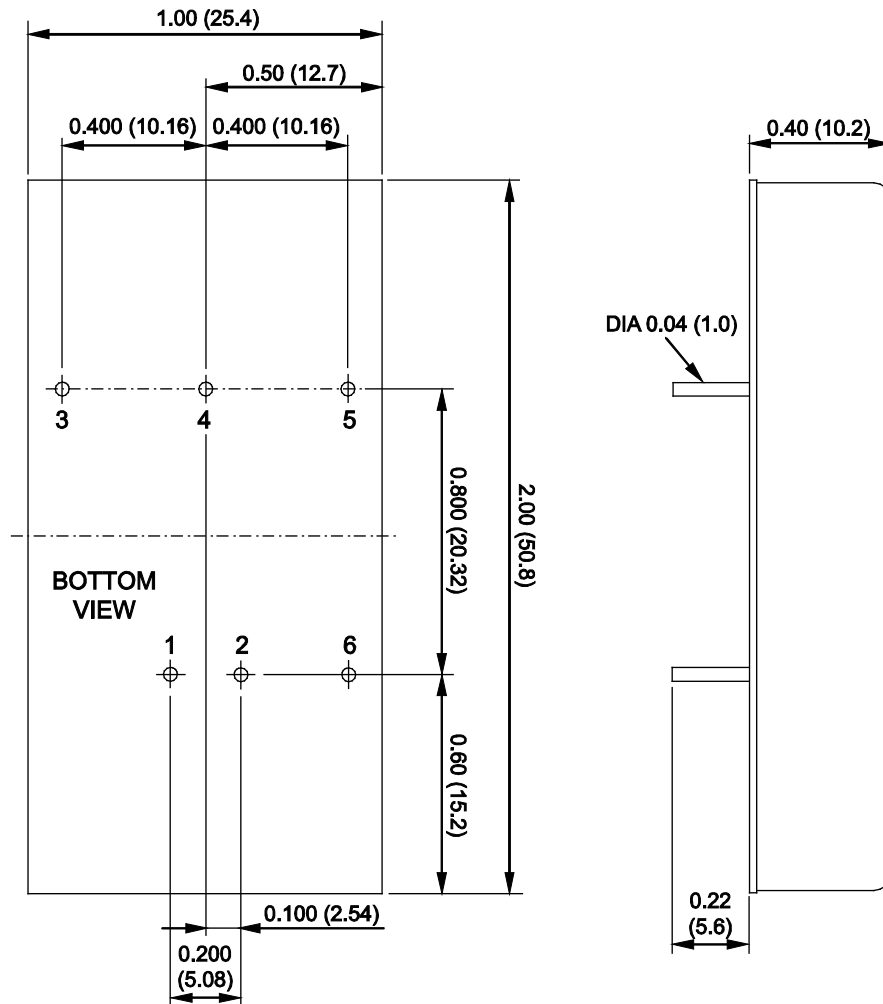

Unit: inches (mm)

| PIN CONNECTIONS | | |
|-----------------|-----------------|-----------------|
| Pin | Single | Dual |
| 1 | +Input | +Input |
| 2 | -Input | -Input |
| 3 | +Output | +Output |
| 4 | No Pin | Common |
| 5 | -Output | -Output |
| 6 | CTRL (optional) | CTRL (optional) |

Tolerance: X.XX±0.02 (X.X±0.5)
X.XXX±0.01 (X.XX±0.25)
Pin Pitch Tolerance: ±0.01 (±0.25)

COMPANY INFORMATION

Wall Industries, Inc. has created custom and modified units for over 50 years. Our in-house research and development engineers will provide a solution that exceeds your performance requirements on-time and on budget. Our ISO9001-2008 certification is just one example of our commitment to producing a high quality, well-documented product for our customers.

Our past projects demonstrate our commitment to you, our customer. Wall Industries, Inc. has a reputation for working closely with its customers to ensure each solution meets or exceeds form, fit and function requirements. We will continue to provide ongoing support for your project above and beyond the design and production phases. Give us a call today to discuss your future projects.

Contact **Wall Industries** for further information:

Phone: (603)778-2300
Toll Free: (888)587-9255
Fax: (603)778-9797
E-mail: sales@wallindustries.com
Web: www.wallindustries.com
Address: 5 Watson Brook Rd.
Exeter, NH 03833