



3.52"W x 7.44"L x 1.79"H

- Universal 90-264VAC Input
- cUL/UL 60601-1, EN 60601-1 Approved
- Regulated Outputs
- 4000V Isolation
- IEC320-C14 Input



Model Number	Output Voltage	Output Amps	Regulation	Output Watts	Output Connector
SINGLE OUTPUT					
AMP1011-02(S)	5	14	5%	70W	8 Pin DIN
AMP1011-03(S)	6	13.33	5%	80W	8 Pin DIN
AMP1011-04(S)	10	9	4%	90W	5 Pin DIN
AMP1011-05(S)	12	8.33	3%	100W	5 Pin DIN
AMP1011-06(S)	15	6.66	3%	100W	5 Pin DIN
AMP1011-07(S)	18	5.55	3%	100W	5 Pin DIN
AMP1011-08(S)	24	4.16	2%	100W	2.1mm Coax
AMP1011-09(S)	30	3.33	2%	100W	2.1mm Coax
AMP1011-10(S)	36	2.77	2%	100W	2.1mm Coax

Note: "(S)" Denotes that there is an ON/OFF Switch option available for the AMP101 family of products. To order an AMP101 product with the optional ON/OFF Switch, simply add an "S" to the end of the standard Part Number. For example AMP1011-02S.



3.52"W x 7.44"L x 1.79"H

- Universal 90-264VAC Input
- cUL/UL 60601-1, EN 60601-1 Approved
- Regulated Outputs
- 4000V Isolation
- IEC320-C14 Input



Model Number	Output Voltage	Output Amps	Regulation	Output Watts	Output Connector
--------------	----------------	-------------	------------	--------------	------------------

DUAL OUTPUT

AMP1012-00(S)	3.3/12	10/3	7/5%	69W	8 Pin DIN
AMP1012-01(S)	5/12	10/3	5/5%	80W	8 Pin DIN
AMP1012-02(S)	5/15	10/3	5/6%	80W	8 Pin DIN
AMP1012-03(S)	5/24	10/2	5/5%	80W	8 Pin DIN
AMP1012-04(S)	3.3/5	10/5	7/5%	55W	8 Pin DIN
AMP1012-09(S)	+/-12	7/1	5/5%	80W	5 Pin DIN
AMP1012-10(S)	+/-15	6/1	5/5%	80W	5 Pin DIN
AMP1012-12(S)	24/-24	3/1	5/5%	80W	5 Pin DIN
AMP1012-15(S)	5/-24	10/1	5/5%	74W	5 Pin DIN

TRIPLE OUTPUT

AMP1013-00(S)	3.3,+/-12	10/3/1	7/5/5%	74W	8 Pin DIN
AMP1013-00-1(S)	3.3/12/12	10/3/1	7/5/5%	74W	8 Pin DIN
AMP1013-01(S)	5/12/-5	10/3/1	5/5/5%	80W	8 Pin DIN
AMP1013-01-1(S)	5/12/5	10/3/1	5/5/5%	80W	8 Pin DIN
AMP1013-02(S)	5,+/-12	10/3/1	5/5/5%	80W	8 Pin DIN
AMP1013-02-1(S)	5/12/12	10/3/1	5/5/5%	80W	8 Pin DIN
AMP1013-03(S)	5,+/-15	10/3/1	5/6/5%	80W	8 Pin DIN
AMP1013-03-1(S)	5/15/15	10/3/1	5/6/5%	80W	8 Pin DIN
AMP1013-04(S)	5,+/-24	10/3/1	5/5/5%	80W	8 Pin DIN
AMP1013-04-1(S)	5/24/24	10/3/1	5/5/5%	80W	8 Pin DIN
AMP1013-05(S)	5/24/-12	10/3/1	5/5/5%	80W	8 Pin DIN
AMP1013-05-1(S)	5/24/12	10/3/1	5/5/5%	80W	8 Pin DIN
AMP1013-06(S)	3.3/12/-5	10/3/1	7/5/5%	74W	8 Pin DIN
AMP1013-06-1(S)	3.3/12/5	10/3/1	7/5/5%	74W	8 Pin DIN
AMP1013-08(S)	3.3/5/-12	10/3/1	7/5/5%	60W	8 Pin DIN
AMP1013-08-1(S)	3.3/5/12	10/3/1	7/5/5%	60W	8 Pin DIN

Note: "(S)" Denotes that there is an ON/OFF Switch option available for the AMP101 family of products. To order an AMP101 product with the optional ON/OFF Switch, simply add an "S" to the end of the standard Part Number. For example AMP1012-02S.

INPUT SPECIFICATIONS

Input Voltage Range	90-264 VAC
Frequency Range	47-63 Hz
Leakage Current	0.1mA typ. @ 240VAC

OUTPUT SPECIFICATIONS

Voltage and Current	See Selection Charts
Load Regulation	See Selection Charts
Line Regulation	+/- 0.5%, typ (1% Max.)
Ripple/Noise	0.5% Pk-Pk, typ (1% Max.)
Hold Up Time	16mS min. at 110VAC Input

GENERAL SPECIFICATIONS

Input-Output Isolation	4000VAC
Efficiency	70% min.
Safety	cUL/UL60601-1, EN60601-1


PHYSICAL SPECIFICATIONS

Size	7.44" x 3.52" x 1.79"
Construction	Desktop Style
Weight	1.7 (771g)

ENVIRONMENTAL SPECIFICATIONS

Oper. Temperature	0 to +70°C
	See Derate Curve
Storage Temperature	-40 to +85°C *
Relative Humidity	5 to + 95%, non-cond *
MTBF	100,000 Hrs
EMC	Vin = 220VAC CISPR-11 B
	Vin = 110VAC FCC Part 18 B


OUTPUT DERATING CURVE

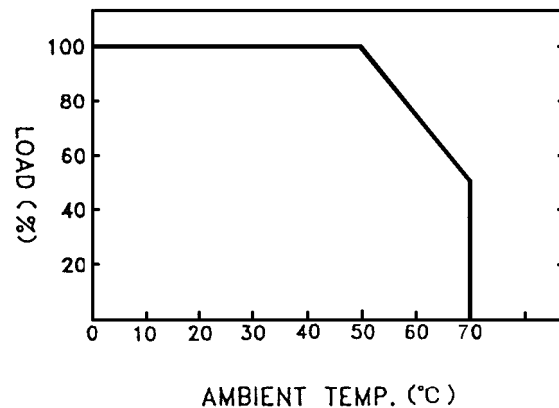

* These are stress ratings. Exposure of the devices to any of these conditions may adversely affect long term reliability. Proper operation under conditions other than the standard operating conditions is neither warranted nor implied.

All specifications are typical at nominal input, full load, and 25°C unless otherwise noted

MECHANICAL DIMENSIONS

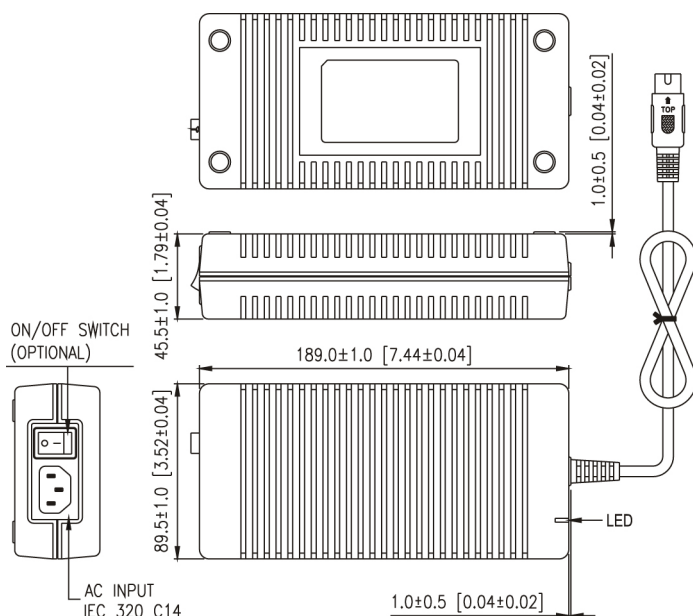

Coaxial Plug:

5.5mm outer diameter
2.1mm inner diameter, female
11mm length, center "+"



DIN Connector

8 Pin DIN



5 Pin DIN



Single Output

- | | |
|---------|-------------|
| 1. COM | 6. COM |
| 2. COM | 7. Vout |
| 3. Vout | 8. Vout |
| 4. COM | Shell = GND |
| 5. Vout | |

- | |
|-------------|
| 1. COM |
| 2. COM |
| 3. Vout |
| 4. COM |
| 5. Vout |
| Shell = GND |

Dual Output

- | | |
|----------|-------------|
| 1. COM | 6. COM |
| 2. Vout2 | 7. Vout1 |
| 3. Vout1 | 8. COM |
| 4. Vout2 | Shell = GND |
| 5. Vout1 | |

- | |
|------------------|
| 1. COM |
| 2. COM |
| 3. Output #1 |
| 4. No Connection |
| 5. Output #2 |
| Shell = GND |

Triple Output

- | | |
|----------|-------------|
| 1. Vout1 | 6. Vout1 |
| 2. COM | 7. COM |
| 3. Vout3 | 8. COM |
| 4. Vout1 | Shell = GND |
| 5. Vout2 | |

- | |
|--------------|
| 1. COM |
| 2. COM |
| 3. Output #1 |
| 4. Output #3 |
| 5. Output #2 |
| Shell = GND |