


Model:PTC7

Characteristics:

Small leakage,Low noise,High efficiency,Low no load current,PCB mounting,Used for supper acoustics,Medical equipment,Military engineering,Precision instrument,using the imported high quality toroidal core Primary working voltage:110×2/115×2/120×2/(Can be customized according to customer's requirements)

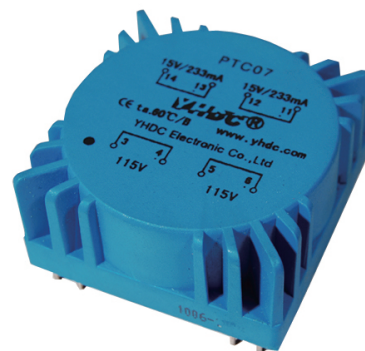

Technical index:

Mounting type:PCB

Flame resistance:UL94-V0

Insulation class:B grade

Work temperature:-30℃~+60℃

Frequency range:50Hz~60Hz

Dielectric strength:P1/P2: 600V AC

S1/S2: 600V AC


P/S: 4000V AC

Electrical data:


Primary voltage	110×2/115×2/120×2	V
Primary voltage range	±10	%
Voltage regulation	≤27	%
Power	7	VA
Temperature rising	≤20	℃
No load loss	<0.2	W
weight	175	g

Secondary voltage	Secondary no load voltage	Secondary full load current
7V×2	9.5V×2	500mA
9V×2	12.2V×2	389mA
12V×2	16.2V×2	292mA
15V×2	20.3V×2	233mA
18V×2	24.3V×2	194mA
22V×2	29.7V×2	159mA


Schematic Diagram:



Dimension(mm):

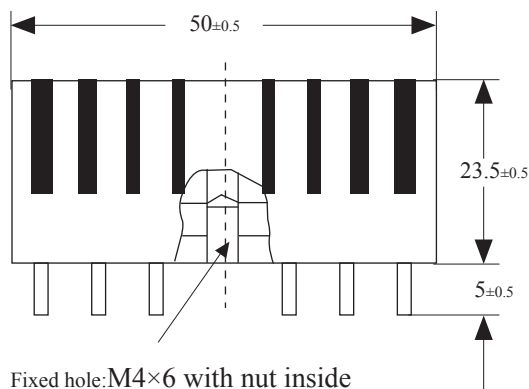

Front View

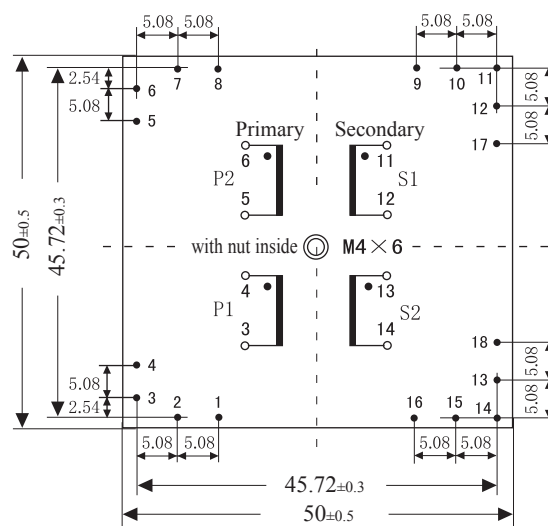

Bottom View