



ROHS

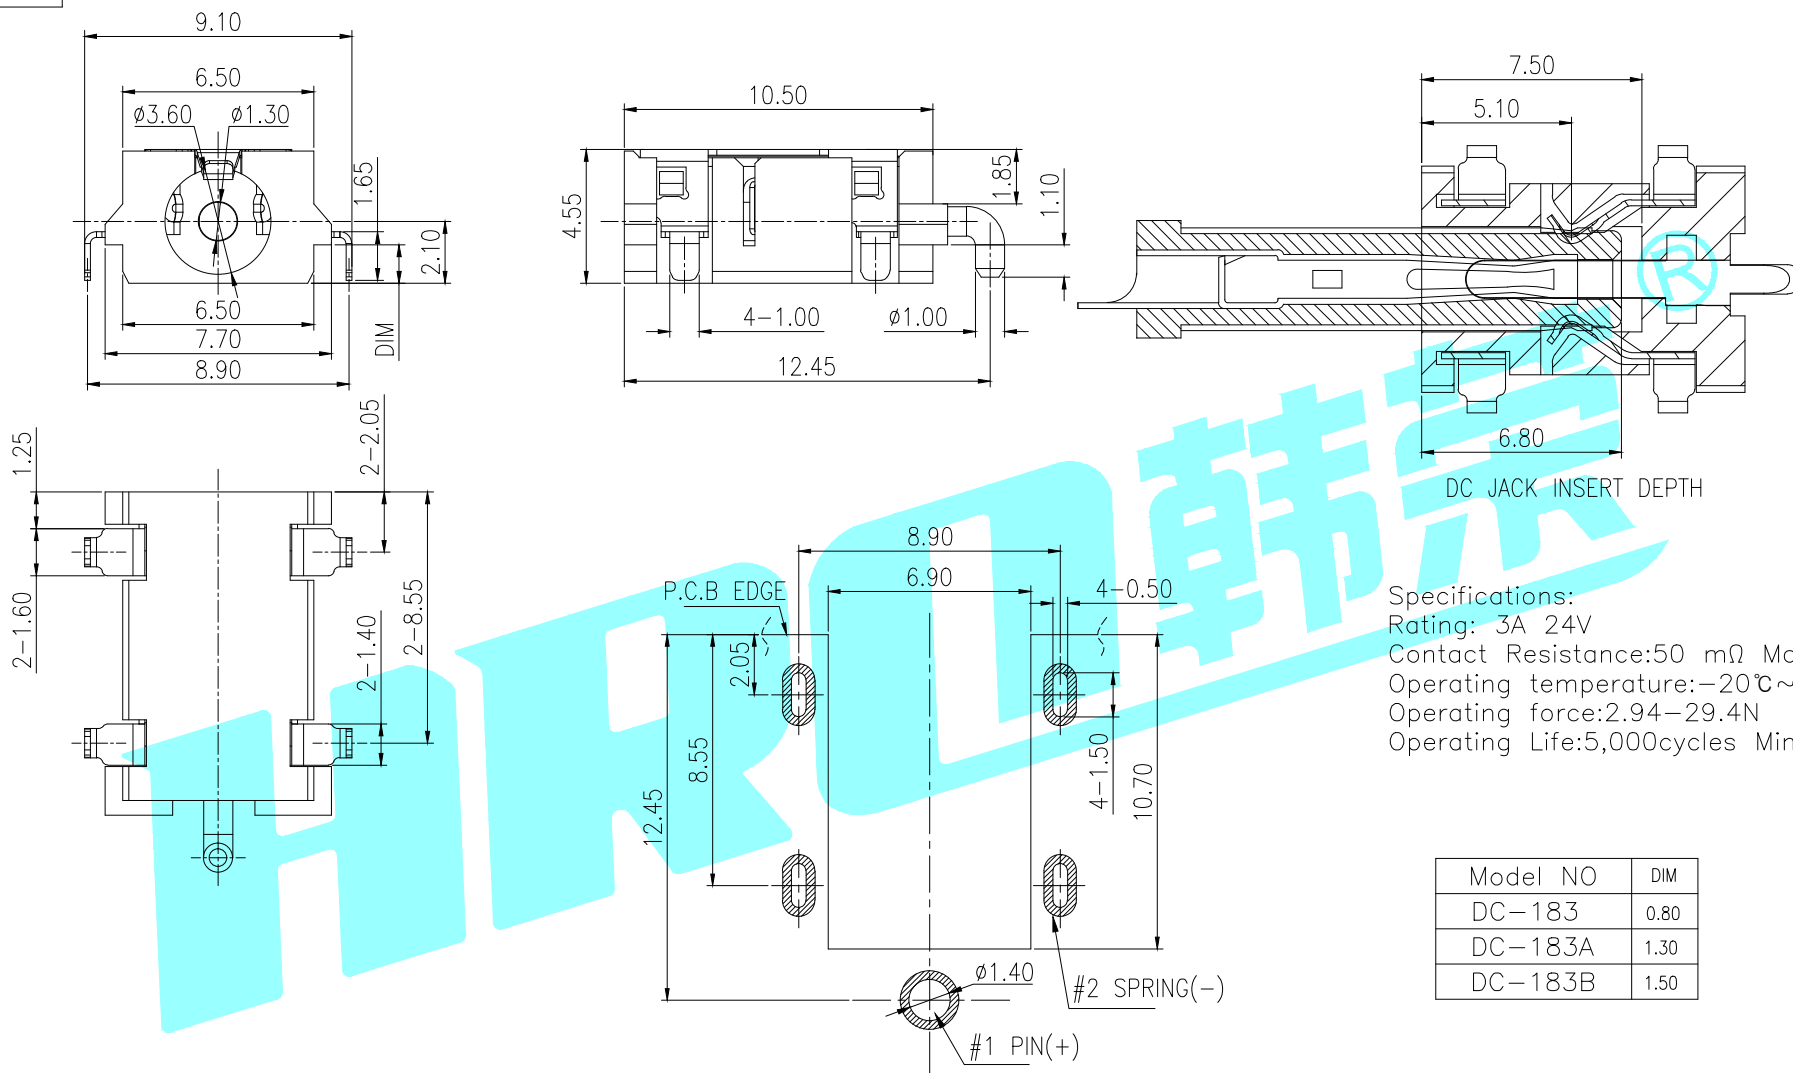

Specifications:
 Rating: 3A 24V
 Contact Resistance: 50 mΩ Max.
 Operating temperature: -20℃~70℃
 Operating force: 2.94-29.4N
 Operating Life: 5,000cycles Min

Model NO	DIM
DC-183	0.80
DC-183A	1.30
DC-183B	1.50



CIRCUIT DIAGRAM

RECOMMENDED PCB LAYOUT
 TOP VIEW (TOLERANCE:±0.05)

ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
③	Center Pin	—	1	COPPER ALLOY	Au Plating	—
②	Terminal	—	1	COPPER ALLOY	Au Plating	—
①	Housing	—	1	HTP	Black	—

APPROVALS		DATE		HRO 韓豪® ELECTRONICS CO.,LTD		
DRAWN	LIUCAN	2021.4.13		TITLE:	DC JACKS	
APPROVALS				PART NO.		
TOLERANCES ARE		30~以上 10~30 5~10 ~ 5	±0.30 ±0.20 ±0.15 ±0.10	ANGLE	UNIT: mm	SCALE: 1:1
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
—	A	—	NEW	—	—	—