



## Applications

- Broadband tuners
- DOCSIS 3.0 gateways
- DOCSIS 3.0 cable modems

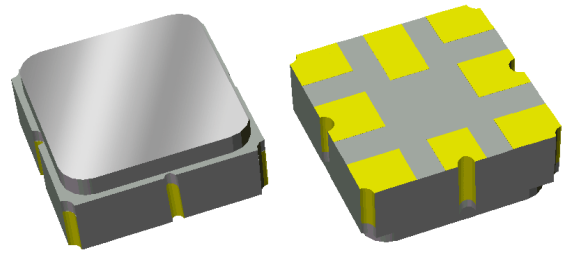


SMP-12D 3.00 x 3.00 x 1.22 mm

## Product Features

- Usable bandwidth 100 MHz
- High attenuation
- Balanced operation
- Small Size: 3.00 x 3.00 x 1.22 mm
- Ceramic Surface Mount Package (SMP)
- Hermetic
- RoHS (2002/95/EC) compliant, Pb-free 

## Functional Block Diagram

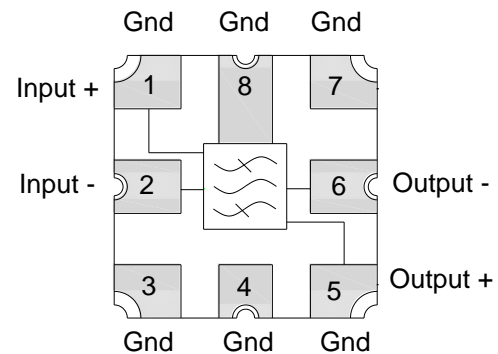

Top View

## General Description

Tuner IF filter for applications where higher bandwidths, up to 100 MHz, are needed to support DOCSIS 3.0. The design supports industry accepted reference designs and supports the high attenuation demands of CATV set-top boxes.

## Pin Configuration

Pin No.	Label
1	Input +
2	Input -
5	Output +
6	Output -
3,4,7,8	Ground

## Ordering Information

Part No.	Description
856653	Packaged Part
856653-EVB	Evaluation board

Standard T/R size = 5000 units/reel

### Absolute Maximum Ratings

Parameter	Rating
Storage Temperature <sup>(1)</sup>	- 40 to + 85 °C
Operable Temperature <sup>(1)</sup>	- 40 to + 85 °C

1. Operation of this device outside the parameter ranges given may cause permanent damage.

### Electrical Specifications <sup>(1) (3)</sup>

Test conditions unless otherwise noted: <sup>(2)</sup> Temperature Range 0 to + 70 °C

Parameter	Conditions	Min	Typical <sup>(4)</sup>	Max	Units
Center Frequency		-	1250	-	MHz
Maximum Insertion Loss	1200 – 1300 MHz	-	6.8	8	dB
Amplitude Variation	1200 – 1300 MHz	-	1.1	3.0	dB p-p
	1200 – 1300 MHz (in any 8 MHz channel)	-	1.1	2.0	
Group Delay Ripple	1200 – 1300 MHz	-	18	60	ns p-p
	1200 – 1300 MHz (in any 8 MHz channel)	-	8	18	
Attenuation <sup>(5)</sup>	800 – 1052 MHz	45	55	-	dB
	1052 – 1152 MHz	40	50	-	
	1350 – 1450 MHz	20	25	-	
	1450 – 2000 MHz	40	50	-	
Input / Output Return Loss	1200 – 1300 MHz	-	9	-	dB



Test conditions unless otherwise noted: <sup>(2)</sup> Temperature Range - 40 to + 85 °C

Parameter	Conditions	Min	Typical <sup>(4)</sup>	Max	Units
Maximum Insertion Loss	1200 – 1300 MHz	-	6.8	8.5	dB
Amplitude Variation	1200 – 1300 MHz	-	1.1	3.0	dB p-p
	1200 – 1300 MHz (in any 8 MHz channel)	-	1.1	2.0	
Group Delay Ripple	1200 – 1300 MHz	-	18	60	ns p-p
	1200 – 1300 MHz (in any 8 MHz channel)	-	8	18	
Attenuation <sup>(5)</sup>	800 – 1052 MHz	45	55	-	dB
	1052 – 1152 MHz	40	50	-	
	1350 – 1450 MHz	20	25	-	
	1450 – 2000 MHz	40	50	-	
Input / Output Return Loss	1200 – 1300 MHz	-	9	-	dB
Source/Load Impedance <sup>(6)</sup>	Balanced	-	200	-	Ω

Notes:

1. All specifications are based on the TriQuint schematic for the main reference design shown on page 3
2. In production, devices will be tested at room temperature to a guardbanded specification to ensure electrical compliance over temperature
3. Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances
4. Typical values are based on average measurements at room temperature
5. Relative to zero dB
6. This is the optimum impedance in order to achieve the performance shown

**960686 Evaluation Board**





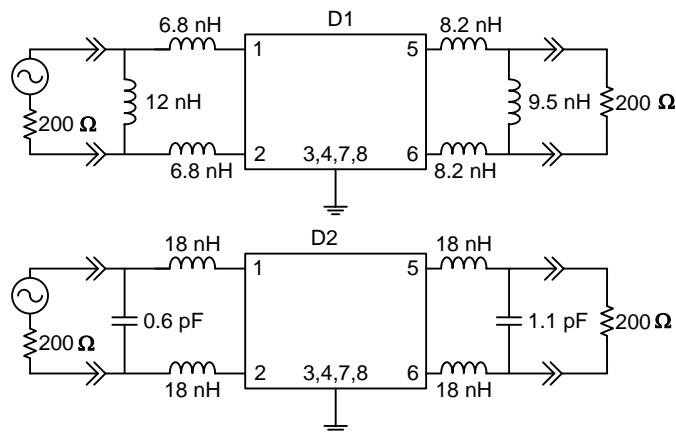
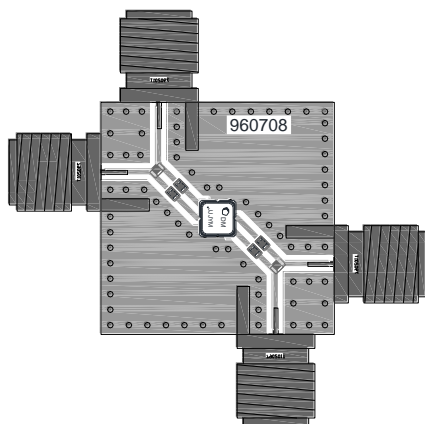


Notes:  
 3-layers board - top, middle & bottom layer: 1 oz copper  
 Substrates: .031" thick FR4 dielectric.  
 Finish plating: Nickel: 3-8  $\mu$ m thick, Gold: .03-.2  $\mu$ m thick  
 Hole plating: Copper min .0008  $\mu$ m thick





**Bill of Material**

Reference Des. D1	Value	Description	Manuf.	Part Number
L1	12 nH	Coil Wire-wound, 0402, $\pm$ 3%	Murata	LQW15AN12NH00
L2	6.8 nH	Coil Wire-wound, 0402, $\pm$ 3%	Murata	LQW15AN6N8H00
L3	6.8 nH	Coil Wire-wound, 0402, $\pm$ 3%	Murata	LQW15AN6N8H00
L4	8.2 nH	Coil Wire-wound, 0402, $\pm$ 3%	Murata	LQW15AN8N2H00
L5	8.2 nH	Coil Wire-wound, 0402, $\pm$ 3%	Murata	LQW15AN8N2H00
L6	9.5 nH	Coil Wire-wound, 0402, $\pm$ 3%	Murata	LQW15AN9N5H00
Reference Des. D2	Value	Description	Manuf.	Part Number
L1	18 nH	Coil Wire-wound, 0402, $\pm$ 3%	Murata	LQW15AN18NH00
L2	18 nH	Coil Wire-wound, 0402, $\pm$ 3%	Murata	LQW15AN18NH00
L3	18 nH	Coil Wire-wound, 0402, $\pm$ 3%	Murata	LQW15AN18NH00
L4	18 nH	Coil Wire-wound, 0402, $\pm$ 3%	Murata	LQW15AN18NH00
C1	0.6 pF	Cer. Chip Capacitor, 0402 $\pm$ 0.1 pF	Murata	GJM1555C1HR60BB01
C2	1.1 pF	Cer. Chip Capacitor, 0402 $\pm$ 0.1 pF	Murata	GJM1555C1H1R1BB01
SMA	N/A	SMA connector	Johnson Components	142-0701-801
PCB	N/A	3-layer	Multiple	960708


**Performance Plots D1** (Test conditions unless otherwise noted: Temp.= + 25 °C)

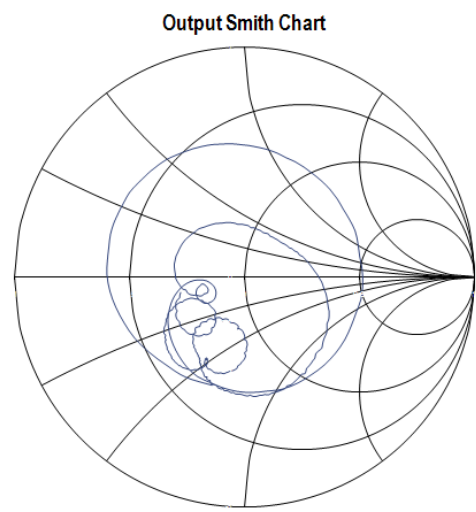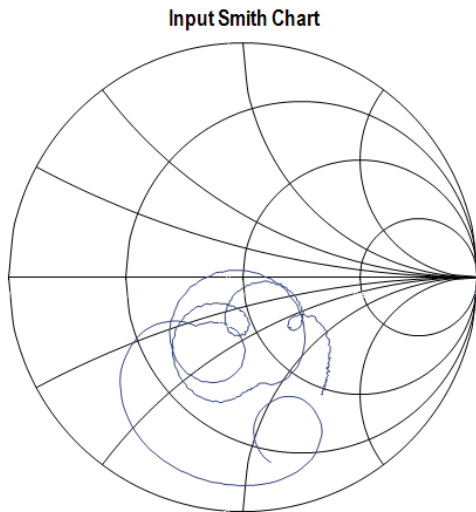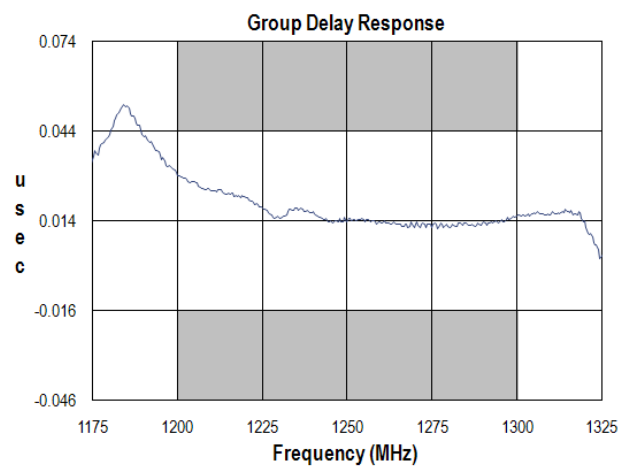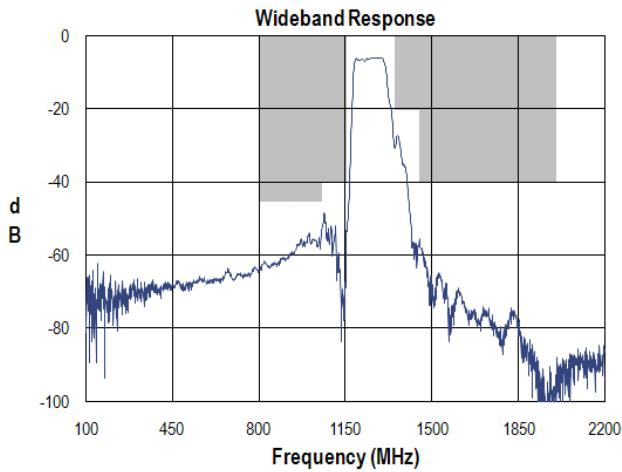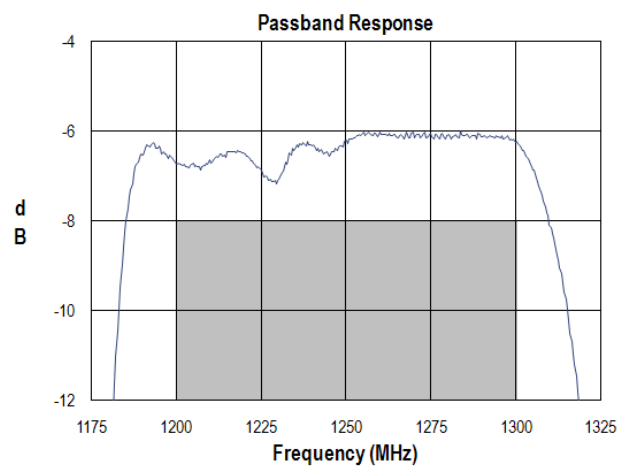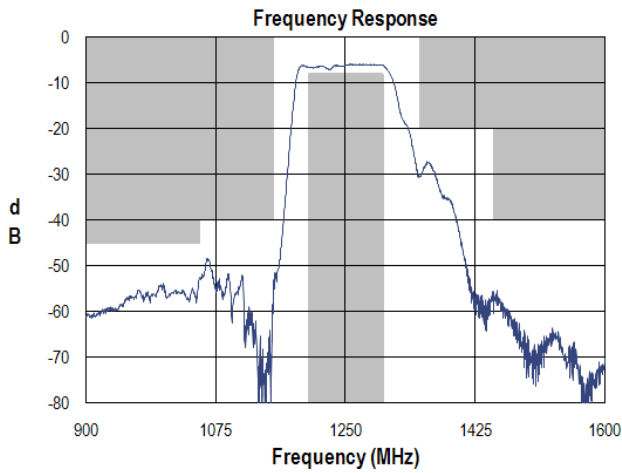


**Performance Plots D2** (Test conditions unless otherwise noted: Temp.= + 25 °C)

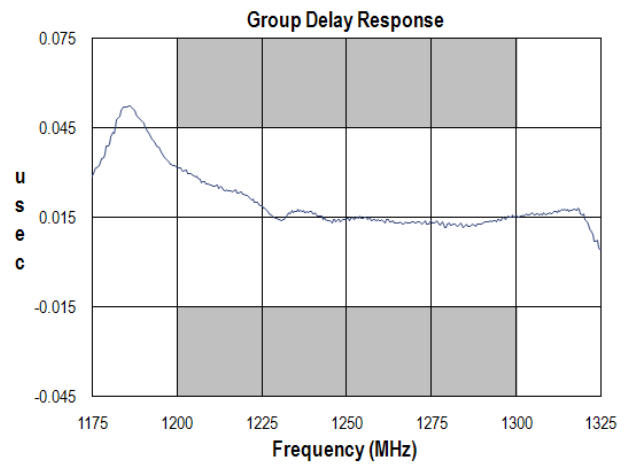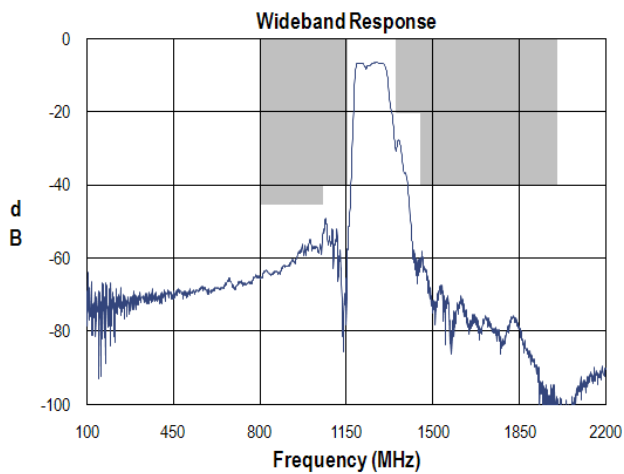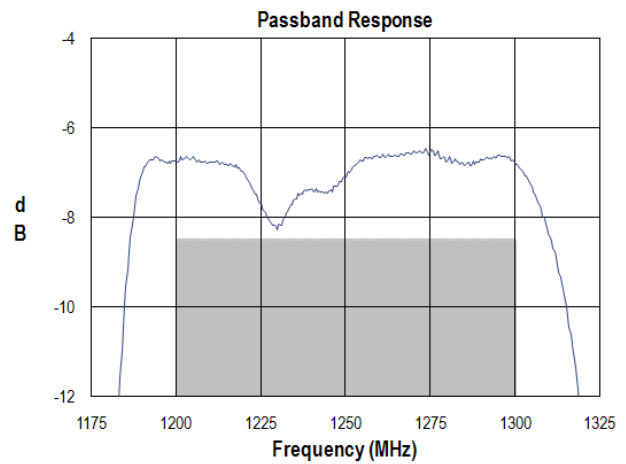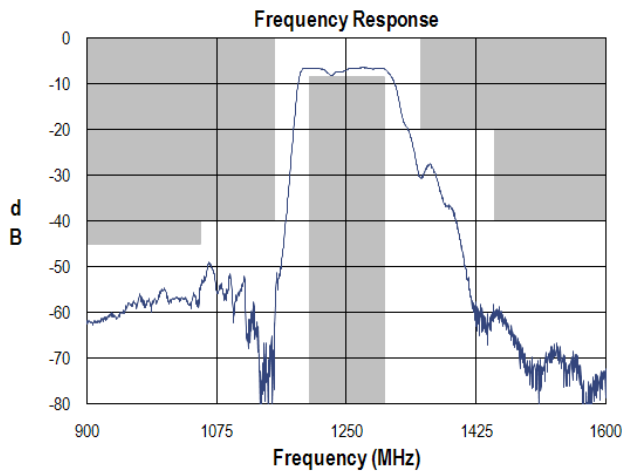


**Input Smith Chart**

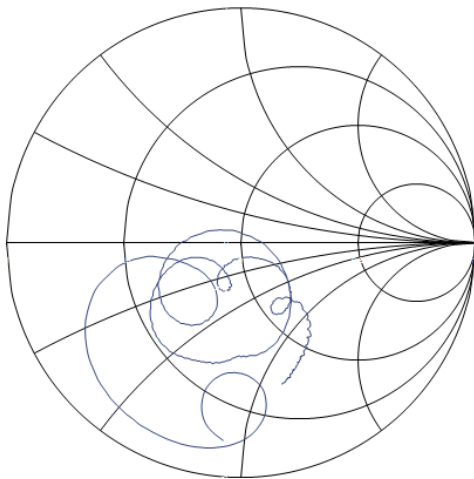

**Output Smith Chart**

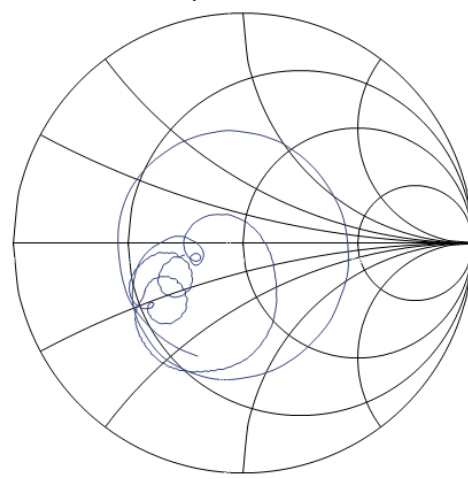

### Mechanical Information

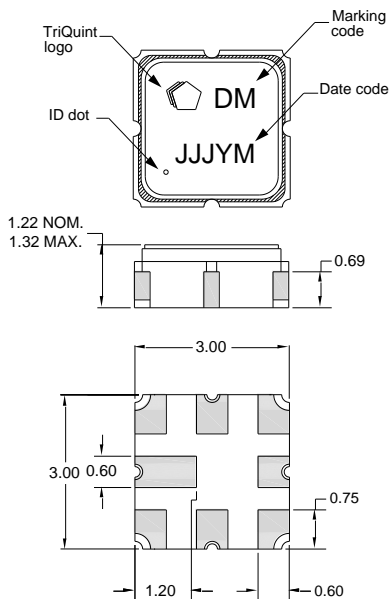

Package Style: SMP-12D

Dimensions: 3.00 x 3.00 x 1.22 mm

Body:  $Al_2O_3$  ceramic

Lid: Kovar, Ni plated

Terminations: Au plating 0.5 - 1.0  $\mu m$ , over a 2-6  $\mu m$  Ni plating

All dimensions shown are nominal in millimeters


All tolerances are  $\pm 0.15$  mm except overall length and width  $\pm 0.10$  mm

The date code consists of day of the current year (Julian, 3 digits), Y = last digit of the year, and M = manufacturing site code

Notes:

1. All dimensions shown are typical in millimeters
2. An asterisk (\*) in front of the marking code indicates prototype.

### PCB Mounting Pattern

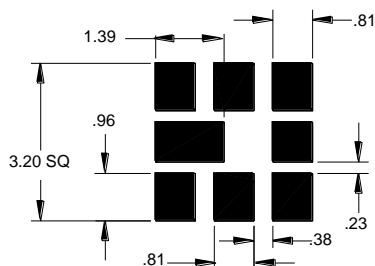


Notes:

1. All dimensions are in millimeters. Angles are in degrees.
2. This drawing specifies the mounting pattern used on the TriQuint evaluation board for this product. Some modification may be necessary to suit end user assembly materials and processes.

### Tape and Reel information

Standard T/R size = 5000 units / reel . All dimensions are in millimeters

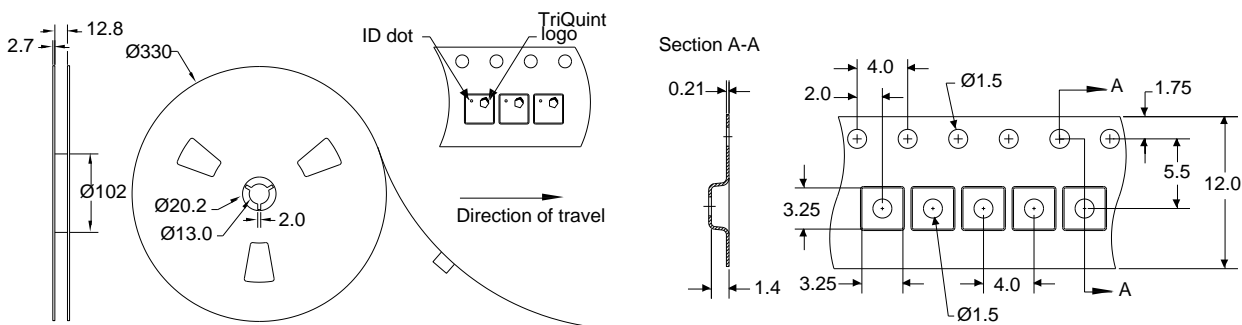

## Product Compliance Information

### ESD Sensitivity Ratings



Caution! ESD-Sensitive Device

ESD Rating: 1A

Value: Passes  $\geq 300$  V min.  
Test: Human Body Model (HBM)  
Standard: ESDA/JEDEC JS-001-2012

ESD Rating: A

Value: Passes  $\geq 150$  V min.  
Test: Machine Model (MM)  
Standard: JEDEC Standard JESD22-A115

### MSL Rating

Not applicable. Hermetic package.

### Solderability

Compatible with both lead-free (260 °C maximum reflow temperature) and tin/lead (245 °C maximum reflow temperature) soldering processes.

Refer to [Soldering Profile](#) for recommended guidelines.

### RoHS Compliance

This part is compliant with EU 2002/95/EC RoHS directive (Restrictions on the Use of Certain Hazardous Substances in Electrical and Electronic Equipment).

This product also has the following attributes:

- Lead Free
- Halogen Free (Chlorine, Bromine)
- Antimony Free
- TBBP-A (C<sub>15</sub>H<sub>12</sub>Br<sub>4</sub>O<sub>2</sub>) Free
- PFOS Free
- SVHC Free

## Contact Information

For the latest specifications, additional product information, worldwide sales and distribution locations, and information about TriQuint:

Web: [www.triquint.com](http://www.triquint.com)  
Email: [info-sales@tqs.com](mailto:info-sales@tqs.com)

Tel: +1.407.886.8860  
Fax: +1.407.886.7061

For technical questions and application information:

Email: [flapplication.engineering@tqs.com](mailto:flapplication.engineering@tqs.com)

## Important Notice

The information contained herein is believed to be reliable. TriQuint makes no warranties regarding the information contained herein. TriQuint assumes no responsibility or liability whatsoever for any of the information contained herein. TriQuint assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for TriQuint products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information.

TriQuint products are not warranted or authorized for use as critical components in medical, life-saving, or life-sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.