


REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

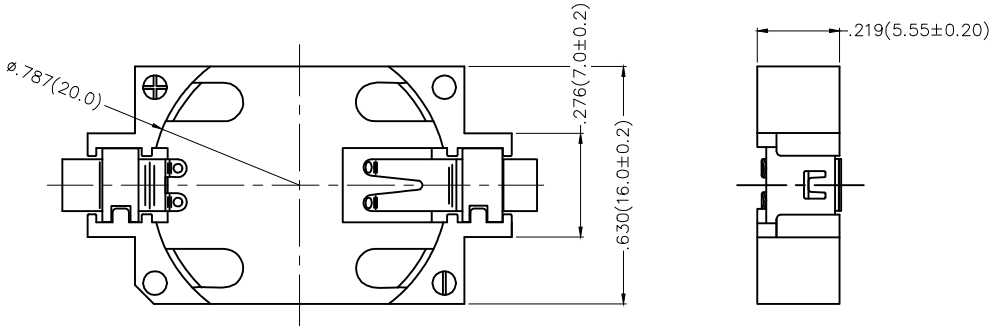

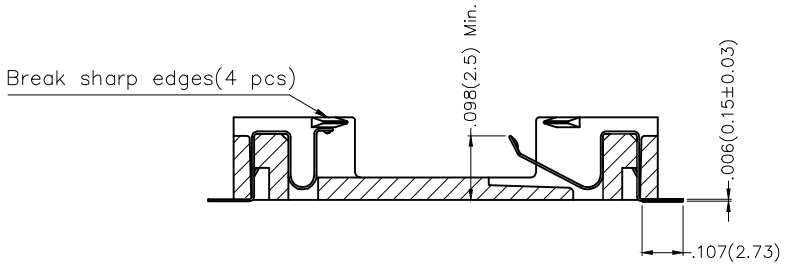


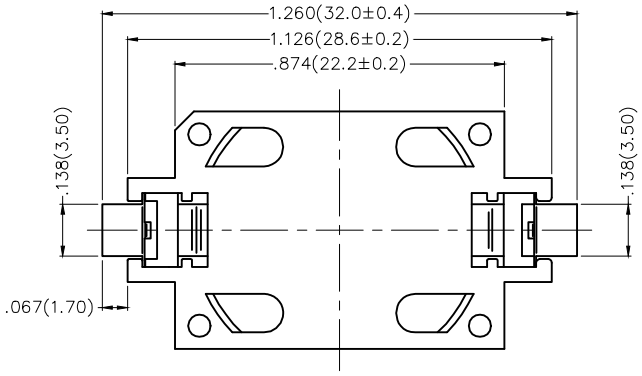

SPECIFICATIONS

Electrical
- Voltage Rating: 3V AC(rms)/DC
- Contact Resistance: 30 mΩ Max
- Insulation Resistance: 1000 MΩ Min
- Withstanding Voltage: 500V AC r.m.s
- Temperature Range–Operating: −40°C~+105°C

Material And Plating
- Housing: LCP (UL 94V–0) Natural
- Terminal: Phosphor bronze/ Gold plated

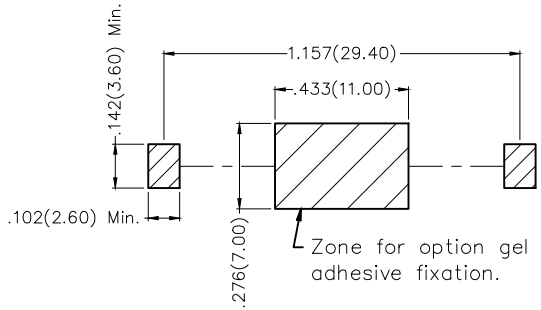

Recommended P.C.Board Layout

General Tolerances: ±0.05mm

THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY	DATE	PART NO.	ITEM NO.	TXGA Leader Of Industry
	X.±.012(0.30)	X.°±5°	FRANK	13/DEC/16	FBA00007-02S2003K	FBA00007	
DESIGN UNITS Inch (metric)	X.X±.008(0.20)	.X°±2°	CHECKED BY CHERRY	DATE 13/DEC/16	TITLE Battery Connector 180° Vertical(SMT)		REV 0 / SHEET NO. 1/1
	X.XX±.006(0.15)	.XX°±1°	DRAWN BY	DATE			
SCALE 5:1 / SIZE A4	X.XXX±.004(0.10)	.XXX°±0.5°	KATE	13/DEC/16	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		