

6

5

4

3





2

1

Rev	AWO #	Description	Date	Appr
-	7790	RELEASED	5/10/07	

APPROVED: _____

DATE: _____ TITLE: _____

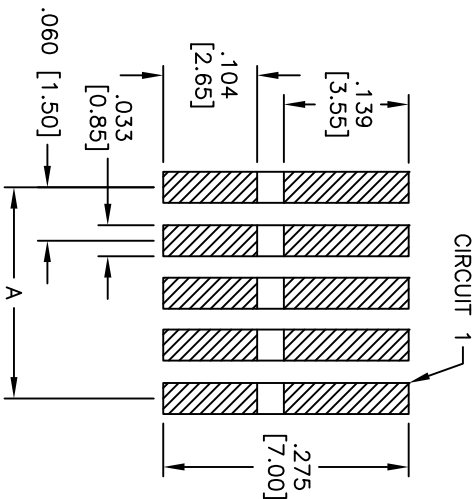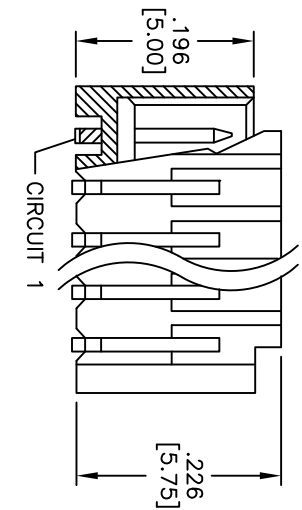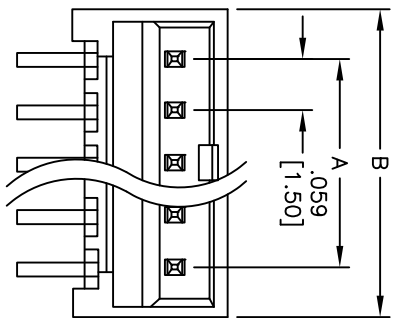

PCB LAYOUT

SPECIFICATIONS:

Material:

Insulator: Hi-temp thermoplastic, rated UL 94V-0

Insulator color: Ivory

Contacts: Brass

Plating:

Tin over Nickel underplate overall

Electrical:

Operating voltage: 100 VAC max

Current rating: 1.5 Amps max

Contact resistance: 20 mohms max

Insulation resistance: 500 Mohms min

Dielectric withstanding voltage: 500 VAC for 1 minute

Temperature Rating:

Operating temperature: -25°C to +85°C

Environmental:

Lead free, RoHS compliant.



A=.060 [1.50] X No. of Positions -1
 B=.060 [1.50] X No. of Positions + .051 [1.30]

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED
 INCHES
 .X ± .10 ØXX ± .10
 .XX ± .020 ØXXX ± .015
 .XXX ± .015 ØXXXX ± .010

APPROVALS	DATE
DRAWN	BW
CHECKED	
APPROVED	

TITLE: MX1.5mm WAFER 180°
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

ADAM TECH

SIZE	PART NO.	SCALE	SHEET 1 OF 1
X	15SH-B-XX-TS-SMT	NTS	

6

5

4

3

2

1