

Receptacles

M23 Male, Panel Mount




Specifications

Receptacle Shell	Nickel-plated brass
Connector Insert	Nylon
Contacts	Machine brass with gold over nickel plating
Wire Insulation	Oil resistant PVC, 18AWG stranded copper, 300V
Cable Approvals	UL recognized and CSA certified
Enclosure Rating	IP67, NEMA 6P
Temperature	-20°C to +105°C (-4°F to +221°F)

Features

- 18AWG conductors for ease of wiring
- 12-pin configuration provides standard connectivity
- M20 x 1.5 threads for convenient mounting to safety switches
- Mounting nut and rubber sealing washer included

Dimensions—mm (inches)

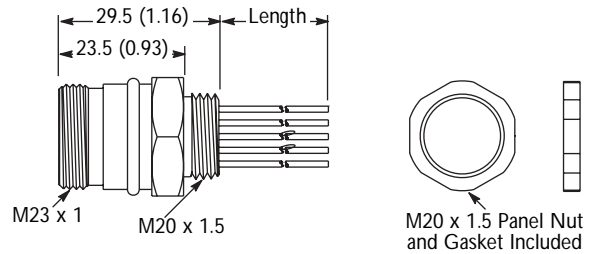

Dimensions are approximate. Illustrations are not drawn to scale.

Product Selection

Face View of Male	Cable			Panel Mount Threads	Catalogue Number
	Wire Colour	Wire Rating	Length—m (ft)		
	1 Brown 2 Blue 3 Grey 4 Pink 5 Red 6 Yellow 7 White 8 Red/Blue 9 Black 10 Violet 11 Grey/Pink 12 Green	18AWG 60V 4A	0.15 (0.5)	M20 x 1.5	888M-M12AE-0F5
	1 Brown 2 NA 3 Blue 4 White 5 NA 6 Green 7 Yellow 8 Grey 9 Pink 10 Red 11 NA 12 Green/Yellow				888M-M12X9AE-0F5