




FEATURES


- Covers 2.4 to 2.5 GHz for 802.11b, and 4.9 to 6 GHz for 802.11a and all US, European, and Japanese WLAN applications
- Omni-directional patterns at all frequencies with increased gain in upper bands for optimal coverage

PARAMETER	SPECIFICATION
Frequency	2.4 - 2.5 GHz 4.9 - 5.875 GHz
Gain	2.1 dBi (2.45 GHz) 2.4 dBi (4.9 GHz) 2.6 dBi (5.25 GHz) 3.4 dBi (5.875 GHz)
Polarization	Vertical, Omni-directional
Nominal Impedance	50 ohms
VSWR	2:1 max across all bands
Size	95.9 mm (180° straight) or 75.4 mm (90° bent) x 9.3 mm dia.

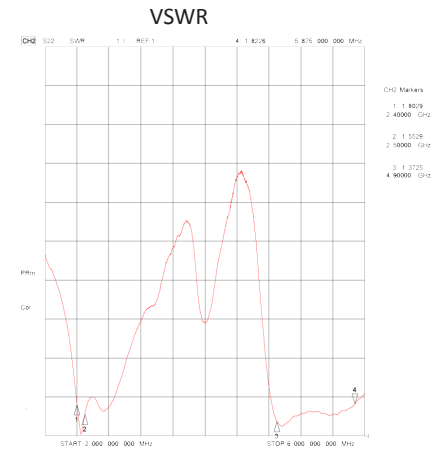

FREQUENCIES AND CONNECTORS

MODEL #	PART #	COLOR	CONNECTOR
WTSB2450- RPSMA	MAF94051	Black	RP-SMA
WTS2450- RPSMA	MAF94110	White	RP-SMA
WTSB2450- SMA	MAF94271	Black	SMA

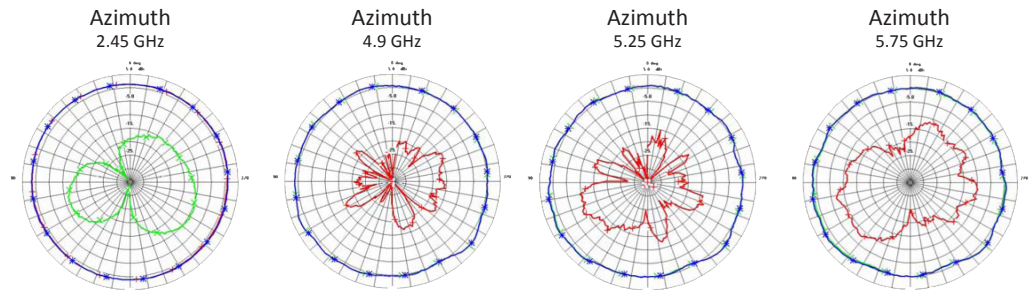

Americas: +1.847.839.6907
IAS-AmericasEastSales@lairdtech.com

Europe: +44.1628.858941
IAS-EUSales@lairdtech.com

Asia: +86.21.5855.0827.127
IAS-AsiaSales@lairdtech.com

www.lairdtech.com

ANT-DS-WTS 2450 080114

Any information furnished by Laird, Inc. and its agents is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird materials rests with the end user; since Laird and its agents cannot be aware of all potential uses, Laird makes no warranties as to the fitness, merchantability or suitability of any Laird materials or products for any specific or general uses. Laird shall not be liable for incidental or consequential damages of any kind. All Laird products are sold pursuant to the Laird Terms and Conditions of sale in effect from time to time, a copy of which will be furnished upon request. © Copyright 2014 Laird, Inc. All Rights Reserved. Laird, the Laird Logo, and other marks are trade marks or registered trade marks of Laird, Inc. or an affiliate company thereof. Other product or service names may be the property of third parties. Nothing herein provides a license under any Laird or any third party intellectual property rights.